

## Вариант 12


ФИО Крагель Алина Олеговна

3 курс, группа 9


### Part 1.

Основные команды: enable – переход в привилегированный режим, config terminal – переход в глобальное конфигурирование, exit – выходим из режима конфигурации.

1. Добавляем описание для всех маршрутизаторов сети командами interface \*interface name\* (переход в конфигурацию интерфейса) и description \*description\* (назначение описания интерфейса).

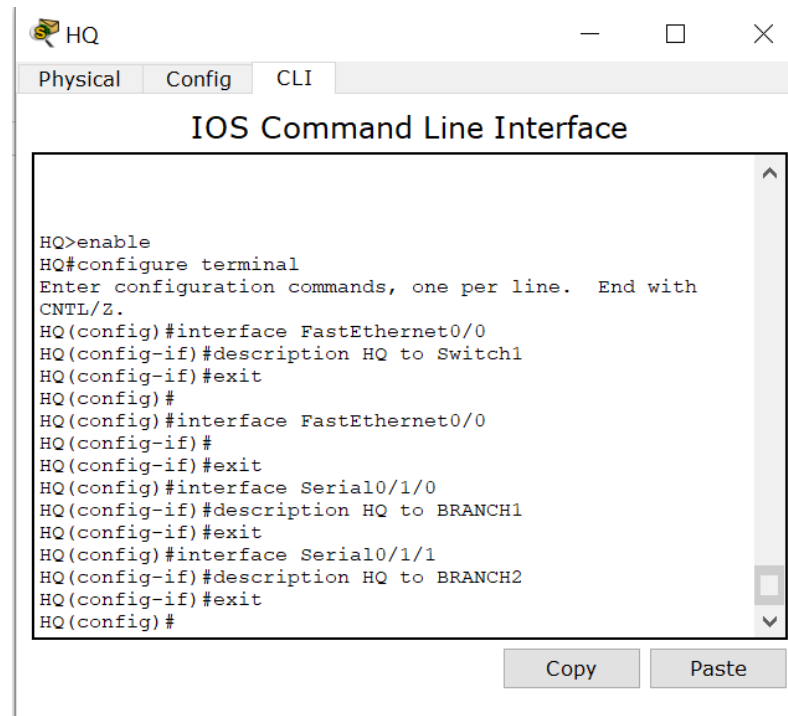

2. Командой enable secret \*password\* устанавливаем пароль на привилегированный режим.

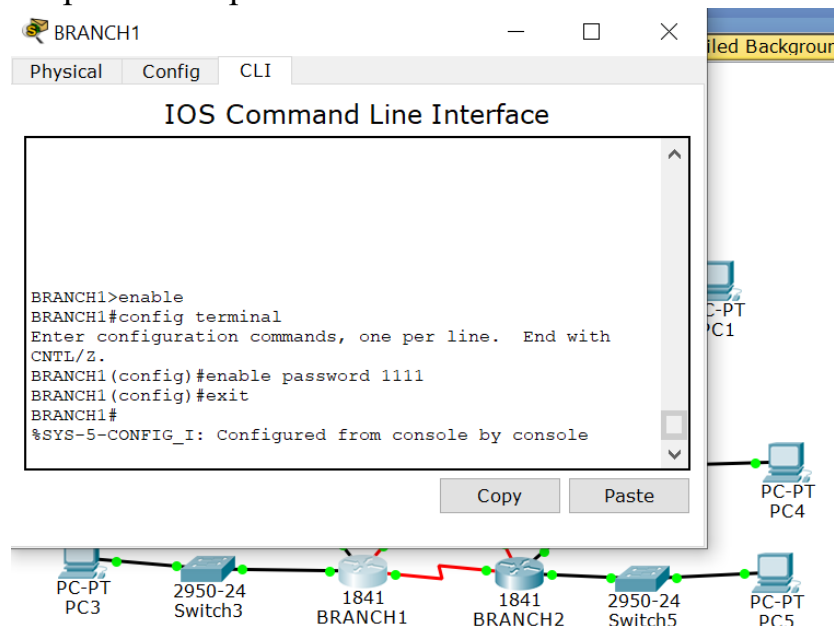


3. Назначим баннеры через banner motd.

```
BRANCH1#config terminal
Enter configuration commands, one per line. End with
CNTL/Z.
BRANCH1(config)#banner motd # BRANCH1 #
BRANCH1(config)#exit
BRANCH1#
%SYS-5-CONFIG_I: Configured from console by console
```


4. Переименуем устройства через hostname \*name\*.

```
Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with
CNTL/Z.
Switch(config)#hostname Switch1
Switch1(config)#exit
Switch1#
%SYS-5-CONFIG_I: Configured from console by console
```

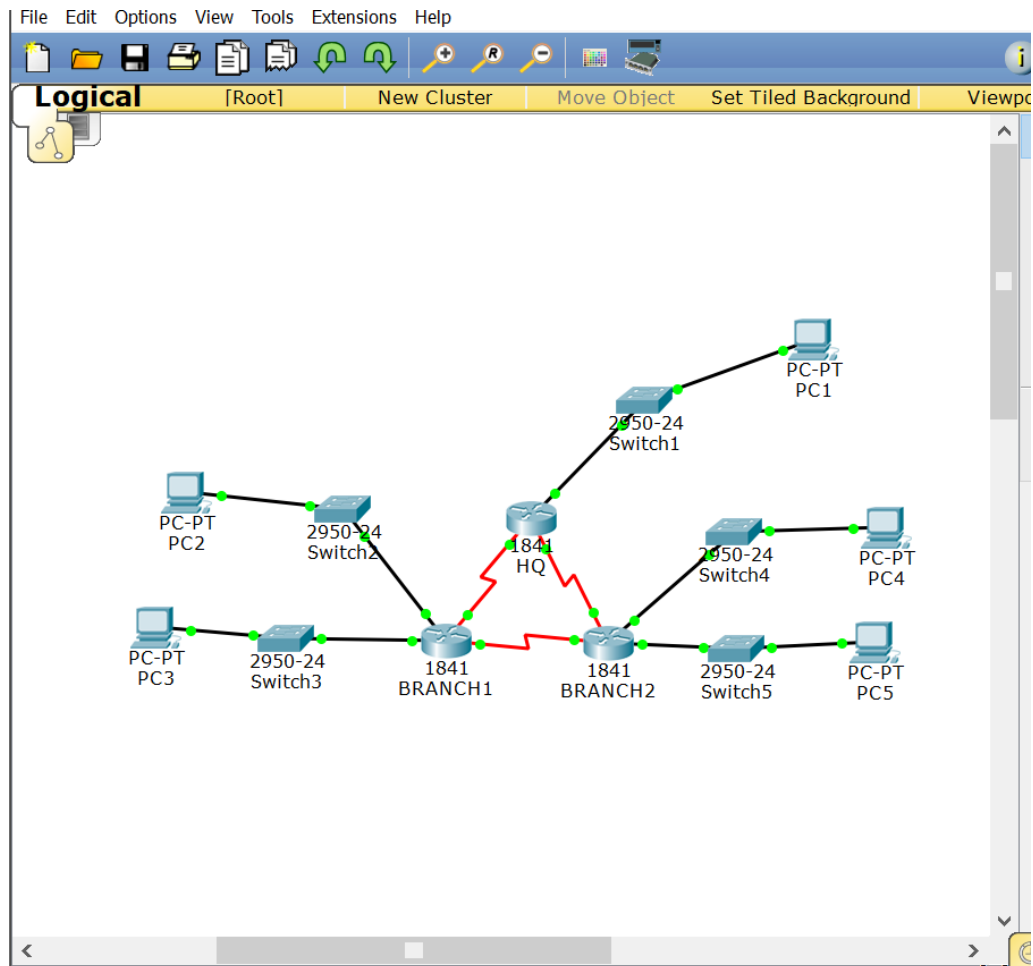

## Part 2.

1. Сконфигурируем узлы сети. Проверить достижимость узлов в своих подсетях командой ping \*ip\*.

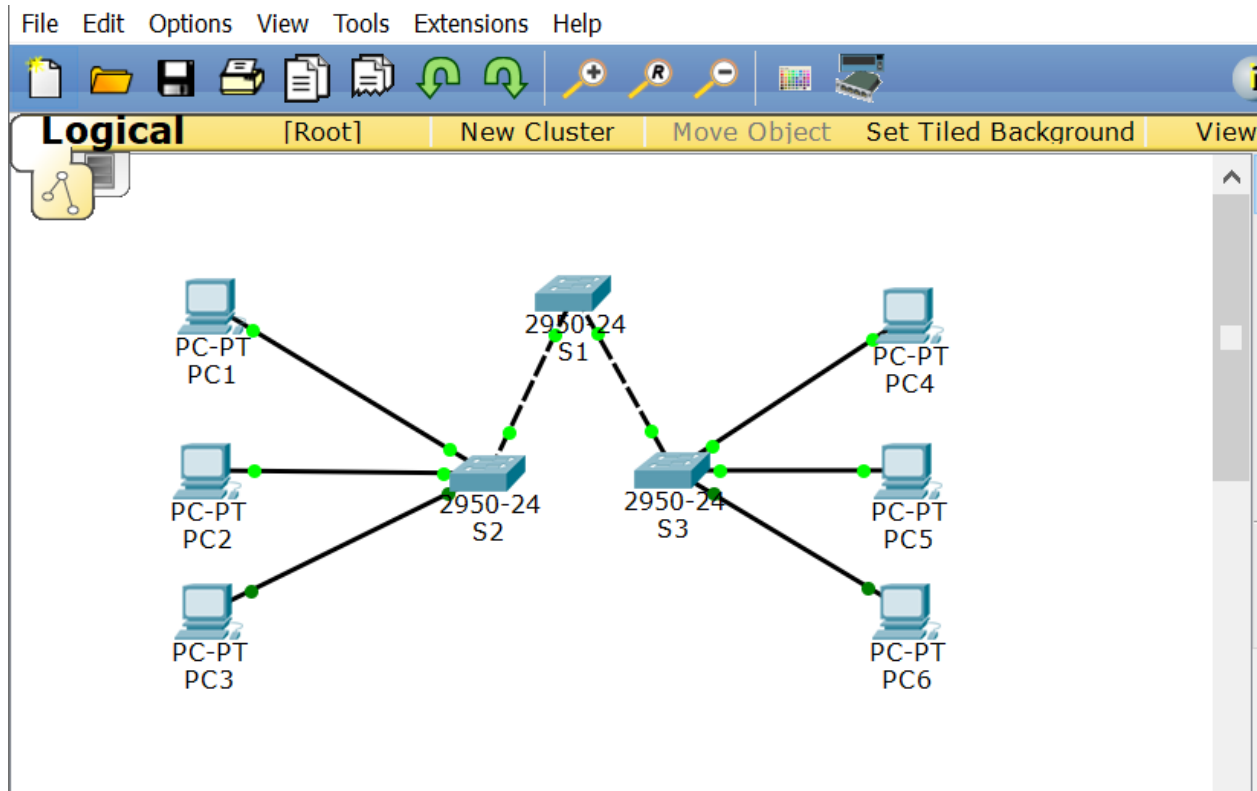

Logical [Root] New Cluster Move Object Set Tiled Background View

PC1

Physical Config Desktop Custom Interface

### IP Configuration

IP Configuration

☐ DHCP ☒ Static

IP Address

Subnet Mask

Default Gateway

DNS Server

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static


IPv6 Address

Link Local Address

IPv6 Gateway

IPv6 DNS Server

Dialer Editor Firewall

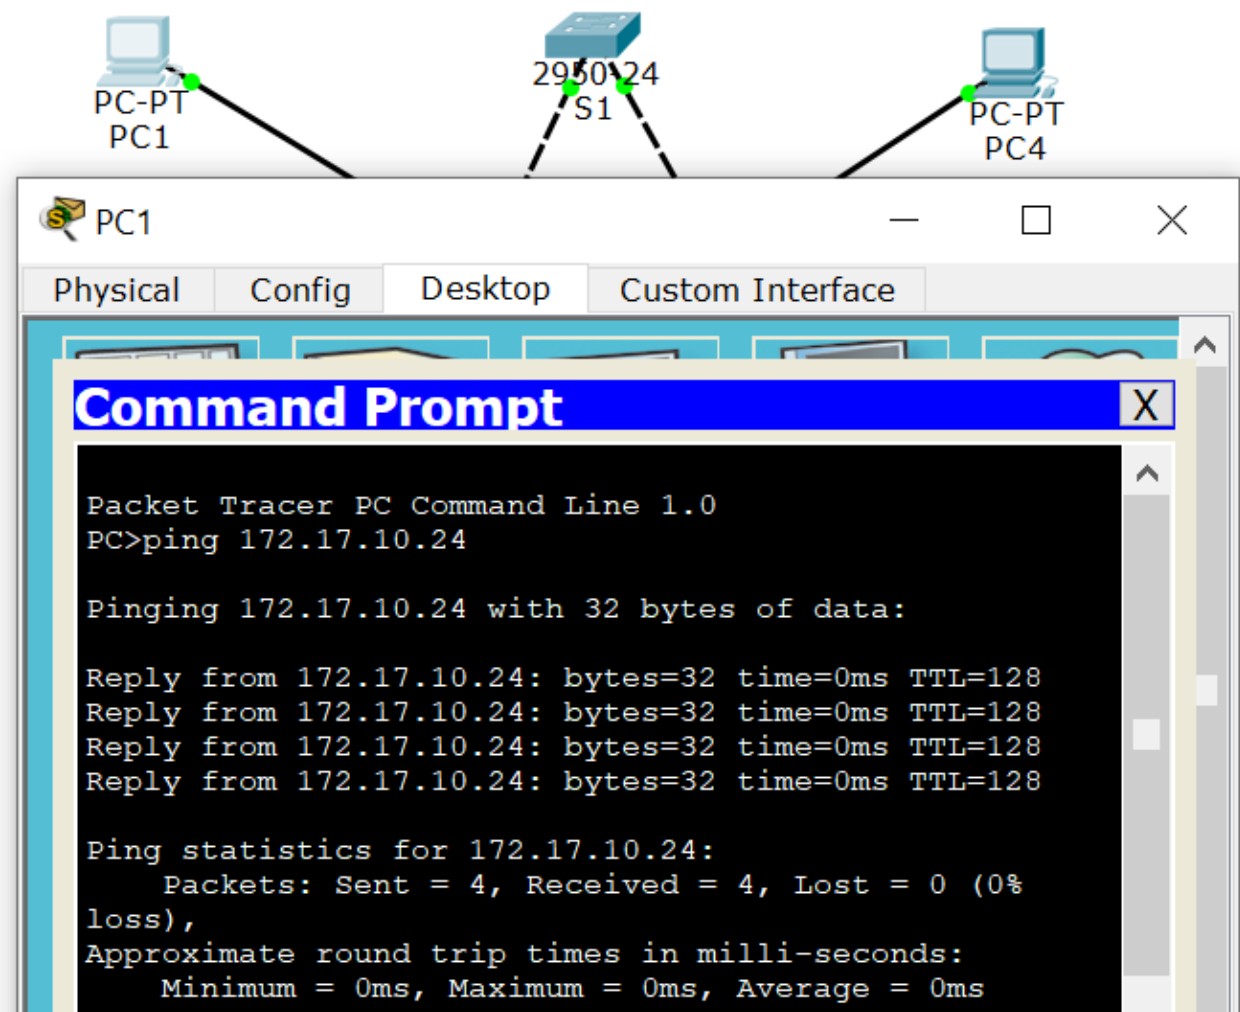

2. Командой `vlan *id*` создадим vlan с идентификатором `id`.  
Командой `name *name*` назначим уникальное `vlan name`.

```
S1(config)#vlan 10
S1(config-vlan)#name Faculty/Staff
S1(config-vlan)#vlan 20
S1(config-vlan)#name Students
S1(config-vlan)#vlan 30
S1(config-vlan)#name Guest(Default)
S1(config-vlan)#vlan 99
S1(config-vlan)#name Management&Native
S1(config-vlan)#end
S1#
%SYS-5-CONFIG_I: Configured from console by console
```

3. Аналогично пункту выше, но для коммутаторов S2 и S3.

```
S2#config terminal
Enter configuration commands, one per line.  End with
CNTL/Z.
S2(config)#vlan 10
S2(config-vlan)#name Faculty/Staff
S2(config-vlan)#vlan 20
S2(config-vlan)#name Students
S2(config-vlan)#vlan 30
S2(config-vlan)#name Guest(Default)
S2(config-vlan)#vlan 99
S2(config-vlan)#name Management&Native
S2(config-vlan)#end
S2#
%SYS-5-CONFIG_I: Configured from console by console
CNTL/Z.
S3(config)#vlan 10
S3(config-vlan)#name Faculty/Staff
S3(config-vlan)#vlan 20
S3(config-vlan)#name Students
S3(config-vlan)#vlan 30
S3(config-vlan)#name Guest(Default)
S3(config-vlan)#vlan 99
S3(config-vlan)#name Management&Native
S3(config-vlan)#end
S3#
%SYS-5-CONFIG_I: Configured from console by console
```

4. Выведем информацию по каждой vlan командой show vlan brief.

```
S1#show vlan brief
```

VLAN	Name	Status	Ports
1	default	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5, Fa0/6, Fa0/7, Fa0/8 Fa0/9, Fa0/10, Fa0/11, Fa0/12 Fa0/13, Fa0/14, Fa0/15, Fa0/16 Fa0/17, Fa0/18, Fa0/19, Fa0/20 Fa0/21, Fa0/22, Fa0/23, Fa0/24
10	Faculty/Staff	active	
20	Students	active	
30	Guest(Default)	active	
99	Management&Native	active	
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

```
S1#
```

```
S2#show vlan brief
```

VLAN	Name	Status	Ports
1	default	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5, Fa0/6, Fa0/7, Fa0/8 Fa0/9, Fa0/10, Fa0/11, Fa0/12 Fa0/13, Fa0/14, Fa0/15, Fa0/16 Fa0/17, Fa0/18, Fa0/19, Fa0/20 Fa0/21, Fa0/22, Fa0/23, Fa0/24
10	Faculty/Staff	active	
20	Students	active	
30	Guest (Default)	active	
99	Management&Native	active	
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

```
S2#
```

```
S3#show vlan brief
```

VLAN	Name	Status	Ports
1	default	active	Fa0/1, Fa0/2, Fa0/3, Fa0/4 Fa0/5, Fa0/6, Fa0/7, Fa0/8 Fa0/9, Fa0/10, Fa0/11, Fa0/12 Fa0/13, Fa0/14, Fa0/15, Fa0/16 Fa0/17, Fa0/18, Fa0/19, Fa0/20 Fa0/21, Fa0/22, Fa0/23, Fa0/24
10	Faculty/Staff	active	
20	Students	active	
30	Guest (Default)	active	
99	Management&Native	active	
1002	fddi-default	active	
1003	token-ring-default	active	
1004	fddinet-default	active	
1005	trnet-default	active	

```
S3#
```


5. Перейдем в конфигурацию порта Fa 0/6 с помощью команды interface FastEthernet 0/6. Далее переведем порт в access режим через switchport mode access. Определим связь с портом vlan 30 командой aswitchport access vlan 30.

```
S2(config)#interface fastEthernet 0/6
S2(config-if)#switchport mode access
S2(config-if)#switchport access vlan 30
S2(config-if)#interface fastEthernet 0/11
S2(config-if)#switchport mode access
S2(config-if)#switchport access vlan 10
S2(config-if)#interface fastEthernet 0/18
S2(config-if)#switchport mode access
S2(config-if)#switchport access vlan 20

S3(config)#interface fastEthernet 0/6
S3(config-if)#switchport mode access
S3(config-if)#switchport access vlan 30
S3(config-if)#interface fastEthernet 0/11
S3(config-if)#switchport mode access
S3(config-if)#switchport access vlan 10
S3(config-if)#interface fastEthernet 0/18
S3(config-if)#switchport mode access
S3(config-if)#switchport access vlan 20
S3(config-if)#end
```

6. Проверим связность в подсети через ping.

Из-за подключения подсетей к разным коммутаторам при связи с одинаковыми идентификаторами vlan, и из-за отсутствия trunk конфигурации портов наблюдаем потерю связности в подсетях.

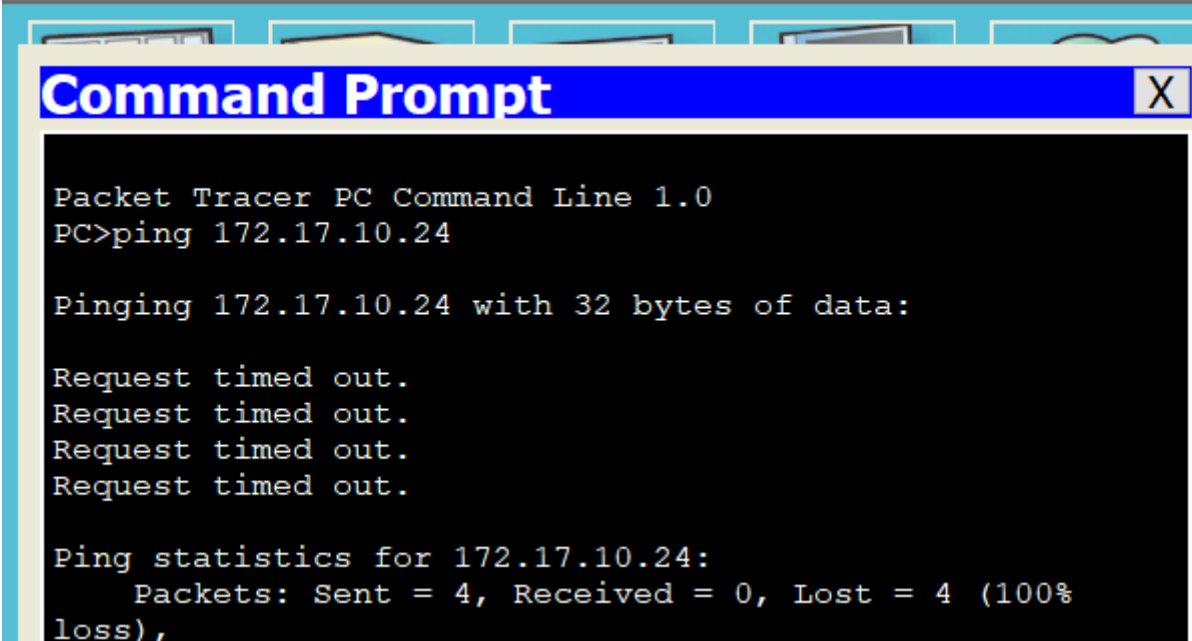

```
Command Prompt
Packet Tracer PC Command Line 1.0
PC>ping 172.17.10.24

Pinging 172.17.10.24 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 172.17.10.24:
    Packets: Sent = 4, Received = 0, Lost = 4 (100%
loss),
```

7. Командой switchport mode trunk переведем порт в режим trunk, командой switchport trunk native vlan 99 сконфигурируем передачу пришедшего нетегированного трафика на vlan 99.

```
S1>enable
S1#config terminal
Enter configuration commands, one per line. End with
CNTL/Z.
S1(config)#interface FastEthernet 0/1
S1(config-if)#switchport mode trunk
S1(config-if)#switchport trunk native vlan 99
S1(config-if)#interface FastEthernet 0/3
S1(config-if)#switchport mode trunk
S1(config-if)#switchport trunk native vlan 99
S1(config-if)#end
```



```

S2#config terminal
Enter configuration commands, one per line.  End with
CNTL/Z.
S2(config)#interface FastEthernet 0/1
S2(config-if)#switchport mode trunk
S2(config-if)#switchport trunk native vlan 99
S2(config-if)#end
S2#

S3(config)#interface FastEthernet 0/3
S3(config-if)#switchport mode trunk
S3(config-if)#switchport trunk native vlan 99
S3(config-if)#switchport trunk native vlan 99
^
% Invalid input detected at '^' marker.

S3(config-if)#switchport trunk native vlan 99
S3(config-if)#end
S3#
%SYS-5-CONFIG_I: Configured from console by console

```

## 8. Получим информацию о подсетях командой show vlan.

```

S1#show vlan

```

VLAN	Name	Status	Ports
1	default	active	Fa0/2, Fa0/4, Fa0/5, Fa0/7 Fa0/8, Fa0/9, Fa0/10, Fa0/12 Fa0/13, Fa0/14, Fa0/15, Fa0/16 Fa0/17, Fa0/19, Fa0/20, Fa0/21 Fa0/22, Fa0/23, Fa0/24
10	Faculty/Staff	active	Fa0/11
20	Students	active	Fa0/18
30	Guest(Default)	active	Fa0/6
99	Management&Native	active	
1002	fddi-default	act/unsup	
1003	token-ring-default	act/unsup	
1004	fddinet-default	act/unsup	
1005	trnet-default	act/unsup	

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
10	enet	100010	1500	-	-	-	-	-	0	0
20	enet	100020	1500	-	-	-	-	-	0	0
30	enet	100030	1500	-	-	-	-	-	0	0
99	enet	100099	1500	-	-	-	-	-	0	0
1002	fddi	101002	1500	-	-	-	-	-	0	0
1003	tr	101003	1500	-	-	-	-	-	0	0
1004	fdnet	101004	1500	-	-	-	ieee	-	0	0
1005	trnet	101005	1500	-	-	-	ibm	-	0	0

```

Remote SPAN VLANs
-----

Primary Secondary Type          Ports
-----
S1#

```



S2#show vlan

VLAN	Name	Status	Ports
1	default	active	Fa0/2, Fa0/3, Fa0/4, Fa0/5 Fa0/7, Fa0/8, Fa0/9, Fa0/10 Fa0/12, Fa0/13, Fa0/14, Fa0/15 Fa0/16, Fa0/17, Fa0/19, Fa0/20 Fa0/21, Fa0/22, Fa0/23, Fa0/24
10	Faculty/Staff	active	Fa0/11
20	Students	active	Fa0/18
30	Guest (Default)	active	Fa0/6
99	Management&Native	active	
1002	fddi-default	act/unsup	
1003	token-ring-default	act/unsup	
1004	fddinet-default	act/unsup	
1005	trnet-default	act/unsup	

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
10	enet	100010	1500	-	-	-	-	-	0	0
20	enet	100020	1500	-	-	-	-	-	0	0
30	enet	100030	1500	-	-	-	-	-	0	0
99	enet	100099	1500	-	-	-	-	-	0	0
1002	fddi	101002	1500	-	-	-	-	-	0	0
1003	tr	101003	1500	-	-	-	-	-	0	0
1004	fdnet	101004	1500	-	-	-	ieee	-	0	0
1005	trnet	101005	1500	-	-	-	ibm	-	0	0

Remote SPAN VLANs

Primary	Secondary	Type	Ports
---------	-----------	------	-------

S2#|

S3#show vlan

VLAN	Name	Status	Ports
1	default	active	Fa0/1, Fa0/2, Fa0/4, Fa0/5 Fa0/7, Fa0/8, Fa0/9, Fa0/10 Fa0/12, Fa0/13, Fa0/14, Fa0/15 Fa0/16, Fa0/17, Fa0/19, Fa0/20 Fa0/21, Fa0/22, Fa0/23, Fa0/24
10	Faculty/Staff	active	Fa0/11
20	Students	active	Fa0/18
30	Guest(Default)	active	Fa0/6
99	Management&Native	active	
1002	fddi-default	act/unsup	
1003	token-ring-default	act/unsup	
1004	fddinet-default	act/unsup	
1005	trnet-default	act/unsup	

VLAN	Type	SAID	MTU	Parent	RingNo	BridgeNo	Stp	BrdgMode	Trans1	Trans2
1	enet	100001	1500	-	-	-	-	-	0	0
10	enet	100010	1500	-	-	-	-	-	0	0
20	enet	100020	1500	-	-	-	-	-	0	0
30	enet	100030	1500	-	-	-	-	-	0	0
99	enet	100099	1500	-	-	-	-	-	0	0
1002	fddi	101002	1500	-	-	-	-	-	0	0
1003	tr	101003	1500	-	-	-	-	-	0	0
1004	fdnet	101004	1500	-	-	-	ieee	-	0	0
1005	trnet	101005	1500	-	-	-	ibm	-	0	0

Remote SPAN VLANs

Primary Secondary Type Ports

S3#|

Получим описание интерфейсов show interfaces.

```
S1#show interfaces
FastEthernet0/1 is up, line protocol is up (connected)
  Hardware is Lance, address is 00d0.9779.2001 (bia 00d0.9779.2001)
  BW 1000000 Kbit, DLY 1000 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation ARPA, loopback not set
  Keepalive set (10 sec)
  Full-duplex, 100Mb/s
  input flow-control is off, output flow-control is off
  ARP type: ARPA, ARP Timeout 04:00:00
  Last input 00:00:08, output 00:00:05, output hang never
  Last clearing of "show interface" counters never
  Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
  Queueing strategy: fifo
  Output queue :0/40 (size/max)
  5 minute input rate 0 bits/sec, 0 packets/sec
  5 minute output rate 0 bits/sec, 0 packets/sec
    956 packets input, 193351 bytes, 0 no buffer
    Received 956 broadcasts, 0 runts, 0 giants, 0 throttles
    0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
    0 watchdog, 0 multicast, 0 pause input
    0 input packets with dribble condition detected
    2357 packets output, 263570 bytes, 0 underruns
    0 output errors, 0 collisions, 10 interface resets
    0 babbles, 0 late collision, 0 deferred
    0 lost carrier, 0 no carrier
    0 output buffer failures, 0 output buffers swapped out
FastEthernet0/2 is down, line protocol is down (disabled)
  Hardware is Lance, address is 00d0.9779.2002 (bia 00d0.9779.2002)
  BW 1000000 Kbit, DLY 1000 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation ARPA, loopback not set
  Keepalive set (10 sec)
  Half-duplex, 100Mb/s
  input flow-control is off, output flow-control is off
  ARP type: ARPA, ARP Timeout 04:00:00
  Last input 00:00:08, output 00:00:05, output hang never
  Last clearing of "show interface" counters never
  Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
  Queueing strategy: fifo
  Output queue :0/40 (size/max)
  5 minute input rate 0 bits/sec, 0 packets/sec
  5 minute output rate 0 bits/sec, 0 packets/sec
    956 packets input, 193351 bytes, 0 no buffer
    Received 956 broadcasts, 0 runts, 0 giants, 0 throttles
    0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
    0 watchdog, 0 multicast, 0 pause input
```

```
S2#show interfaces
FastEthernet0/1 is up, line protocol is up (connected)
  Hardware is Lance, address is 00d0.9719.6e01 (bia 00d0.9719.6e01)
  BW 100000 Kbit, DLY 1000 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation ARPA, loopback not set
  Keepalive set (10 sec)
  Full-duplex, 100Mb/s
  input flow-control is off, output flow-control is off
  ARP type: ARPA, ARP Timeout 04:00:00
  Last input 00:00:08, output 00:00:05, output hang never
  Last clearing of "show interface" counters never
  Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
  Queueing strategy: fifo
  Output queue :0/40 (size/max)
  5 minute input rate 0 bits/sec, 0 packets/sec
  5 minute output rate 0 bits/sec, 0 packets/sec
    956 packets input, 193351 bytes, 0 no buffer
    Received 956 broadcasts, 0 runts, 0 giants, 0 throttles
    0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
    0 watchdog, 0 multicast, 0 pause input
    0 input packets with dribble condition detected
    2357 packets output, 263570 bytes, 0 underruns
    0 output errors, 0 collisions, 10 interface resets
    0 babbles, 0 late collision, 0 deferred
    0 lost carrier, 0 no carrier
    0 output buffer failures, 0 output buffers swapped out
FastEthernet0/2 is down, line protocol is down (disabled)
  Hardware is Lance, address is 00d0.9719.6e02 (bia 00d0.9719.6e02)
  BW 100000 Kbit, DLY 1000 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation ARPA, loopback not set
  Keepalive set (10 sec)
  Half-duplex, 100Mb/s
  input flow-control is off, output flow-control is off
  ARP type: ARPA, ARP Timeout 04:00:00
  Last input 00:00:08, output 00:00:05, output hang never
  Last clearing of "show interface" counters never
  Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
  Queueing strategy: fifo
  Output queue :0/40 (size/max)
  5 minute input rate 0 bits/sec, 0 packets/sec
  5 minute output rate 0 bits/sec, 0 packets/sec
    956 packets input, 193351 bytes, 0 no buffer
    Received 956 broadcasts, 0 runts, 0 giants, 0 throttles
    0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
--More--
```

```
S3#show interfaces
FastEthernet0/1 is down, line protocol is down (disabled)
  Hardware is Lance, address is 00d0.ba97.b701 (bia 00d0.ba97.b701)
  BW 100000 Kbit, DLY 1000 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation ARPA, loopback not set
  Keepalive set (10 sec)
  Full-duplex, 100Mb/s
  input flow-control is off, output flow-control is off
  ARP type: ARPA, ARP Timeout 04:00:00
  Last input 00:00:08, output 00:00:05, output hang never
  Last clearing of "show interface" counters never
  Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
  Queueing strategy: fifo
  Output queue :0/40 (size/max)
  5 minute input rate 0 bits/sec, 0 packets/sec
  5 minute output rate 0 bits/sec, 0 packets/sec
    956 packets input, 193351 bytes, 0 no buffer
    Received 956 broadcasts, 0 runts, 0 giants, 0 throttles
    0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
    0 watchdog, 0 multicast, 0 pause input
    0 input packets with dribble condition detected
    2357 packets output, 263570 bytes, 0 underruns
    0 output errors, 0 collisions, 10 interface resets
    0 babbles, 0 late collision, 0 deferred
    0 lost carrier, 0 no carrier
    0 output buffer failures, 0 output buffers swapped out
FastEthernet0/2 is down, line protocol is down (disabled)
  Hardware is Lance, address is 00d0.ba97.b702 (bia 00d0.ba97.b702)
  BW 100000 Kbit, DLY 1000 usec,
    reliability 255/255, txload 1/255, rxload 1/255
  Encapsulation ARPA, loopback not set
  Keepalive set (10 sec)
  Half-duplex, 100Mb/s
  input flow-control is off, output flow-control is off
  ARP type: ARPA, ARP Timeout 04:00:00
  Last input 00:00:08, output 00:00:05, output hang never
  Last clearing of "show interface" counters never
  Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
  Queueing strategy: fifo
  Output queue :0/40 (size/max)
  5 minute input rate 0 bits/sec, 0 packets/sec
  5 minute output rate 0 bits/sec, 0 packets/sec
    956 packets input, 193351 bytes, 0 no buffer
    Received 956 broadcasts, 0 runts, 0 giants, 0 throttles
    0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
    0 watchdog, 0 multicast, 0 pause input
```