TWELVE FITTED ON–MOTHERBOARD MOTOR INTERFACES: 24 DIFFERENTIAL SIGNALS / 12 NO+NC ENABLES / 12 SEPARATE ALARMS
Source circuit candidate. Power/interface boundaries and qualified timing remain explicit parent obligations. Not fabrication data.

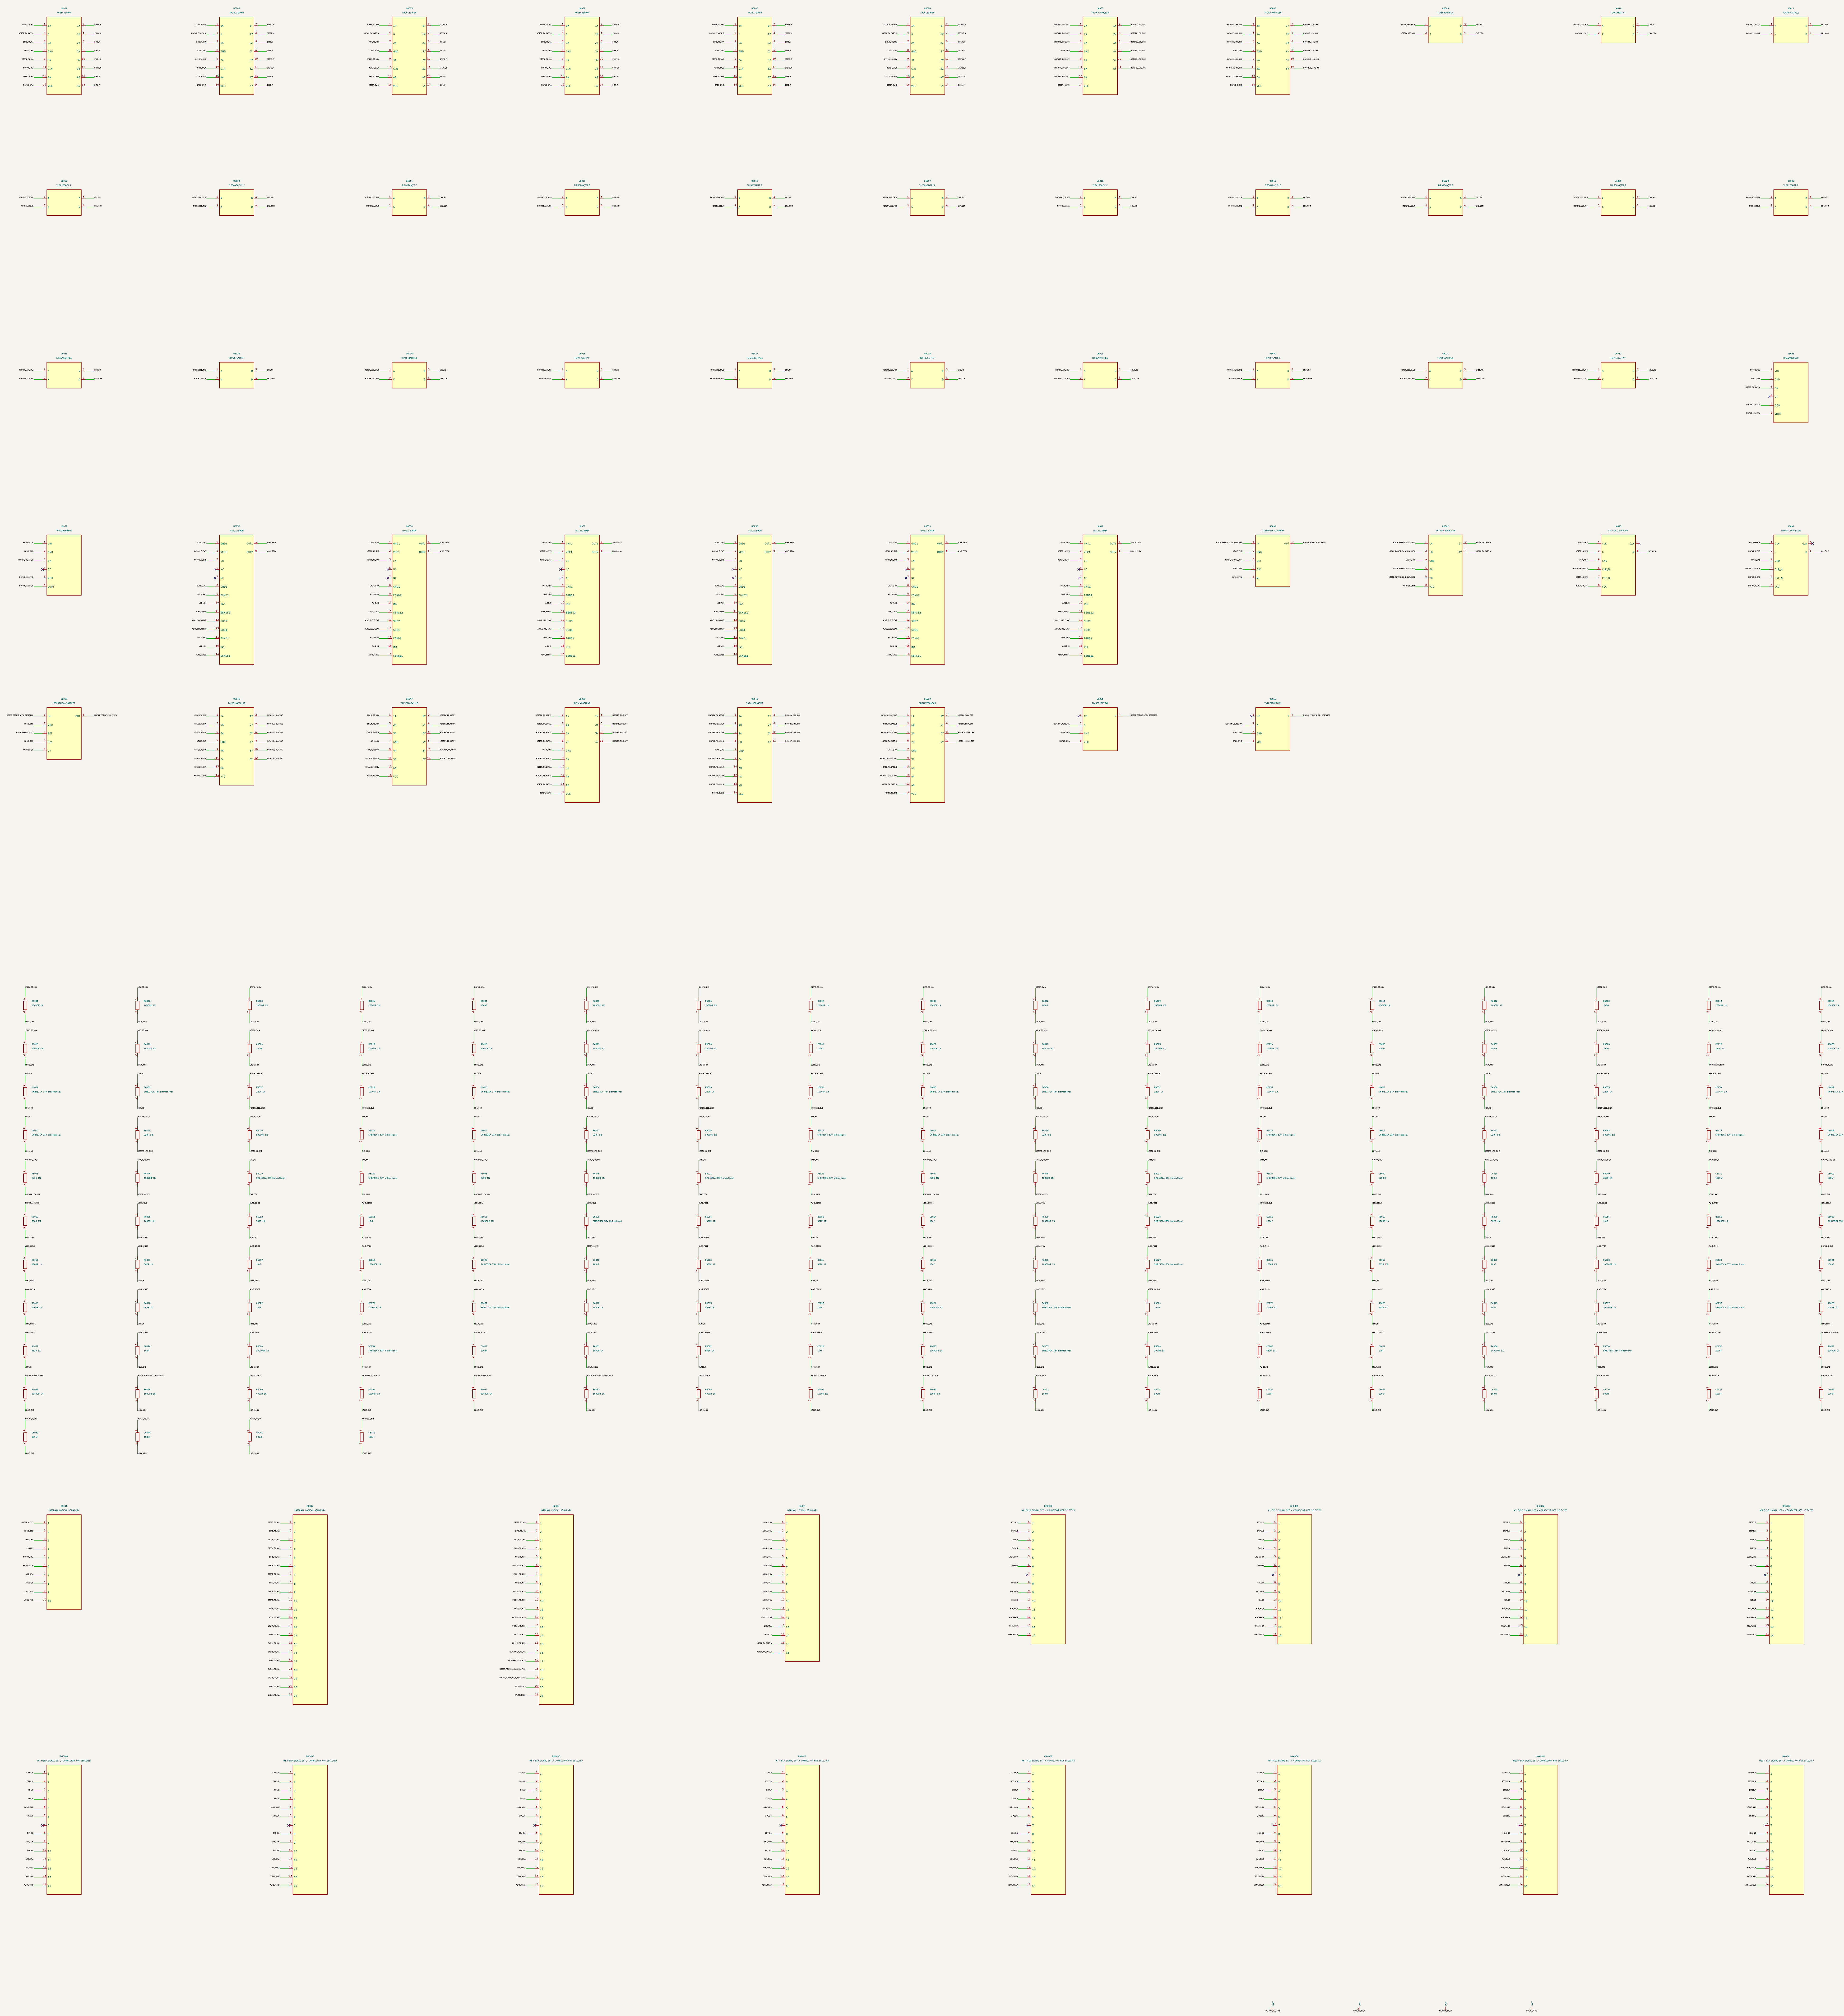

Sheet: /
File: motherboard_motors.kicad_sch

Title: One–motherboard twelve motor interface source

Size: User	Date: 2026–09–30	**Rev: r0.2**
KiCad E.D.A. 10.0.4		Id: 1/1