
OCTOPUS / EXTERNAL DRIVER ADAPTER

r0.1 ENGINEERING CANDIDATE — NOT RELEASED FOR ORDER

Provisional profile: Octopus Pro V1.0 F429/F446, 5 V buffered socket signals; CL57T V4.1 in 5 V mode.

Actual equipment identity, power limits, enable behavior and physical fit remain unverified.

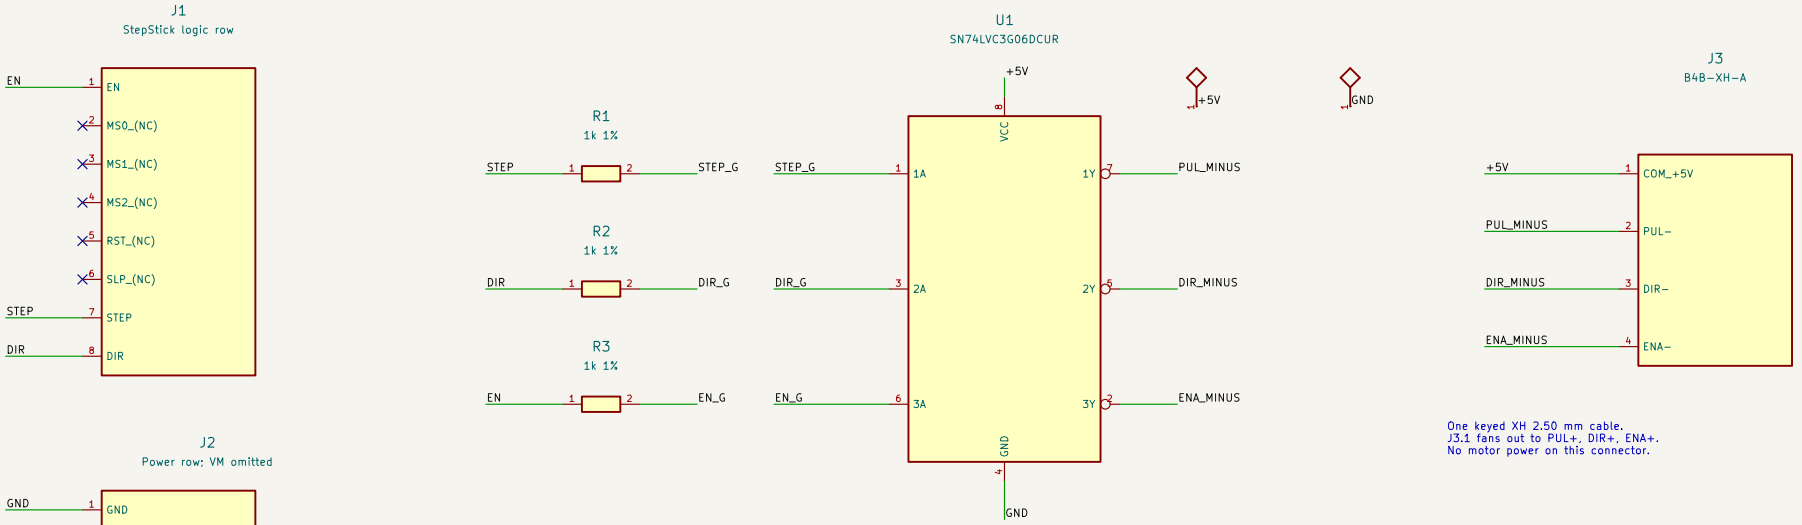

CANDIDATE CONNECTION CONTRACT

J1/J2: male pins on underside; numbering describes top-view socket rows. Confirm orientation mechanically.
VM contact physically omitted: J2 begins at host GND below VM. Board uses only 5 V from VCC_IO.
U1: inverting open-drain outputs. Input HIGH sinks the corresponding MINUS terminal; LOW releases it.
5 V input profile only: U1 VIH >= 0.7 x VCC. This candidate does not support unbuffered 3.3 V sources.
Do not apply 24 V to J3. Verify EN disable polarity, startup, loaded edge timing and host 5 V rail before release.
No isolation or hardware safety function. Alarm wiring remains separate. ERC is not physical validation.

Model / fit / bench qualification pending
ENGINEERING — NOT RELEASED

Sheet: /
File: adapter.kicad_sch

Title: Octopus external driver adapter

Size: A4	Date: 2026-10-05	**Rev: r0.1 candidate**
KiCad E.D.A. 10.0.4		Id: 1/1