
(a) Shunt and differential amplifier (gain = 200 kΩ / 10 kΩ = 20)

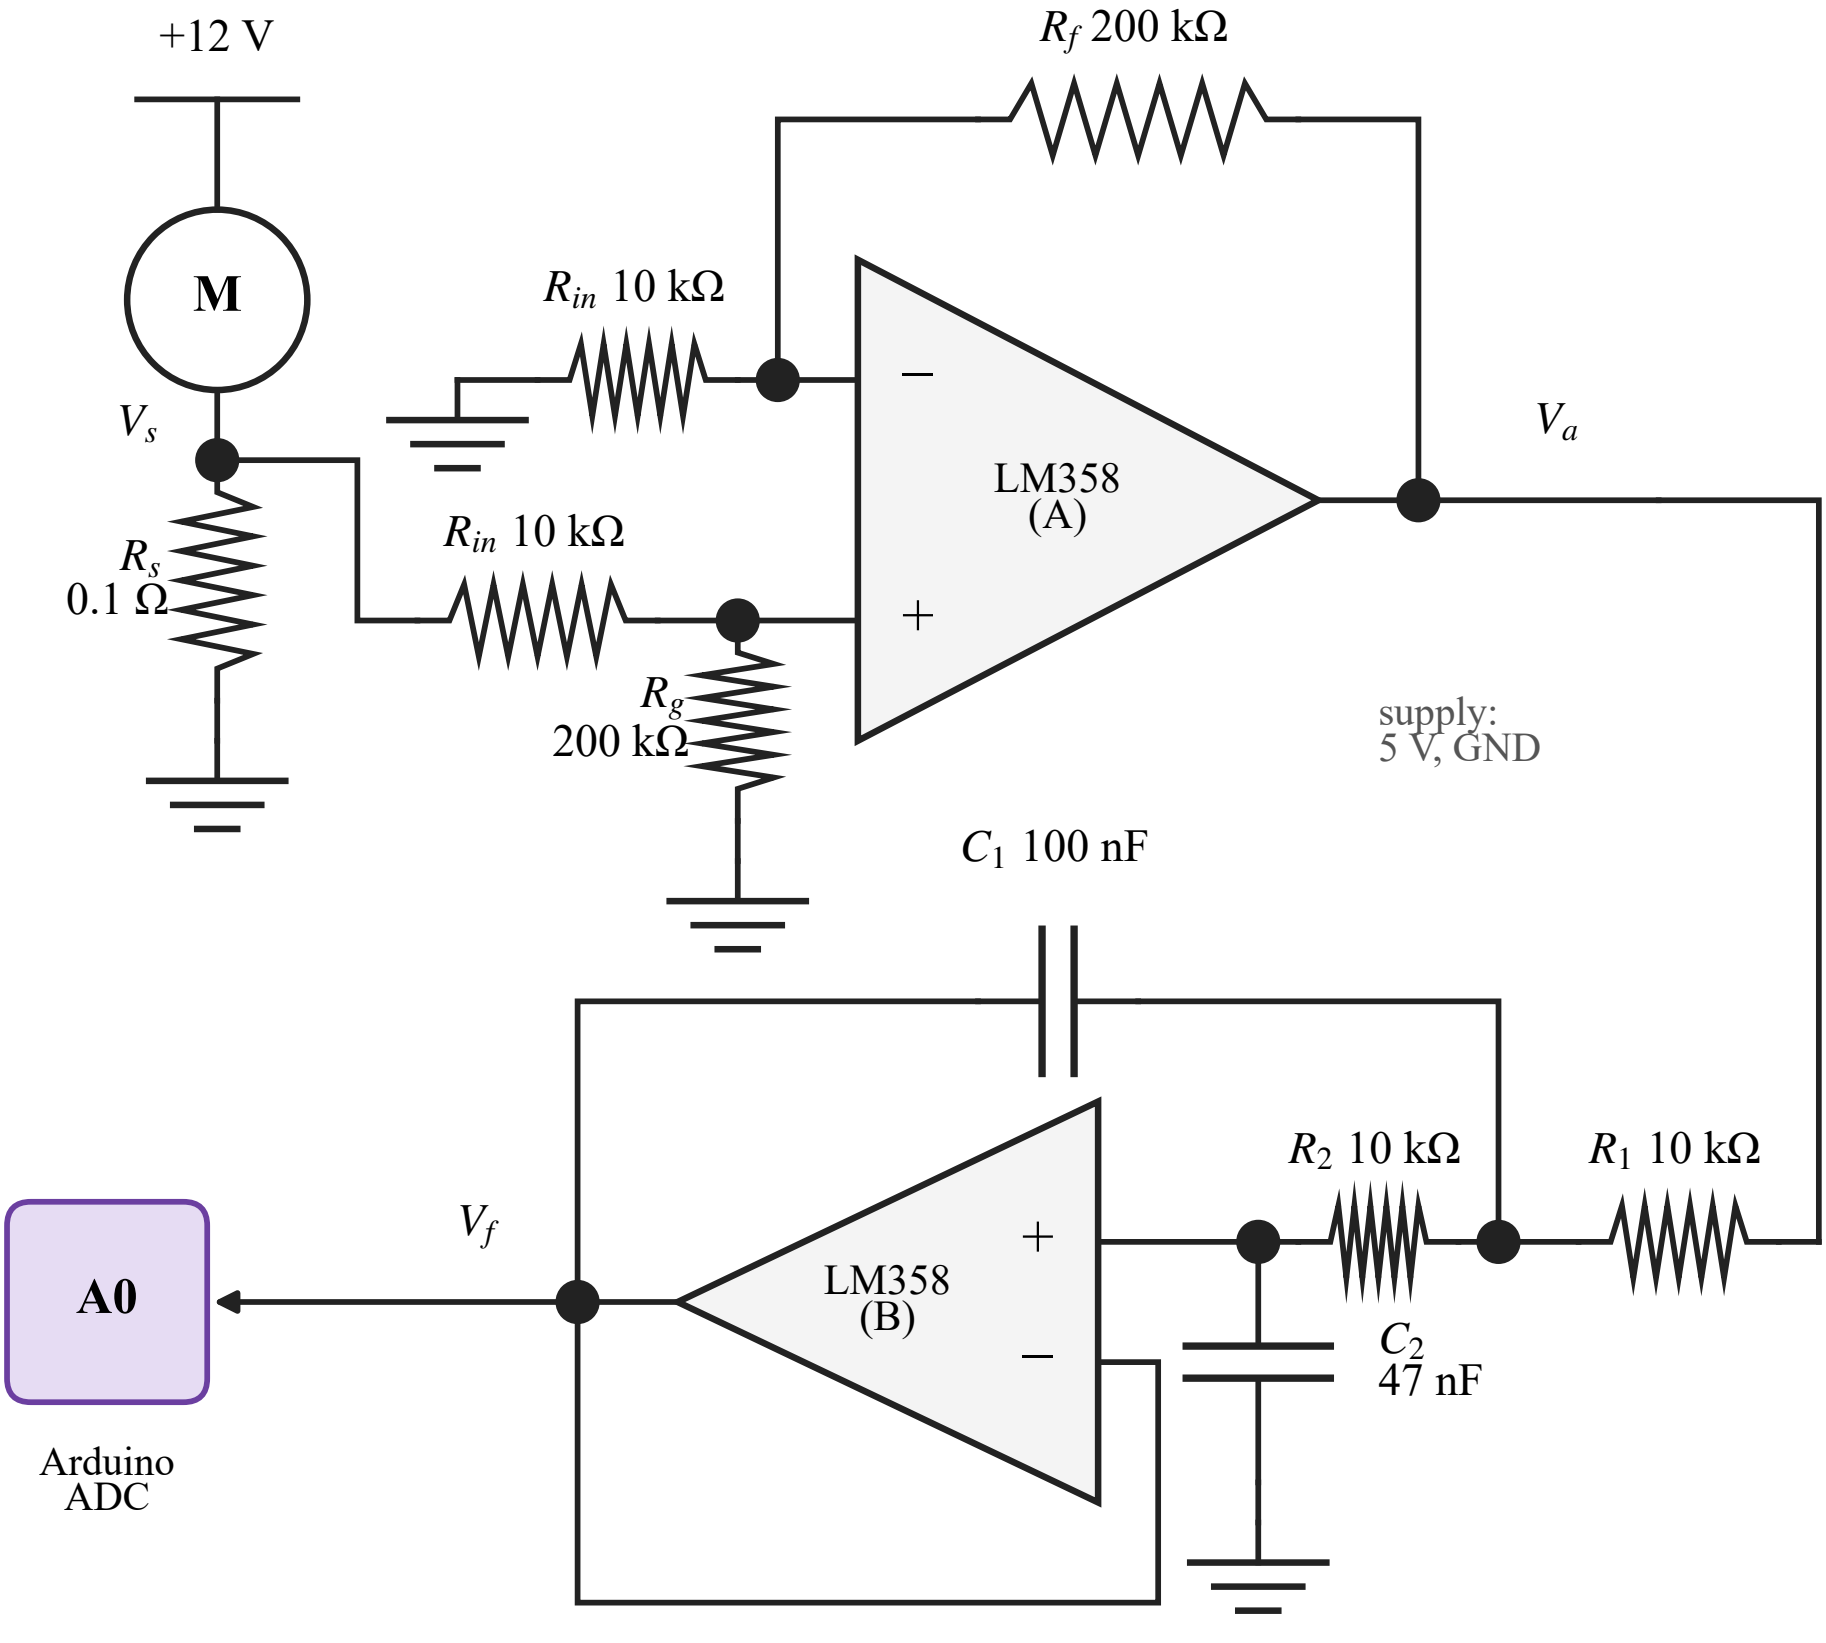

(b) Unity-gain Sallen-Key low-pass filter (f_0 = 232 Hz, Q = 0.73)