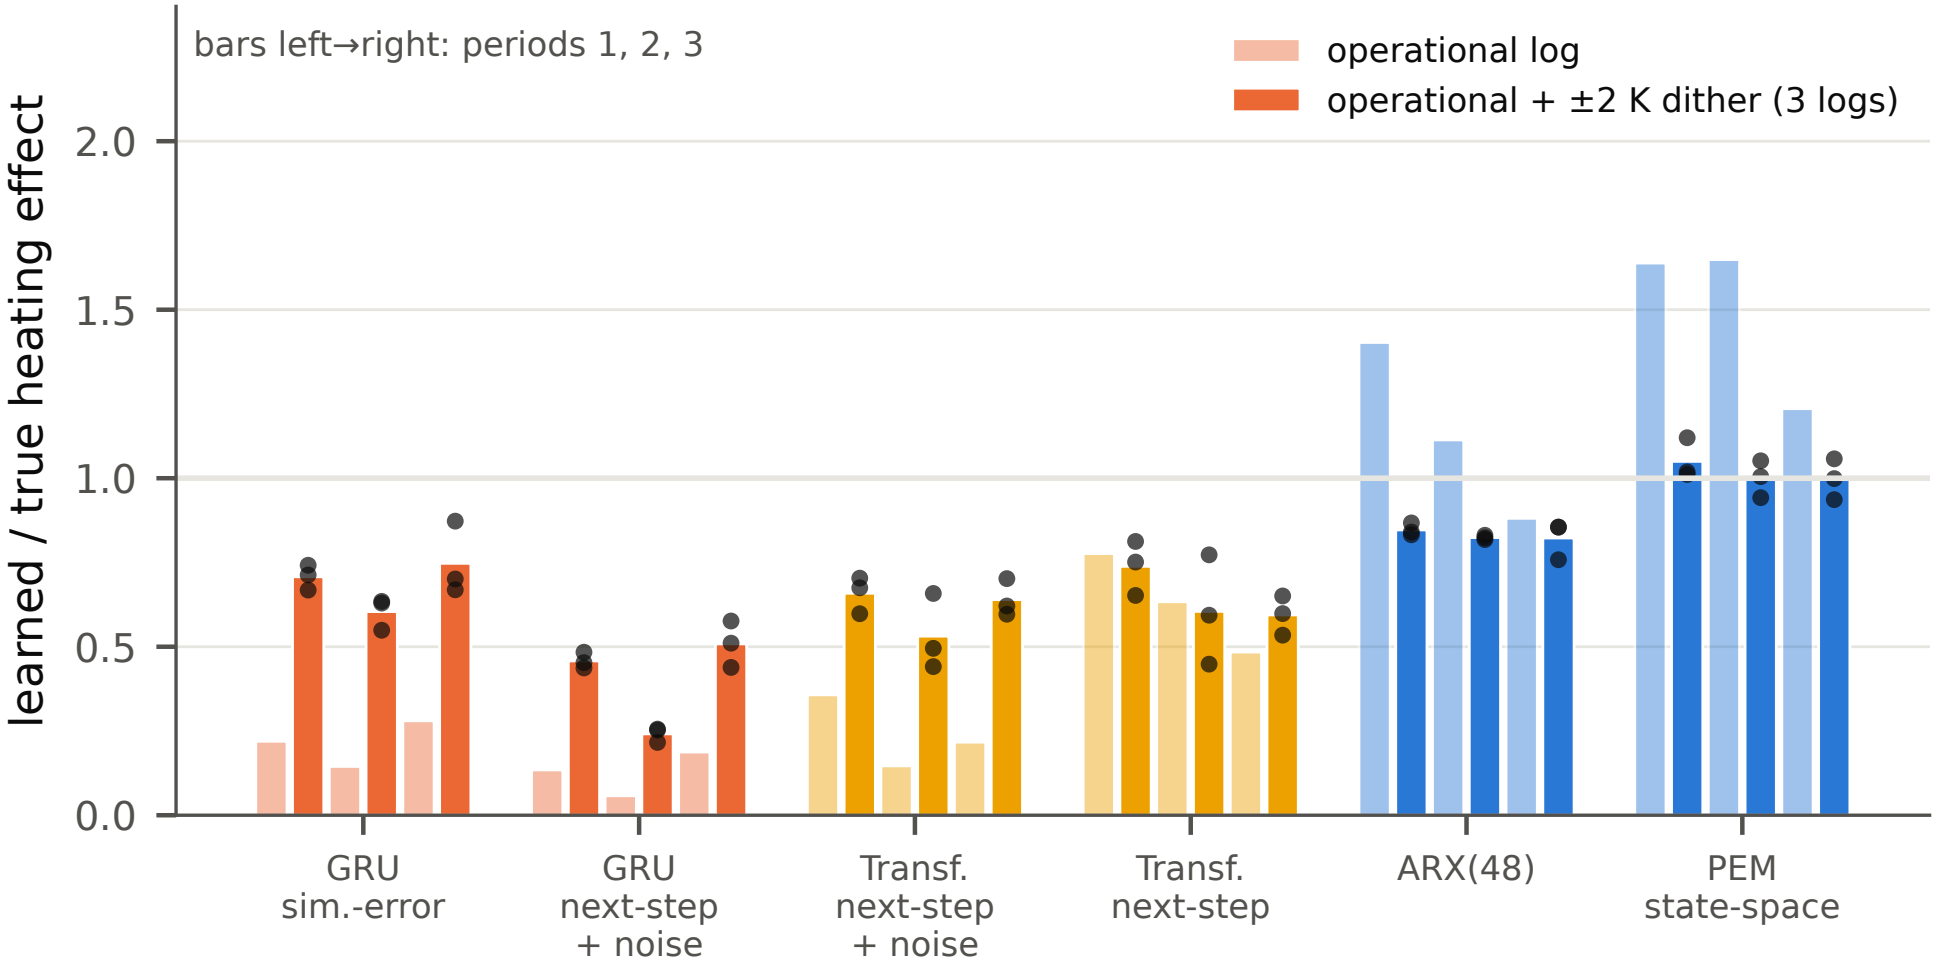
bars left→right: periods 1, 2, 3
operational log
operational + ±2 K dither (3 logs)
learned / true heating effect
2.0
1.5
1.0
0.5
0.0
GRU sim.-error
GRU next-step + noise
Transf. next-step + noise
Transf. next-step
ARX(48)
PEM state-space