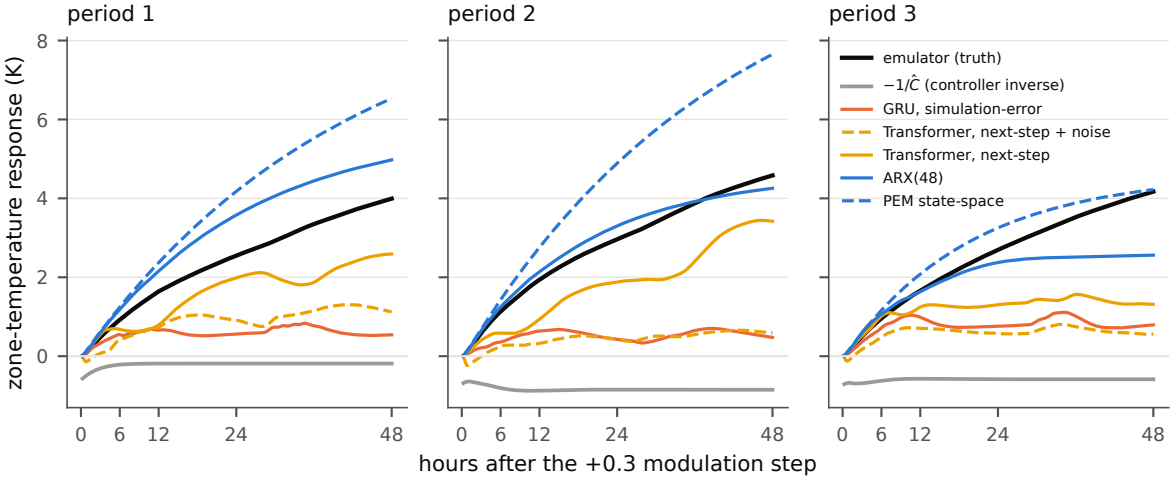
period 1
period 2
period 3
zone-temperature response (K)
8
6
4
2
0
0
6
12
24
48
hours after the +0.3 modulation step
emulator (truth)
$-1/\hat{C}$ (controller inverse)
GRU, simulation-error
Transformer, next-step + noise
Transformer, next-step
ARX(48)
PEM state-space