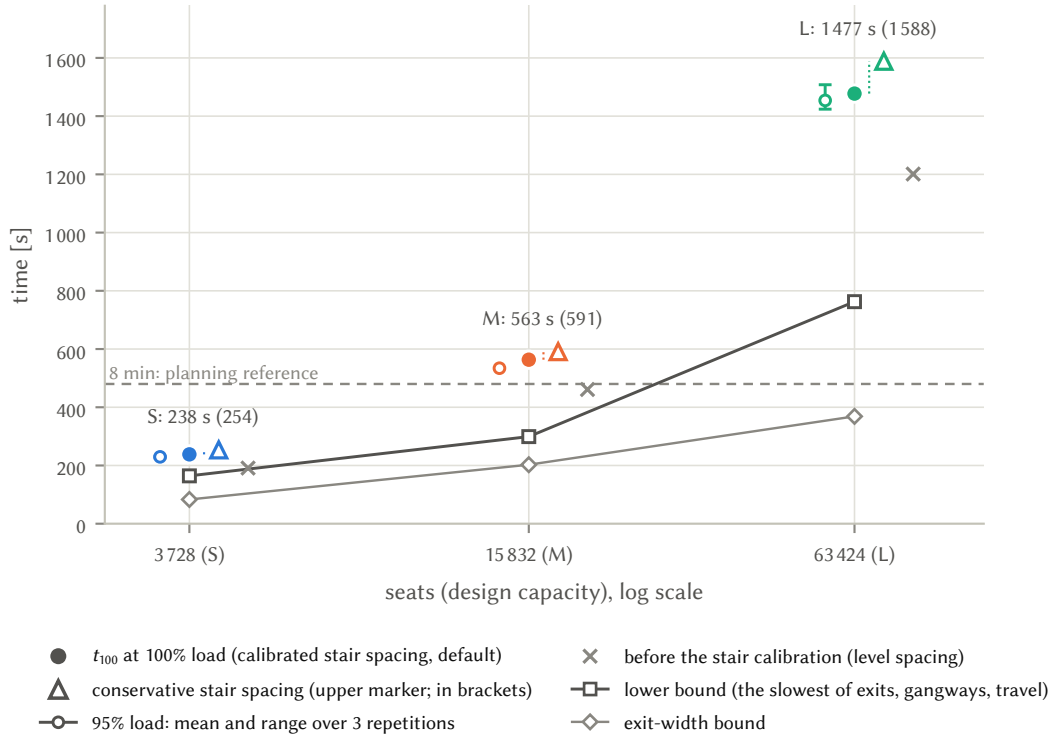
L: 1477 s (1588)
M: 563 s (591)
8 min: planning reference
S: 238 s (254)
time [s]
1600
1400
1200
1000
800
600
400
200
0
3728 (S)
15832 (M)
63424 (L)
seats (design capacity), log scale
t_{100} at 100% load (calibrated stair spacing, default)
conservative stair spacing (upper marker; in brackets)
95% load: mean and range over 3 repetitions
before the stair calibration (level spacing)
lower bound (the slowest of exits, gangways, travel)
exit-width bound