

Introduction

This is a brief summary of the main projects from my experience. Presented projects were made for non-commercial purposes. Watermarks and low-quality images are used to insure protection of intellectual rights.

Contents

1. Helium cryogenic cooling system with a capacity of 2 kW per 100-150 K	2
Designed devices	2
System layout	3
2. Vibrodiagnostics and numerical analysis of composite materials	3
Designed experimental setup	3
Finite element analysis	4
3. Design of a twin shaft shredder	4
Twin shaft shredder with drive	4
Twin shaft shredder	5
Two-stage coaxial gearbox	5
Sleeve-pin coupling	6
The rack	6
3. Design of a twin shaft shredder	6

1. Helium cryogenic cooling system with a capacity of 2 kW per 100-150 K

For my bachelor's degree thesis, a helium cooling system with required characteristics: **cooling capacity of 2 kw per 100-150K** was designed. Starting from the possible application of cooling high temperature superconductive elements, an analysis of possible solutions to achieve the required characteristics was carried out. Then the calculation, design and modelling of the chosen cooling system (figure 2) were made. Main devices such as main heat exchanger and centrifugal fan were designed (figure 1).

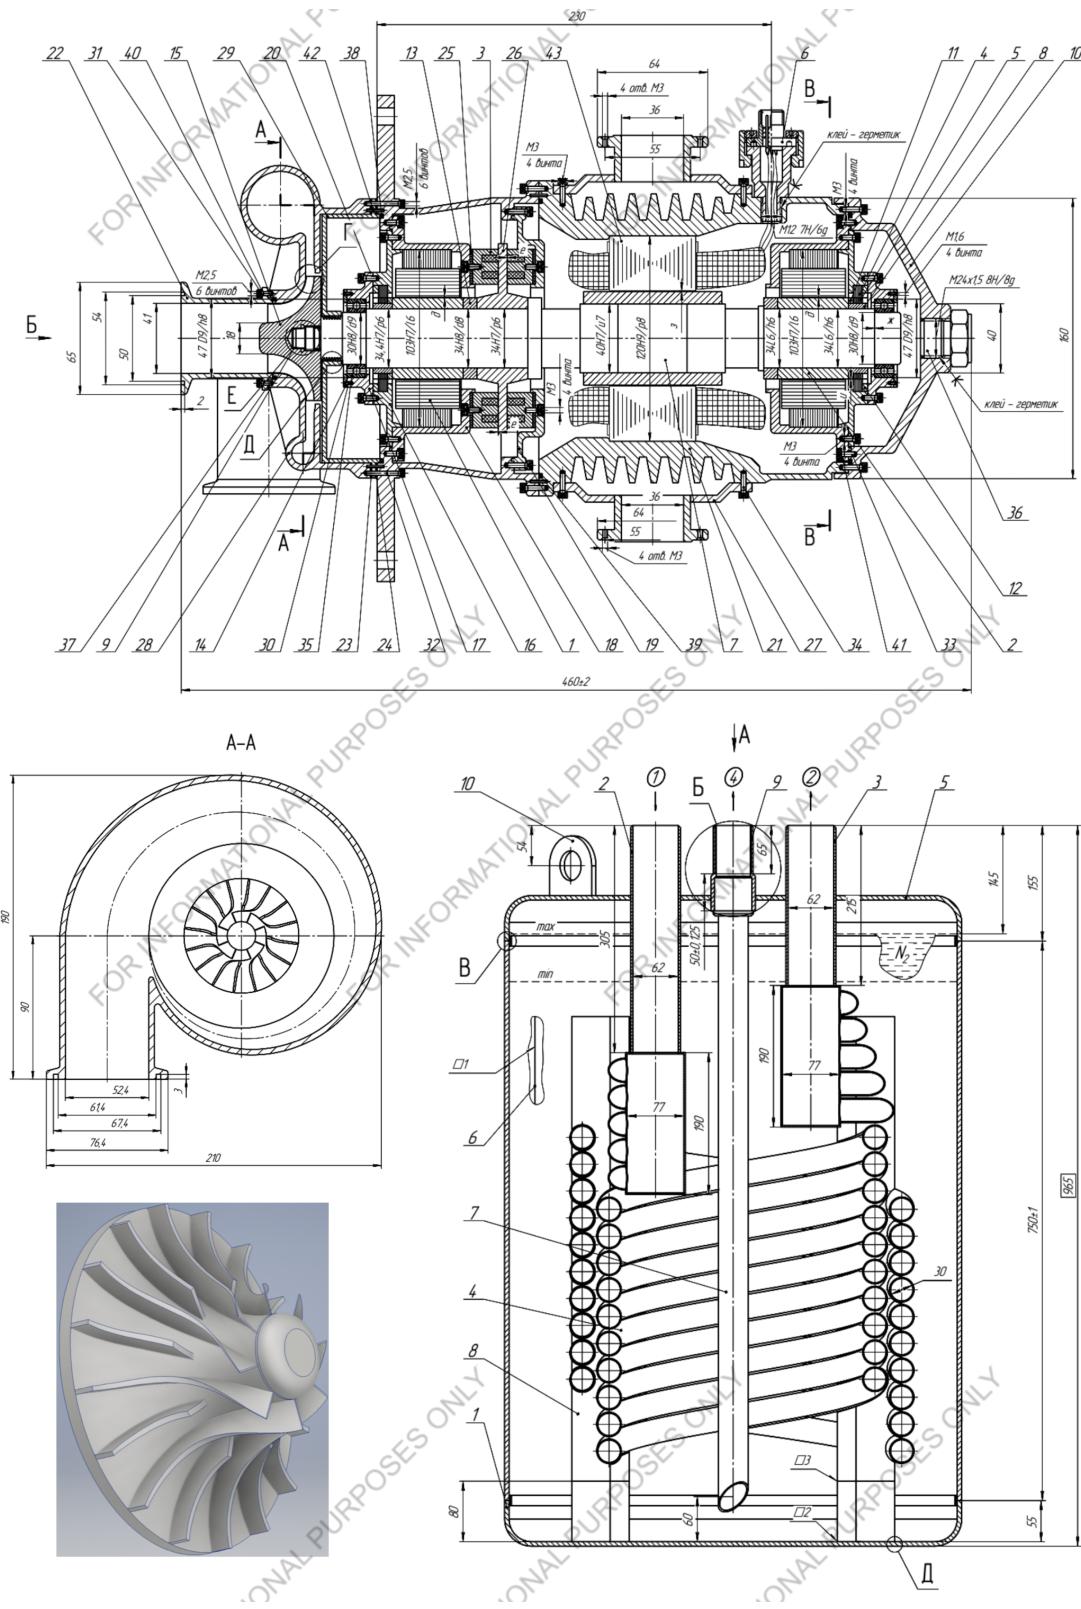


Figure 1: Designed apparatus


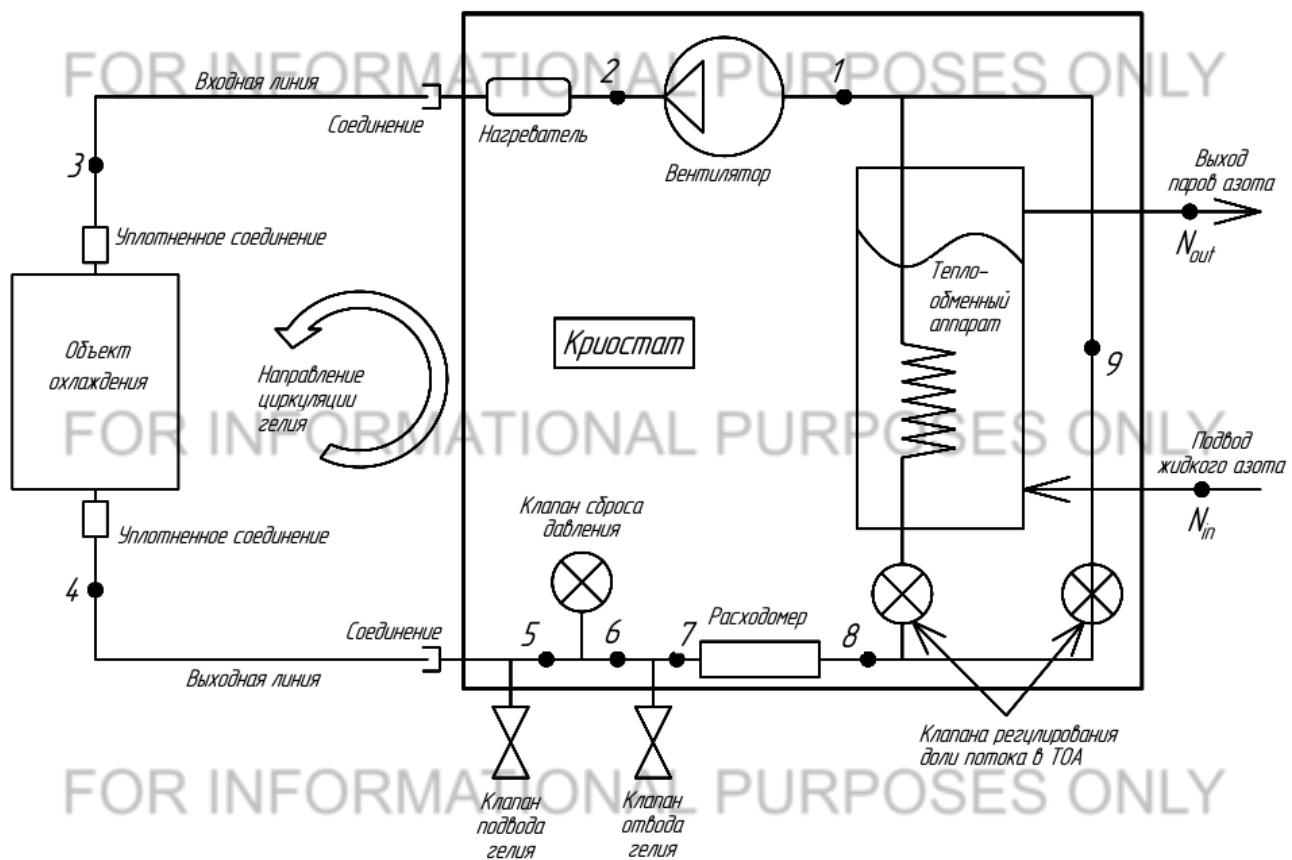


Figure 2: System layout

2. Vibrodiagnostics and numerical analysis of composite materials

During my last year of Bachelor's degree, I worked in a group research project about vibrodiagnostics of composite materials. The project consisted of the both mathematical and experimental analysis of the characteristics of carbon fibers plate.

At first, a stand suitable for the experimental conditions was developed. Starting from electric vibration generator the goal was to design such equipment, that would be able to fix firmly a thin plate in various positions. At first, a 3-D model was made (figure 3a), than it has been analysed for strength and compliance with stiffness requirements, and then the actual equipment was made using manual machines (figure 3b).

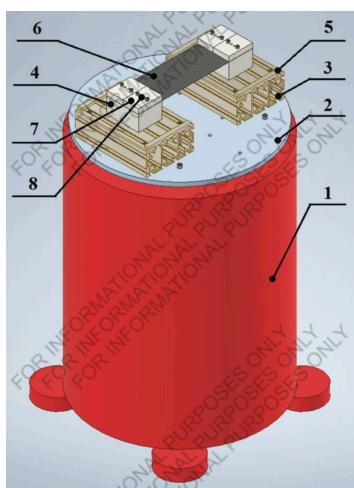

(a) Model of the experimental setup



(b) Actual experimental setup

Secondly, a theoretical assessment of natural frequencies was carried out using finite element analysis. In particular, ANSYS packages were used. Results are presented on the figure 4.

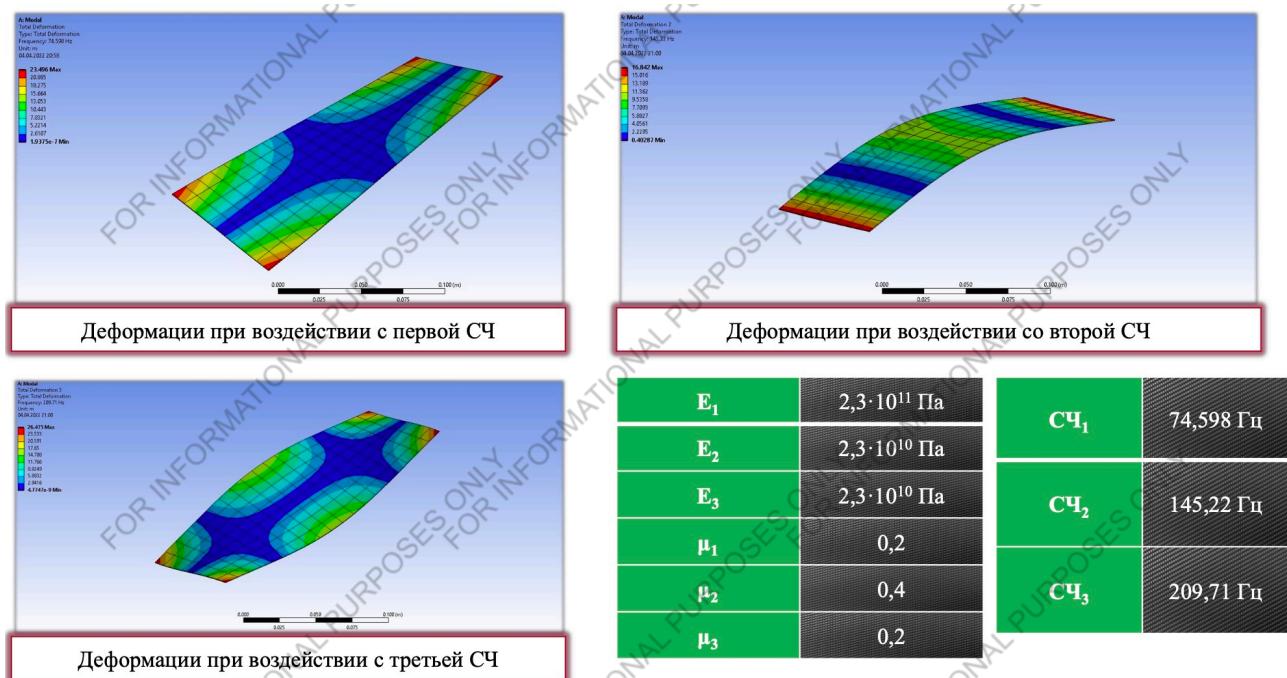


Figure 4: Results of finite element analysis

Then, an experiment was carried out. The received data was processed through *LabVIEW* software.

At the end, natural frequencies obtained theoretically and experimentally were compared.

3. Design of a twin shaft shredder

Another big project from mechanical engineering field was a design of a twin-shaft shredder power 7,5 kW with drive(figure 5).

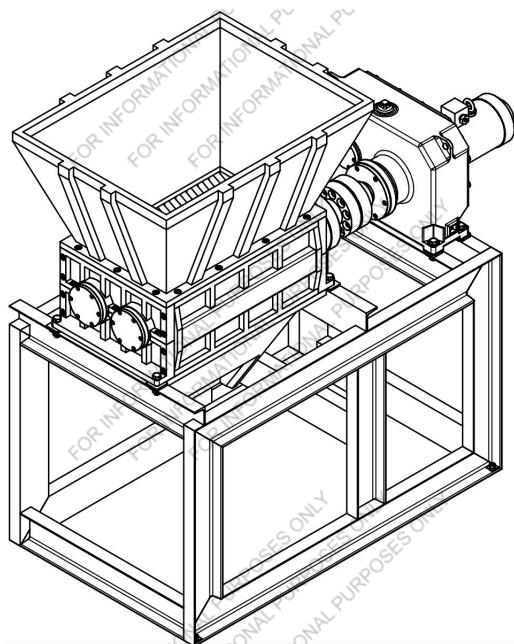


Figure 5: Twin shaft shredder with drive

The project included selection of electric motor and design of all the other devices: the shredder itself (figure 6), two-stage coaxial gearbox (figure 7), sleeve-pin coupling with rubber elastic elements (figure 8a), and the rack (figure 8b).

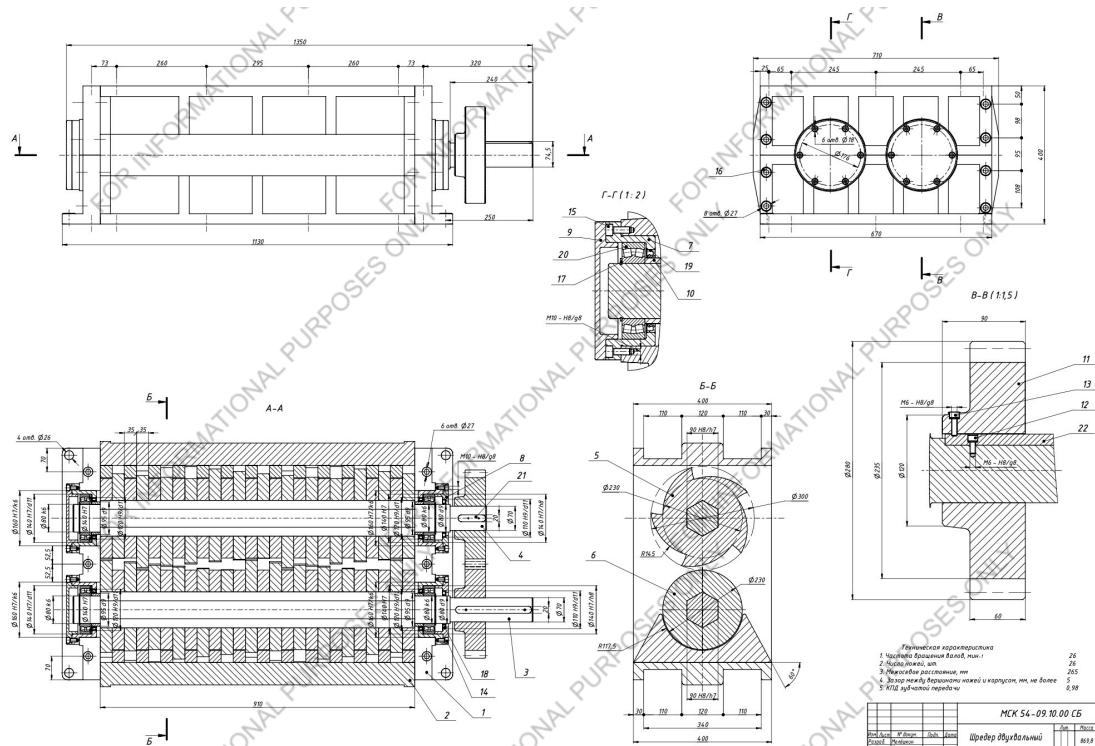


Figure 6: Twin shaft shredder

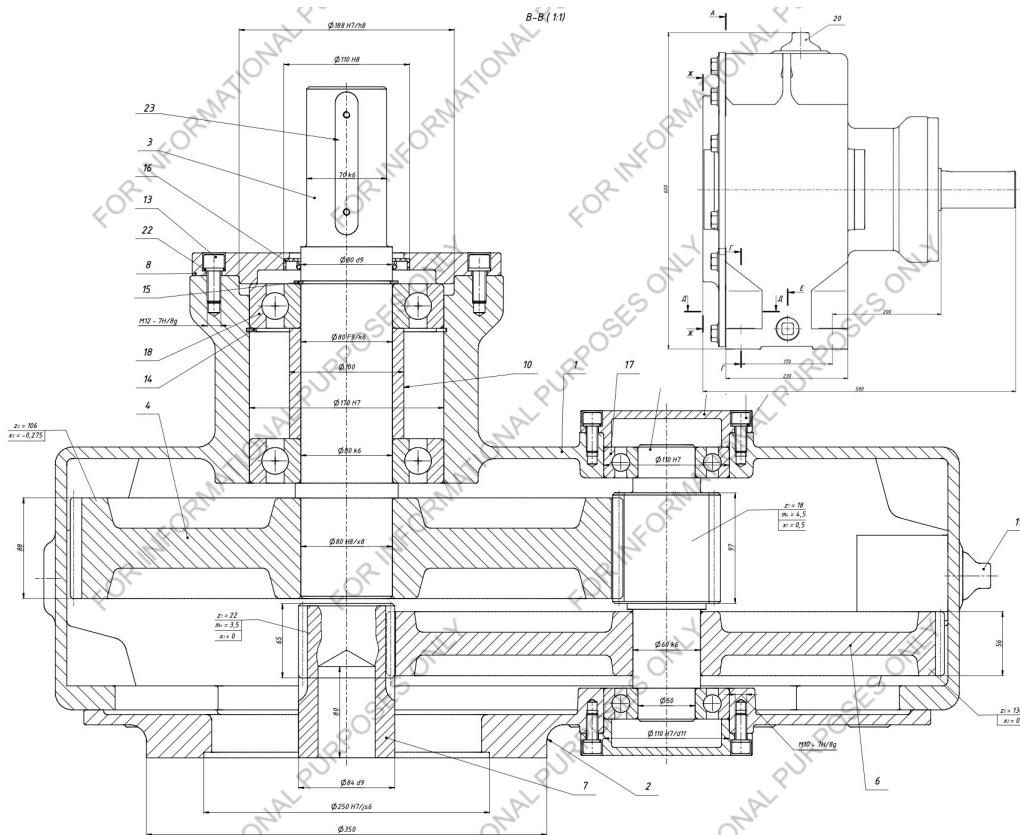


Figure 7: Two-stage coaxial gearbox

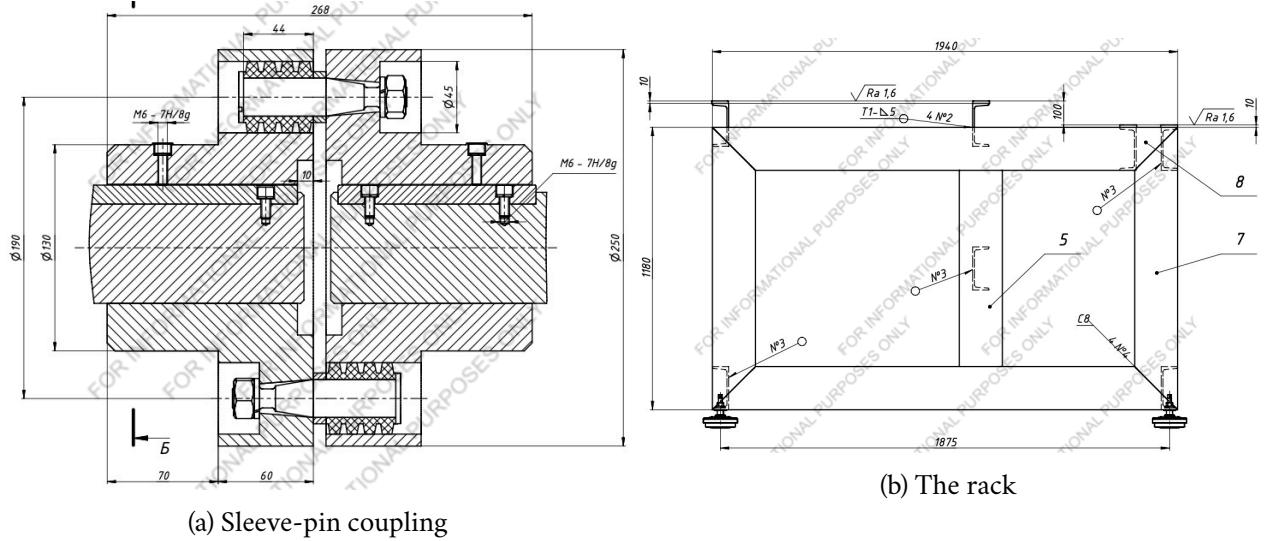


Figure 8: Designed devices

Initially everything was designed as three-dimensional models using Autodesk Inventor software. Then design documentation was made according to the standards, through Autodesk AtuoCAD.

3. Design of a twin shaft shredder