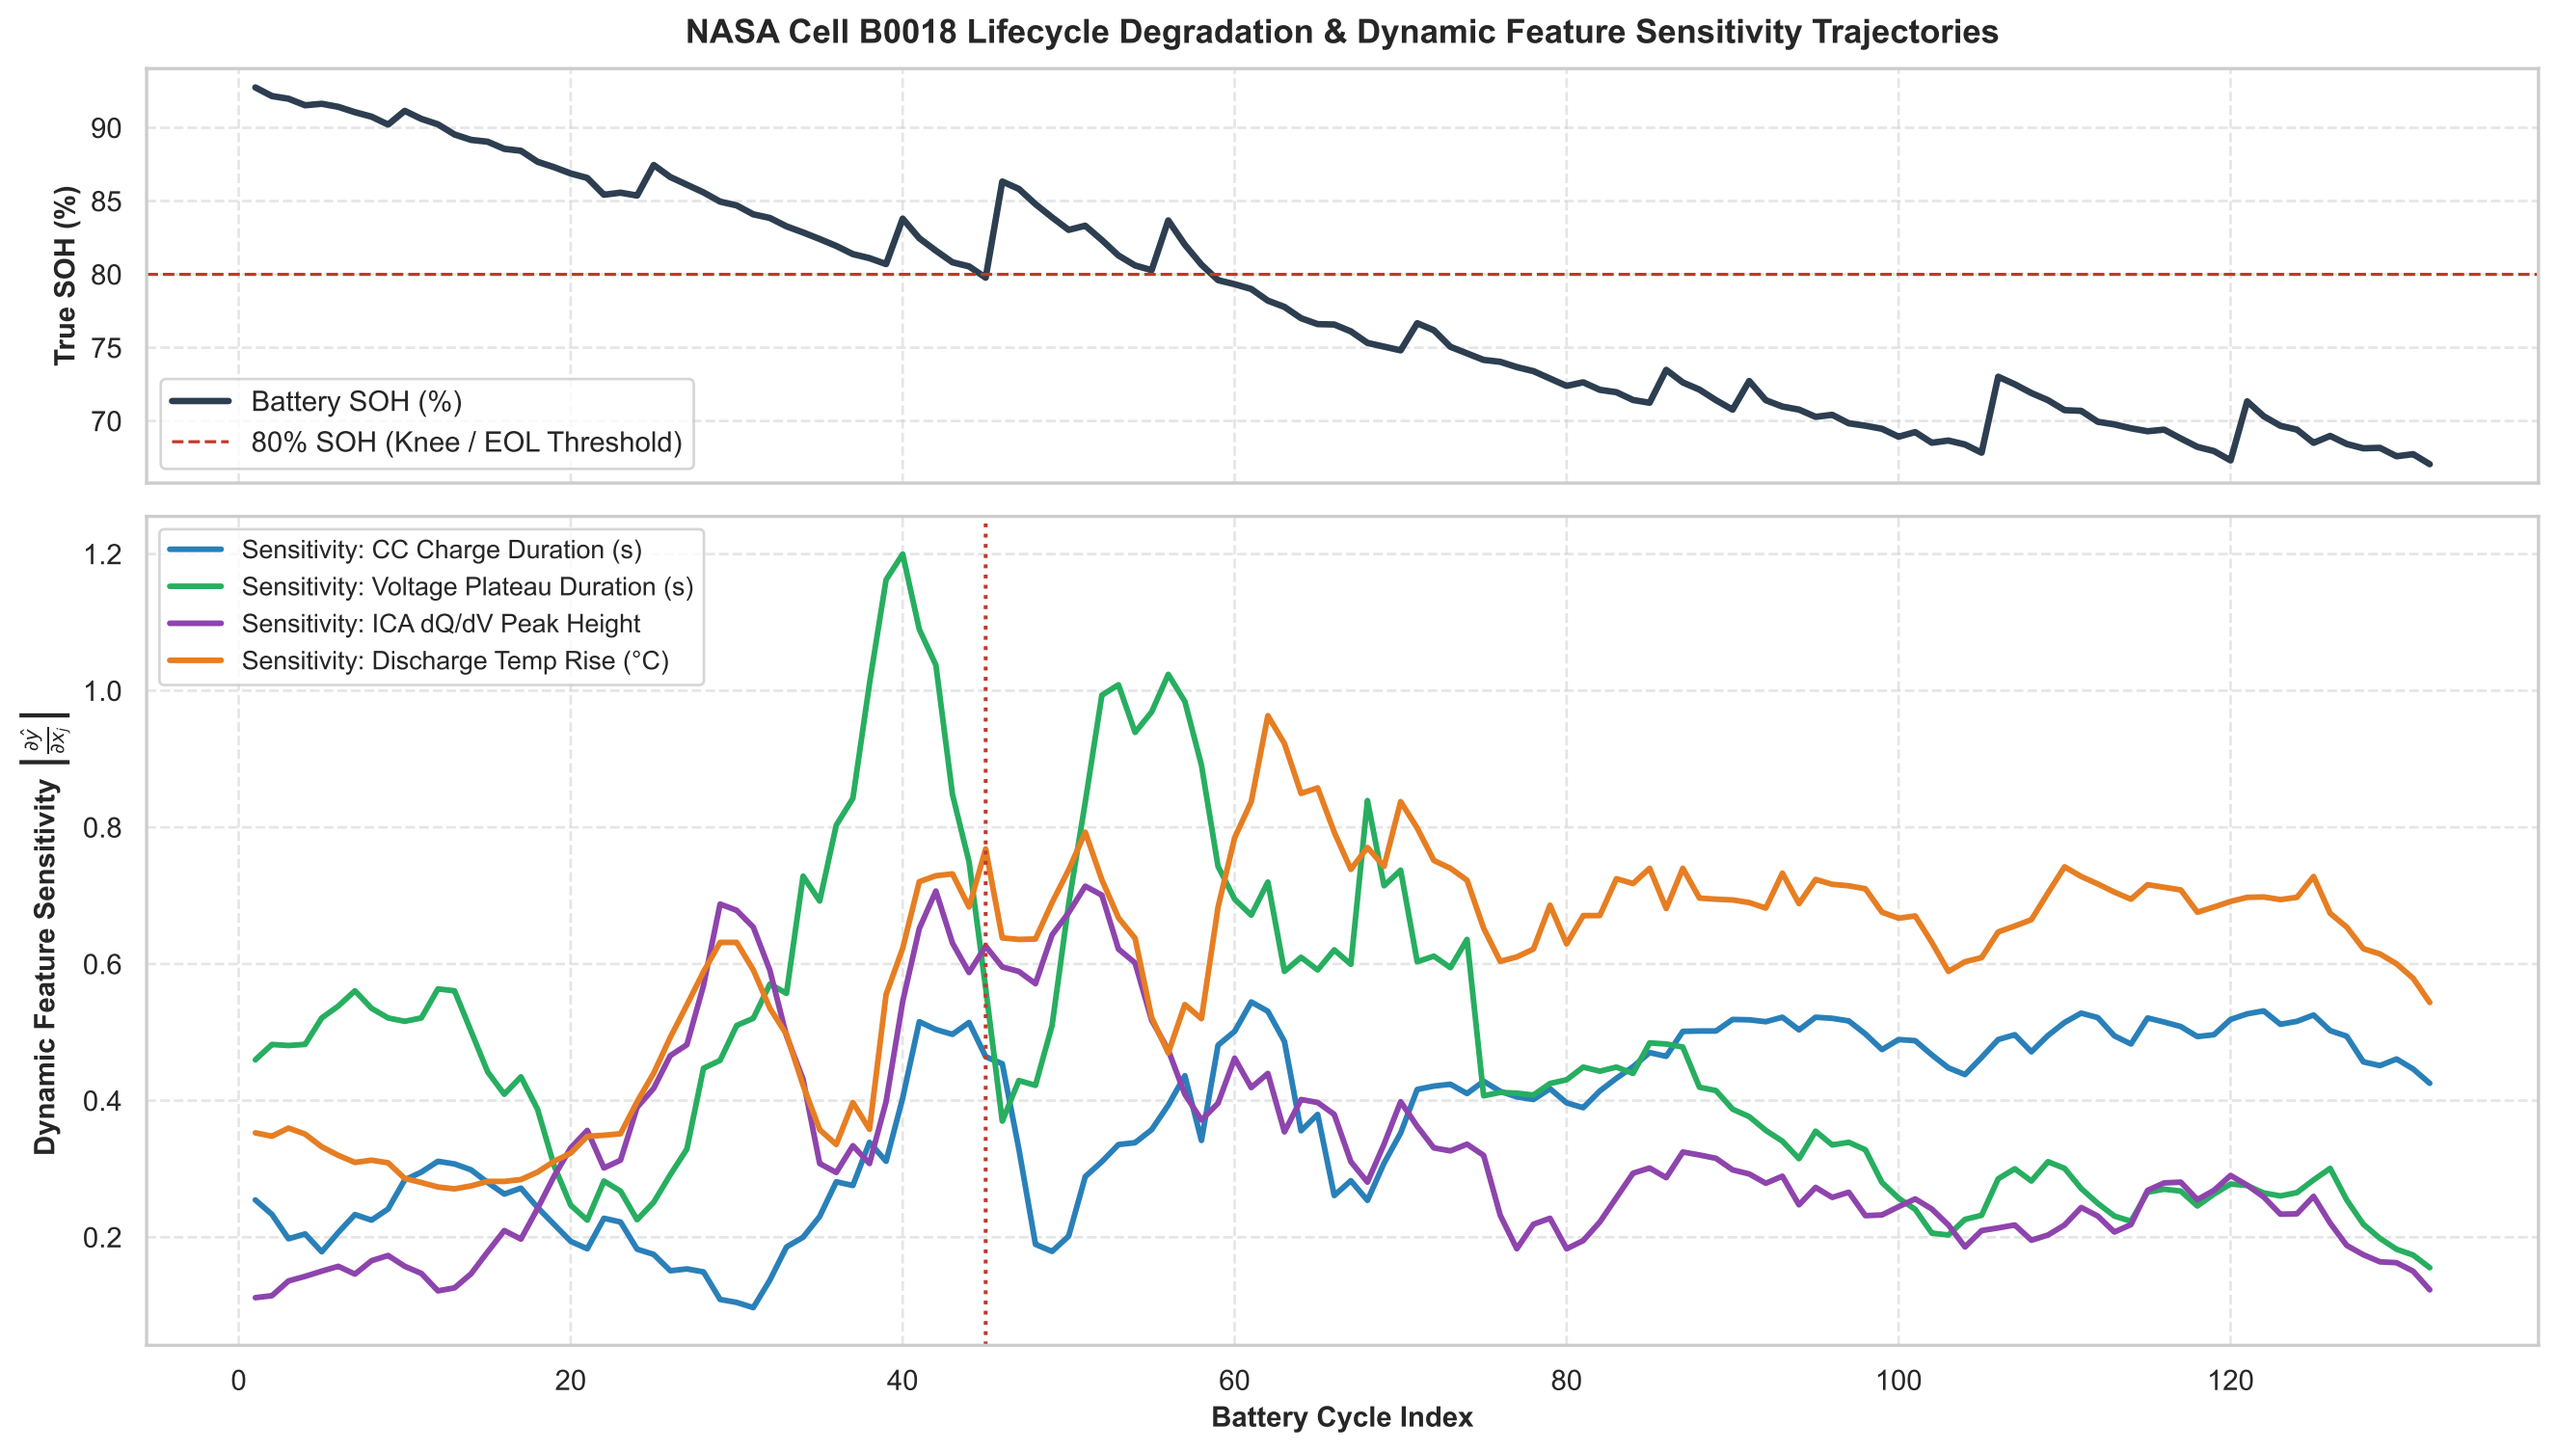
NASA Cell B0018 Lifecycle Degradation & Dynamic Feature Sensitivity Trajectories
True SOH (%)
90
85
80
75
70
Battery SOH (%)
80% SOH (Knee / EOL Threshold)
Dynamic Feature Sensitivity $\left|\frac{\partial \hat{y}}{\partial x_j}\right|$
1.2
1.0
0.8
0.6
0.4
0.2
Sensitivity: CC Charge Duration (s)
Sensitivity: Voltage Plateau Duration (s)
Sensitivity: ICA dQ/dV Peak Height
Sensitivity: Discharge Temp Rise (°C)
0
20
40
60
80
100
120
Battery Cycle Index