

SMH
SHYAM MACHINE HOUSE



BEST-IN-CLASS MACHINERY

Shyam machine house is the leading manufacturer and importer an extensive array of Coil winding machine Coil & core taping machine, Sleeve cutting machine, Toroidal core winding machine, Etc.

PRODUCT CATALOGUE 2026

www.shyammachines.com

QUALITY IS OUR PRIORITY & SERVICES

CONTENTS

Item code	Page no.
SINGLE SPINDLE WINDING MACHINE	02
DOUBLE SPINDLE WINDING MACHINE	02
COIL & CORE TAPPING MACHINE	03
SLEEVE INSERTING MACHINE	04
AUTOMATIC ANGULAR SOLDERING MACHINE	05
ANGULAR SOLDERING MACHINE	06
DIP POT (LEAD FREE)	07
TRANSFORMER TESTER	08
DIGITAL LCR METER	09
AUTO ROTATE HOOK WINDING MACHINE	10
MANUAL HOOK WINDING MACHINE	10
TOROIDAL WIRE CUTTING AND STRAIGHTENING MACHINE	11
WIRE ENAMEL REMOVING MACHINE	11
DOUBLE SPINDLE WINDING MACHINE	12
HEAVY DUTY COIL WINDING MACHINE	12
EI LAMINATING MACHINE	13
CRIMPING MACHINE	13
VOICE COIL WINDING MACHINE	14
WINDING MACHINE WITH TAIL STOCK	14
SLEEVE CUTTING MACHINE	15
SPARE PARTS	16-20



Company Profile

Shyam Machine House is a manufacturer and importer of automation and industrial machines based in Delhi, India, specializing in products like coil winding machines, coil tapping machines. The company, which operates as a partnership, focuses on "quality first" and customer satisfaction, and its product range also includes soldering pots, sleeve cutting machines, and various controllers and fixtures.

Products: The company manufactures and importer a wide range of machines, including:

- Coil winding and tapping machines
- Toroidal machines
- Sleeve cutting machines
- Solder pots and soldering machines
- Machine fixtures
- Machine controllers (including CNC winding and tapping machine controllers)

SINGLE SPINDLE WINDING MACHINE

SM-01S



TECHNICAL SPECIFICATIONS

FEATURES	DETAILS
Turn Accuracy	- + 0.5 - turn
Winding speed	6000 RPM/Maximum
Winding width	0-100 mm
Swing diameter	90 mm
Wire diameter	0.03 mm 1.20 mm (40swg-20swg)
Programs	399 in built LED
Break	In Motor BLDC
Traverse	Hybrid Step motor
Motor Power	400 Watt BLDC
Source	AC 220V 50Hz Single Phase

TECHNICAL SPECIFICATIONS

FEATURES	DETAILS
Wire	0.03-1.0mm
Winding	0-110mm
Maximum Winding Diameter	150mm
Winding Spindle	Double Spindle
Spindle Motor	Brushless DC
	600W Plus Drive
Wiring Motor	Stepper Motor
Machine Speed	8000 RPM
Number Of Memory Groups	1000
Voltage	AC 220V/50HZ
Machine Weight	35kg

DOUBLE SPINDLE WINDING MACHINE

SM-02D



SM-6TM



FEATURES :

1. Manual Loading
2. Auto Taping
3. Auto Unloading

TECHNICAL SPECIFICATIONS :

FEATURES :

Power Source
Weight
Working Speed
Suitable Products
Option
Membrane Range
Number Of Turns
Two-axis Wheel Base

DETAILS

AC 220V 50HZ
45Kgs
1.2sec/pc
EE8-PQ Series
AC motor
34mm-77mm are applicable
1-9 turns, the number of turns can be arbitrarily set
Diaphragm axis distance from 25mm-85mm can be Adjusted.

SM-01SI

**TECHNICAL SPECIFICATIONS**

The automatic bushing machine produced by our company is suitable for automatic production of high-frequency transformers requiring bushing and winding. It is easy to operate, save labor, and improve efficiency.

Main preparation and technical parameters :

- Model: SM-01SI
- Working voltage : 200V, 50HZ 220V, 50HZ
- Machine weight : 8.8Kg
- Air pressure requirement : 0.5MPa

Instructions for use :

- Microcomputer Control, easy to operate.
- The size and length of the casing can be adjusted and the size is accurate.
- The copper wire is adjustable, suitable for the production of most bushing transformers.
- Easy to use with CNC, quick to get started, guarantee quality and improve production efficiency.
- The casing specification is 14L-30L.
- The copper wire range is 0.1mm~1.5mm
- Multi-stranded wire and insulated wire can be worn.

SM-O2AAS



TECHNICAL SPECIFICATIONS

FEATURES

DETAILS

Equipment size	L 900mm x W 160mm x H 1700mm
Motor quantity	3 sets/2 sets of servo motors and 1 set of stepper motors
Function	Loading, applying rosin, soldering, cooling, unloading
Solder angle	360 degrees
Feeding method	Conveyor belt, hand-held swing/optional
Blanking method	Conveyor belt
Flux addition method	Storage tank + pump + automatic circulation
Temperature control method	Thermostat + Solid State Relay
Tin furnace dimensions	L350mm x W 100mm x H 50mm
Power supply	220V / 50HZ
Air pressure	0.5 - 0.6Mpa
Total power	2.3KW
Equipment weight	200Kg

SM-O2AS



FEATURES :

- | | |
|------------------------------|---------------------|
| 1. Manual Loading | 5. Preheat |
| 2. Turning to the other side | 6. Manual Unloading |
| 3. Turned to angle | 7. Auto Soldering |
| 4. Soldering the other side | |

TECHNICAL SPECIFICATIONS :

FEATURES :

POWER SOURCE
DIMENSION
WEIGHT
DIP POT DIMENSION
WORKING SPEED
POT MATERIAL
TEMPRATURE
SUITABLE PRODUCTS
TRAVERSE
CONTROLLER
MOTOR

DETAILS

AC 220V 2000W
500(L) x 850(W) x 660(H) mm.
60Kgs
295(L) x 105(W) x 65(H) mm
10-20 pcs/12 sec
Titanium
0-600 C
Inverter, Choke
Max 76mm (Stepping motor)
CNC
Stepper motor

SM-101A 155(L) x 95(W) x 20(H) mm



SM-101B 155(L) x 55(W) x 40(H) mm



SM-101C 135(L) x 40(W) x 12(H) mm



SM-101E 155(L) x 110(W) x 35(H) mm



SM-101H 60(L) x 60(W) x 30(H) mm



SM-101K 295(L) x 100(W) x 35(H) mm



Technical Specifications:

POWER SOURCE	AC 220V 1 phase
WEIGHT	6Kgs
POT MATERIAL	Titanium
TEMPERATURE	Up to 600 C

Features :

1. Titanium inner bath to with stand high temperature
2. Side inserted heaters enable easy maintenance
3. Precision temperature controller

SM-5089



FEATURES :

- 7-inch TFT LCD display with a resolution of 800*RGB*480
- Frequency up to 1MHz, resolution: 0.5mHz
- Signal level: 5mV-2Vrms, optional (2Vrms-10Vrms)
- Built-in 0-100mA/0-10V bias power supply, optional 1A/2A bias current source
- Up to 75 times/sec test speed
- Diode forward and reverse characteristic detection
- Improved high turns ratio and weakly coupled transformer test capability
- Improved DCR testing capabilities
- Single screen can accommodate all scan test results
- Time stamping system: memory file setting, calibration deviation and deduction time
- Sort the selected scanning parameters.
- Self-test scanning fixture relays
- Flexible deviation deduction method
- Multiple handling ways for FAIL cases
- Single parameter test cycle to test independent windings
- Increased security: administrator and operator passwords
- Built-in statistical analysis capabilities: Cpk, Cp, Ck, etc.
- Bar-code reading function can be used to select a setting file or to manage the type of test products
- Optional PC-level instrument test setup file programming capability
- Online upgrade mode: USBHOST or RS232
- Support multiple instrument networking through LAN interface
- Backward compatible with TH2818X/TH2819X parameter setting file
- Storage: Internal: 100 groups of settings file to save U disk: 500 groups of configuration files, CSV format test data, GIF format images

TECHNICAL SPECIFICATIONS :

Test Pin(PIN)	20
Test frequency	20Hz-200kHz
Display	800xRGBx480 7 inch TFT LCD display
LCR Function	option
Transformer test parameters	Turn Ratio Turns Phase L C Lk Q ACR DCR Balance Pin Short Diode P/N
LCR test parameters	ZI, YJ, C, L, X, B, R, G, D, Q, Θ , DCR, Turn-Ratio, Phase, Lk
Basic test accuracy	LCRZ 0.05% DCR, Turn Ratio 0.1%
Signal source output impedance	10 Ω , 30 Ω , 50 Ω , 100 Ω
Test speed (ms/times)	13ms, 90 ms, 370 ms
AC signal level	5mVrms 2Vrms(transformer test, can be customized to 10Vrms), 5mVrms 10Vrms(LCR function); 50mArms-100mArms
DC bias voltage source	---- 0V----- $\pm$ 10V; 0mA----- $\pm$ 100mA
DC bias current source	0-- $\pm$ 1A option(option TH2901)/0----- $\pm$ 2A option(option TH2902)
DC constant current source	0mA---- $\pm$ 120mA for diode forward characteristic test
Diode test	forward test voltage 0-9.9999 V Reverse test current 0-99.999 mA
Comparator	10 bins, PASS/FAIL indication, file counting function
Storage	Internal: 100 sets of configuration file; U disk: 500 sets of configuration files, CSV format test data, GIF format images

SM-2344



Power Supply 198V-252VAC, 48.5-52.5Hz

Power: maximum 10VA

A general-purpose LCR digital bridge, which is a micro desktop instrument controlled by a high-performance microprocessor. Four test frequencies of 100Hz-10kHz, selectable for 0.1V, 0.3V, and 1V levels, and selectable for 30 Ω and 100 Ω source internal resistance. The instrument can automatically measure inductance L, capacitance C, resistance R, complex impedance Z, quality factor Q, and loss angle tangent D.

The newly designed as the highest cost-effectiveness and a foolproof operation interface, which can easily meet the requirements of various component manufacturers, schools, research institutes, and metrology and quality inspection departments for precise testing and mass production

FEATURES :

Parameters	L,C,R Z ,D,Q	Test Speed	Slow: 3t/s Fast: 10t/s
Accuracy	0.25%	Equivalent method	Series and parallel connection
Frequency	100Hz,120Hz,1kHz,10kHz	Display Results	show, sorting results
Display Range	L:0.01 μ H-9999H C: 0.01pF-9999 μ F RZ: 0.0001 Ω -99.99M Ω D: 0.0001-9.999 Q:0.0001-999.9	Calibration	open/short sweep frequency
Source Resistance	30 Ω , 100 Ω	Comparator	5-bin sorting
Display Range	Main parameter: 99999 Secondary parameter: 99999	Beep	P1,P2, P3, AUX, NG, OFF
Test Range	Auto and manual, 6 range	Others	LCR automatic parameter selection, 0.8-inch highlighted LED display
Signal Level	0.1Vrms, 0.3Vrms &1Vrms	Accessories	ATL501 Test cable

SM-01AR



TECHNICAL SPECIFICATION

FEATURES :	DETAILS
Source power	AC220V/50HZ
Dimension	700(L) * 700(W) * 1200(H)
Winding Speed (PBM)	60
Wire size	0.5-2mm
Minimum ID	8mm
Spindles	1
OD range	15-70mm
Hook size	3mm to 10mm
List of turns	1

MANUAL HOOK WINDING MACHINE

SM-02MR



TECHNICAL SPECIFICATION

FEATURES :	DETAILS
Head	Hook
Wire Dia. in SWG/mm	23-15
Min Core I.D. (mm)	10
Min/Max Core O.D. (mm)	20to50
Max Core Ht (mm)	50
Max Coil Wt (in Kg)	1.5

Minimum O.D:15mm
Maximum O.D:60mm
Minimum ID: 5mm
Minimum Wire Size: 0.3mm
Maximum Wire Size: 2.0mm
Minimum Core Height: 50mm

CAPABILITIES	
NEEDLE	MAXIMUM WIRE SIZE
3.2 mm.	0.8 mm
4.8 mm	1.2 mm
6.4 mm	1.7 mm.
9.5 mm	2.0 mm

SM-O3WT



WIRE ENAMEL REMOVING MACHINE

SM-O4ER

TECHNICAL SPECIFICATION

FEATURES :

Applicable wire diameter

DETAILS

0.5-3.0mm

Machine size

300*180*230

Machine power

120W

The speed of the paint stripper

2800RPM/

Machine power supply

AC220V/50HZ

Machine weight

9kg



SM-01DS



TECHNICAL SPECIFICATION

FEATURES :

- Memory
- Turn Set Each Programers
- Production Counting
- Power Fail
- Traverse Width (Bobbin)
- Traverse Motor
- Spindle Motor
- Brake With Clutch
- Winding Pitch Adjust
- Supply
- Winding Speed
- Total Taps
- Bobbin Swing Diameter
- Coil Weight
- Acceleration Time
- De Acceleration Time
- Online Turns Indication
- Controller Security Provided
- Standard Accessories
- Total Weight With Stand
- Wire Size
- Warranty

DETAILS

- 1000 Programs' Storage
- 99.999 Max Turns
- Provided
- Counter Will Not Reset
- 100mm Max
- Stepper Motor With Drive
- .25 Hp Dc Motor
- 24V Electromagnetic
- Provided Online Key
- 220V 50hz 1 Phase
- 7000 RPM
- 8 Taps Each Prog Provided
- 20 To 100mm Provided
- Max 3Kg
- Programmable
- Programmable
- Yes
- Password Option
- Moto Belt, Wire Tensioner Stand, Allen Keys, Power Cord
- 50KG
- 22 to 48
- 1 Year From The Date

TECHNICAL SPECIFICATION

FEATURES :

DETAILS


- | | |
|----------------------|---|
| Production Count | Provided |
| Power Fail Save | Counter Will Not Reset |
| Traverse Moving | 1 TO 120mm You Can Set |
| Traverse Motor | Stepper Motor with Drive |
| Spindle Motor | 180V-180W 1500 RPM PMDC Motor (0.5 HP motor) |
| Brake | 24V Electromagnetic |
| Every Layer Stop | ON/OFF. Indication Online |
| Supply | 220V 50HZ 1 Phase |
| Jog Speed | Online Key Provided |
| Total Taps | 8 Taps Each Prog Provided |
| Bobbin Width | 120mm Provided |
| Bobbin Diameter | 200mm Provided |
| Coil Weight | Max 3 kg |
| Acceleration time | Programmable 0-9 Sec |
| DE Acceleration | Programmable 0-9 Sec |
| Controller Security | Password Option Provided |
| Standard Accessories | Timing Belt, Machenical Wire guide, |
| Warranty | Allen Keys, Power Cord. |
| Total Weight | 1 Year From The Date Of invoice |
| Wire Size | 70kg |
| Program | 16 to 32 SWG |
| | 999 program |

HEAVY DUTY COIL WINDING MACHINE

SM-02HD



SM-O5EI

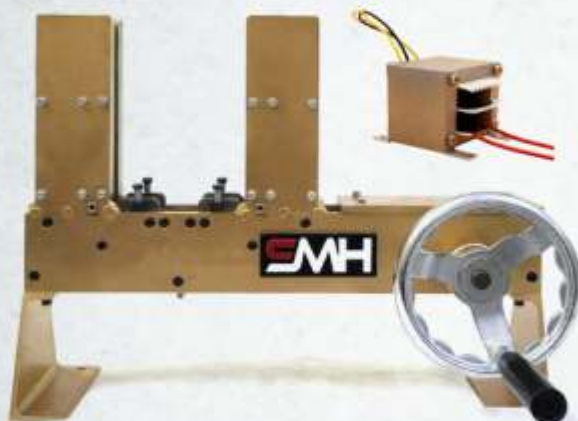

TECHNICAL SPECIFICATION

Size Spec.	X	Y	Z	Size	Speed Pcs/Per Min
E-19	19mm		12.5	40W	400Pcs/Per Min
E-24	24		15	60W	400Pcs/Per Min
E-26	26		16	1/2HP	320Pcs/Per Min
EI-28	28	25.2mm			
EI-35	35	29.5			
EI-41	41	33			
EI-48	48	40			
EI-54	54	45			
EI-57	57	47.5			
EI-60	60	50			
EI-66	66	55			
EI-76.2	76.2	63.5			
EI-78	78	65			
EI-85.8	85.8	71.5			
EI-95	95	82.5			
EI-96	96	80			
EI-102	102	89			

CRIMPING MACHINE

SM-09CM

TECHNICAL SPECIFICATION

FEATURES :

DETAILS

Output force	1.3T Air Pressure 0.5Mpa
Applicable air pressure	0.5 ~ 0.7Mpa
Max. operating pressure	1.0Mpa
Max. crimping capacity	Insulated terminal 16mm ²
External dimension	226mm x 142mm x 117mm
Weight	3.5kg



SM-O8VC



TECHNICAL SPECIFICATION

FEATURES	DETAILS
Wire	0.03-0.8mm
Winding	0-110mm
Maximum winding diameter	150mm
Winding spindle	Single axis
Spindle motor	600W Brushless DC 600W plus drive
Wiring motor	Stepper motor
Machine speed	5000RPM
Number of memory groups	1000
Voltage	AC220V/50HZ
Machine weight	72kg

TECHNICAL SPECIFICATION

FEATURES	DETAILS
Wire size	0.03-1.5mm
Winding width	0-300mm
Maximum winding diameter	260mm
Winding spindle	Single axis
Spindle motor	Servo motor
Wiring motor	Servo motor
Machine speed	0-2000RPM
Number of memory groups	1000
Voltage	AC220V/50HZ
Machine weight	50kg

WINDING MACHINE WITH TAIL STOCK



SM-SL100

**TECHNICAL SPECIFICATIONS**

<u>FEATURES</u>	<u>DETAILS</u>
Cutting Width	1-100mm
Cutting Length	0.1-9999.9mm
Speed Adjust	can adjust
Power	AC220/50Hz AC110/60Hz
Tolerance	0.1mm
Machine Weight	23kg



CERAMIC SM-12



PU BELT SM 13



PMDc MOTOR SM-14



BLDC MOTOR CNC-90



FOOT SWITCH SM-16



STEPPER MOTOR CNC-108



FELT, PULLY & TIMING BELT SM-18



TAPPING MACHINE CONTROLLER SM-19



TAPING MACHINE SENSOR SM-20



WINDING MACHINE BLDC CONTROL SM-102



TAPING MACHINE MOTOR SM-22



WINDING MACHINE DC CONTROLLER SM-200A



SWITCHES SM-24



WIRE STAND SM-25



**COIL TAPE FIXTURES SM-26
COIL & CORE TAP FIXTURE**



HOOK SM-26



BREAK COIL & BREAK DISC SM-28



**WIRE GUIDE WITH MARGIN TAPE
ATTACHMENT SM-29**



TAPING ATTACHMENT FOR WINDING MACHINE SM-30




WINDING FIXTURES SM-31



HEATER ELEMENT SM-32




LOADING UNLOADING JIGS SM-33

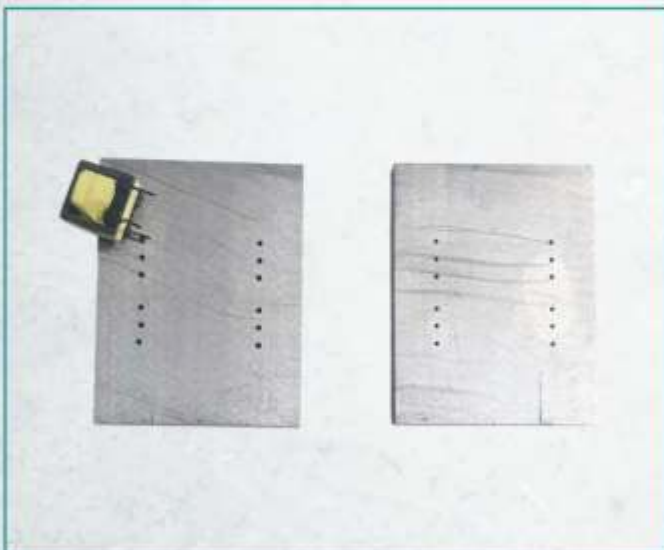

PIN STARATING JIGS SM-34



TESTING JIG-35

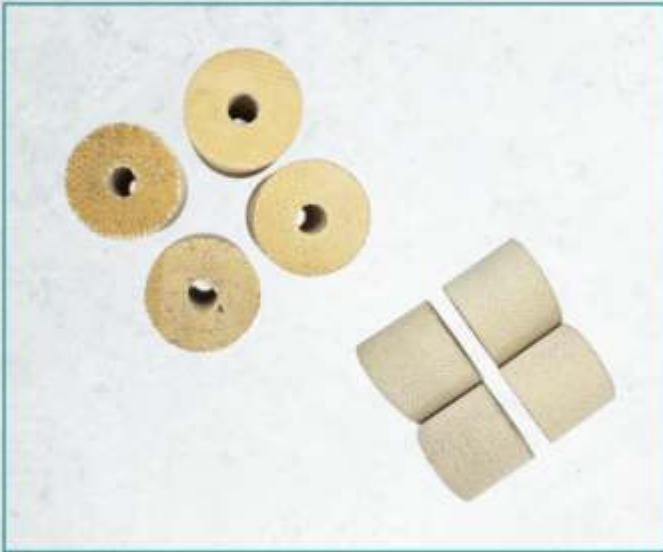

WIRE ENAMEL REMOVER MACHINE ROLLER-36




BUCKET-37



HOOK ROLLER-38



DISPLAY

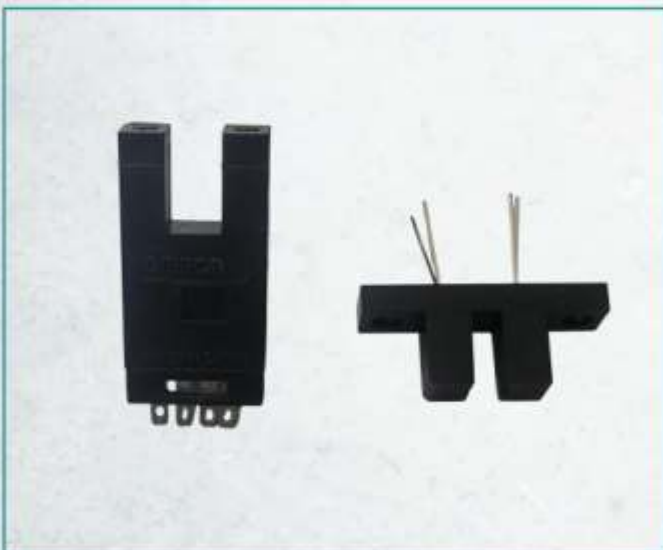

U BLOCK SENSOR



VOICE COIL FIXTURE-41

NOTE





SMH
SHYAM MACHINE HOUSE



- ☎ +91-98997466774, +919650116256
- ✉ shyammachinehouse2015@gmail.com
- 🌐 www.shyammachine.com
- 📍 1/4717 Gali No. 4-5, Balbir Nagar Extn
Near Durga Puri Chowk, Delhi-110032