




1FK21034AH100MA0

3D view

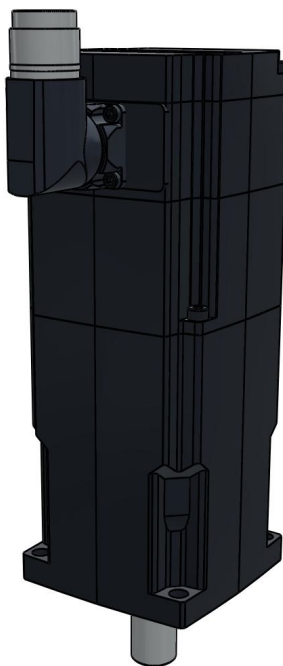

HOW TO ACTIVATE 3D?

To activate the interactive 3D view in Acrobat Reader, you need to select, at the top of the page, **Options** and then **Trust this document**



Zoom

Moves you toward or away from objects in the scene when you drag vertically. You can also zoom with the hand tool by holding down Shift as you drag.



Pan

Moves the model vertically and horizontally only. You can also pan with the hand tool: Ctrl-drag.



Rotate

Turns 3D objects around relative to the screen. How the objects move depends on the starting view, where you start dragging and the direction in which you drag.



Augmented Reality (AR) - Digital meets real

Augmented Reality, often shortened to AR, is a technology that blends digital information into the real world.

For more information, please click [here](#) or directly try yourself by scanning the QR code with your phone.





1FK21034AH100MA0

2D derivation



ISO view



Bill-Of-Materials

N°	Description	Amount
1.1		24



1FK21034AH100MA0

Technical drawings



1FK21034AH100MA0


Technical data

PREVIEW ()	../../../../_pool_/d3/78/p_d211_xx_00934j.png
DESCSHORT (Short Description)	SIMOTICS S-1FK2 HD, SINAMICS S210 3AC 400V-480V, 1.01 Nm, 4500 rpm
DESCLONG (Long Description)	SIMOTICS S-1FK2 HD servo motor M0=1.27 Nm; PN = 0.48 kW at nN=4500 rpm (380-480 V); PN = 0.3 kW at nN=2500 rpm (200-240 V); with holding brake; degree of protection IP64; cylindrical shaft D14 x 30 mm; absolute encoder 22-bit + 12-bit multiturn (encoder AM22DQC); with OCC interface; plug size M17, rotatable; SIMOTICS S-1FK2 servomotor for a wide range of uses in industrial environments. SIMOTICS S-1FK2 servomotors are compact synchronous motors with a high dynamic performance that set themselves apart as a result of their high power density, degree of protection and overload capability. The motors are available in two variants: as High Dynamic variant (highest dynamic performance as a result of the low intrinsic moment of inertia for applications demanding a high dynamic performance with low moved masses) - and as Compact variant (precise and stable closed-loop control for medium up to large moved masses as a result of a medium intrinsic moment of inertia). SIMOTICS S-1FK2 servomotors fully exploit their strengths in a system with the SINAMICS S210 frequency converter and simple connection using the one cable connection (OCC). Advantages include the short control and positioning times, fast and precise correction of disturbing quantities as well as stable control with a high dynamic performance. The servo motors can be configured to address a wide range of requirements. For example with and without holding brake, IP64 or IP65 degree of protection, singleturn or multiturn absolute encoders - to name just a few. Further, the servomotors are available in different shaft heights extending from 20 to 100. A shaft sealing ring is available to achieve an IP65 degree of protection and for subsequent mounting at the motor or as spare part. SIMOTICS - the optimum motor for each and every motion control application.
INTNO (International product number)	195125454019
SUPPLIERALTNO (Alternative product number)	1FK2103-4AH10-0MA0
MANUID (Product number of the Manufacturer)	1FK21034AH100MA0
MANUNAME (Manufacturer Name)	Siemens
MANUTYPEDESC (Manufacturer Type Description)	SYNCHRONOUS MOTOR 1FK2 HD 1,27 NM
AAU732 (Manufacturer product root)	SIMOTICS
AAO057 (Product type)	S-1FK2
AAU734 (Manufacturer product description)	SIMOTICS S-1FK2 HD servo motor M0=1.27 Nm; PN = 0.48 kW at nN=4500 rpm (380-480 V); PN = 0.3 kW at nN=2500 rpm (200-240 V); with holding brake; degree of protection IP64; cylindrical shaft D14 x 30 mm; absolute encoder 22-bit + 12-bit multiturn (encoder AM22DQC); with OCC interface; plug size M17, rotatable;
AAW338 (Manufacturer product designation)	SYNCHRONOUS MOTOR 1FK2 HD 1,27 NM
AAO742 (Brand)	SIMOTICS
AAO663 (GTIN)	4034106444921
NOCUPEROU (Number of content units per order unit)	1
PRICEQUANTITY (Price Quantity)	1
QUANTITYMIN (Minimum Order Quantity)	1
QUANTITYINT (Quantity Scale)	1
CTN (Customs tariff number)	85015100
COO (Country of origin)	RO

1FK21034AH100MA0

CAD plugins

With our CAD integrations, you can use 3Dfindit directly in your CAD system and make your work easier with additional comfort functions, such as replacing a part and many more.

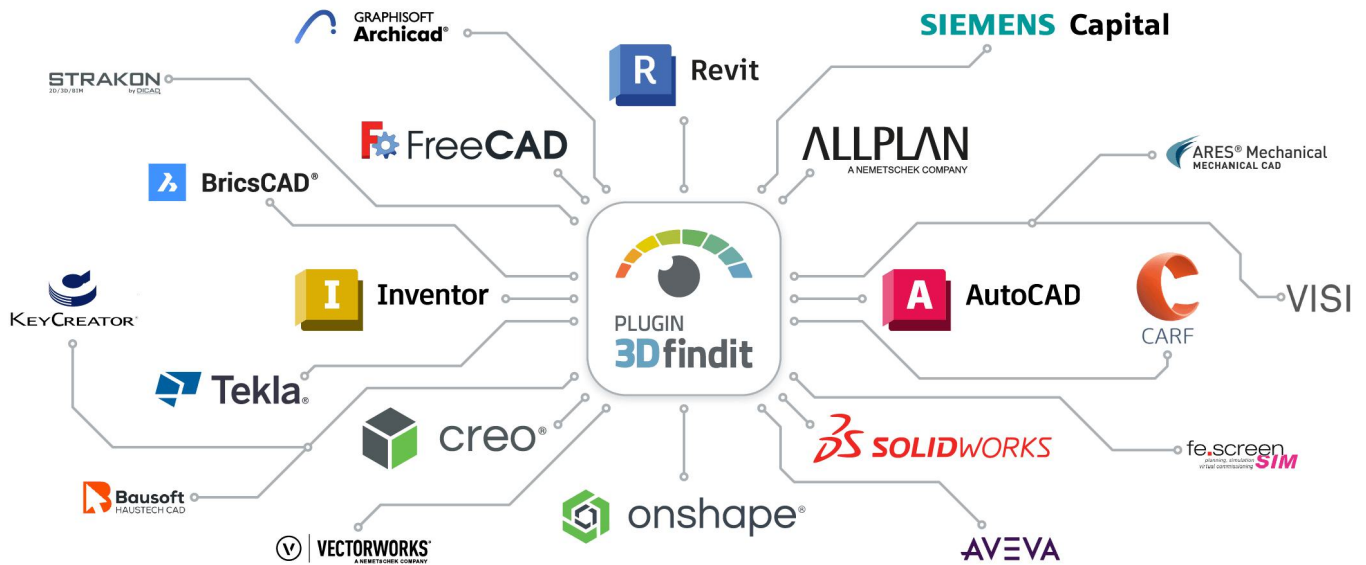

To the plugins