Ex. No: 03
Date: 27/7/26 CISCO PACKET TRACER


a) Analyse the behaviour of network device using CISCO PACKET TRACER Simulator.


1. From the network component box, click & drag-and-drop the below components.

   a. 4 Generic PCs & One HUB.
   b. 4 Generic PCs and One Switch


2. Click on Connections:

   *. click on copper straight-through cable
   *. Select one of the PC and connect it to HUB using the cable. The link LED should glow in green, indicating that the link it up. Similarly connect remaining 3 PCs to the HUB.
   *. Similarly connect 4 PCs to the switch using copper straight-through cable.

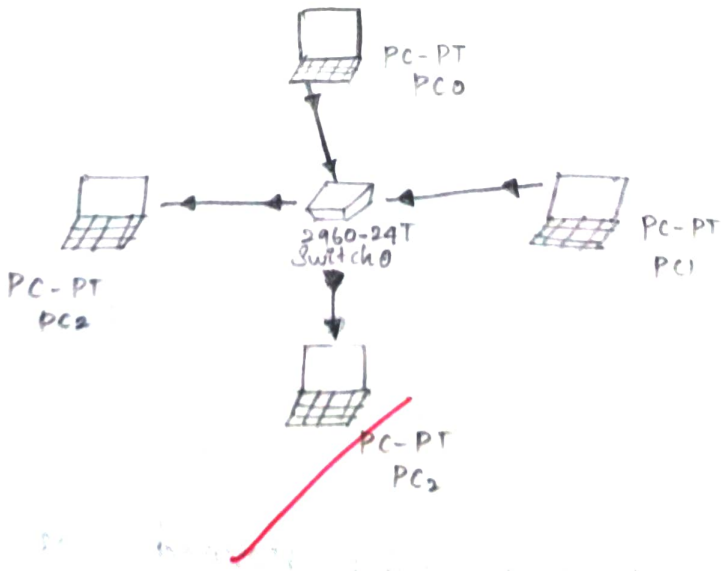


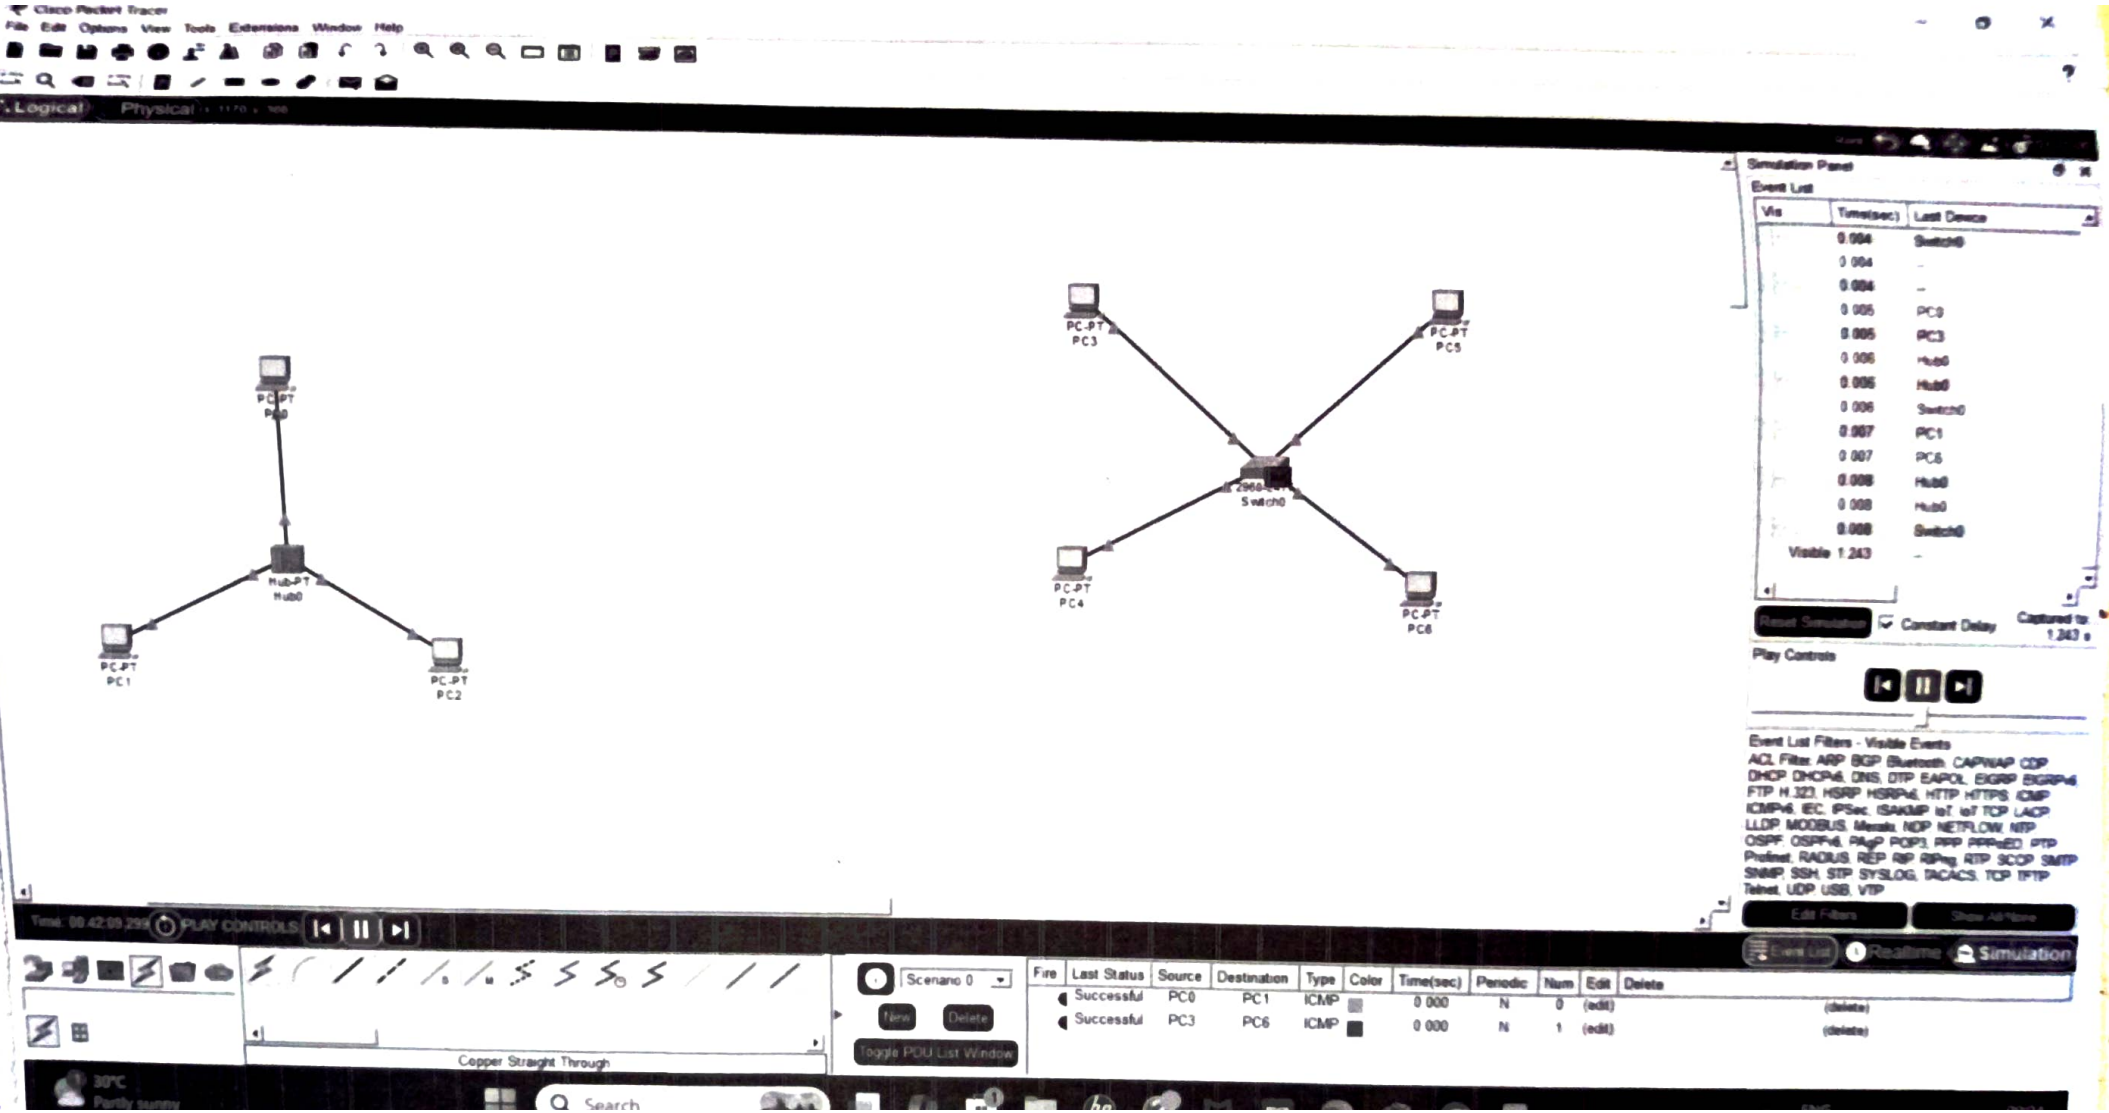

Cisco Packet Tracer are learned successfully

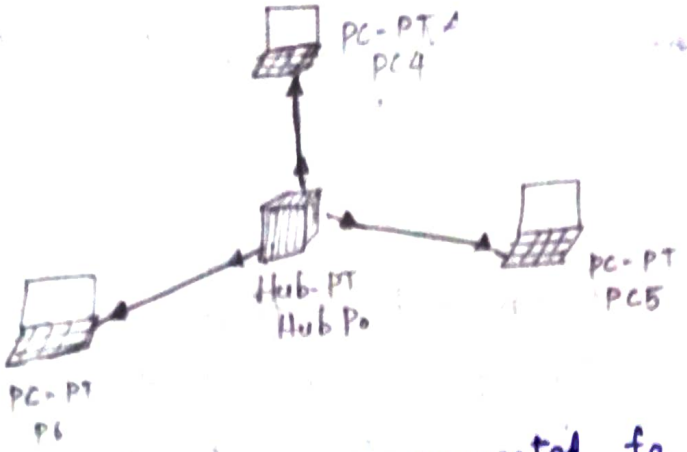

8. Click on the PCs connected to hub, go to the desktop tab, click on IP configuration, and enter an IP address and subnet mask. Here the default gateway and DNS Server information is not needed as there are only two end device in the network.

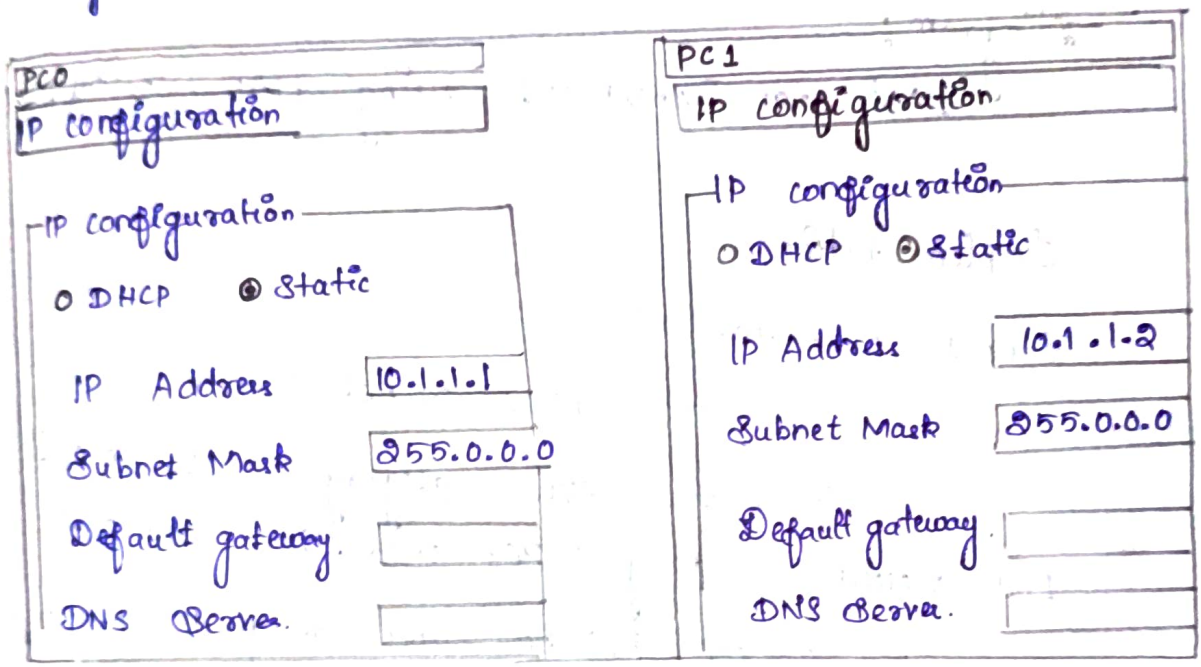

4. Click on the PDU from the common tool bar
   a. Drag & drop it on the PC and it on another PC connected to the HUB.

5. Observe the flow of PDU from source PC to destination PC by selecting the Realtime mode of simulation.

6. Repeat step #3 to step #5 for the PCs connected to the switch.

Result:

CISCO PACKET TRACER are learned & executed successfully