FLOOD WATER MANAGEMENT AND EARLY WARNING SYSTEM

INTERENT OF THINGS - PAHSE5 -GRUP1 - FINAL PROJECT

CLG NAME : Madha Istitute of Egineering and Technolgy

N.M ID : au211221205003

std name: Deepika.J

REG NO :211221205003

OBJECTIVES:

Risk Reduction: To minimize the risks associated with flooding and reduce the potential damage to human life, infrastructure, and the environment.

Public Safety: To protect the safety and well-being of the public by providing early warnings and guidance for evacuation or other protective actions.

Property Protection: To safeguard homes, businesses, and critical infrastructure from flood damage through early warnings and preparedness measures.

Environmental Protection: To minimize the negative environmental impacts of flooding, such as soil erosion and water pollution.

Economic Resilience: To enhance the economic resilience of communities by minimizing flood-related disruptions and economic losses.

Infrastructure Resilience: To ensure the resilience of critical infrastructure, such as bridges, dams, and transportation systems, to withstand flood events.

Timely Information: To provide timely and accurate information about flood events, including their magnitude, location, and potential impacts.

Community Preparedness: To promote community awareness and preparedness through education and outreach programs.

E ective Response: To support emergency response agencies and organizations with the information they need to coordinate and manage resources during a flood event.

Adaptive Management: To continuously improve flood water management strategies and early warning systems based on evolving technology and scientific knowledge.

Public Participation: To engage with the public and stakeholders in the development and improvement of flood water management and early warning systems.

Monitoring and Prediction: To monitor weather and hydrological conditions, predict flood events, and issue timely warnings to reduce the element of surprise and provide adequate lead time for preparations.

International Cooperation: To cooperate with neighboring countries and international organizations to manage transboundary rivers and mitigate flooding risks in a coordinated manner.

IOT DEVICE SETUP:

- **Water level sensors:** Measure water levels in rivers, streams, and flood-prone areas.
- **Rainfall and precipitation sensors:** Monitor precipitation to predict potential flooding.
- **Weather sensors:** Measure temperature, humidity, wind speed, and direction.
- **Soil moisture sensors:** Assess soil saturation levels.
- Connect the sensors to a data acquisition system.
- like **microcontroller, data logger, or IoT gateway** that collects data from the sensors.
- communication modules ex: cellular , wifi, LAN, Satellite etc.
- **Early warning system.**
- **Data processing and analysis.**
- **User interface.**
- **backup power.**
- **Remote Monitoring and Control.**
-

RESULTS AND ANALYSIS:

After all the complete connections of the system were made successfully along with the required software, the system was ready for testing. Individual models were tested at the beginning of the project. The system was tested for analyzing the various parameters such as temperature, humidity and level of water.

Time	DHT11 (in celsius)	Thermometer (in celsius)
6:00 AM	21	22
7:00 AM	21	22
8:00 AM	21	22
9:00 AM	23	24
10:00 AM	25	26
11:00 AM	26	26
3:00 PM	28	28
4:00 PM	24	25
5:00 PM	24	25
6:00 PM	22	23
7:00 PM	23	24
8:00 PM	23	24
9:00 PM	23	24
10:00 PM	23	24
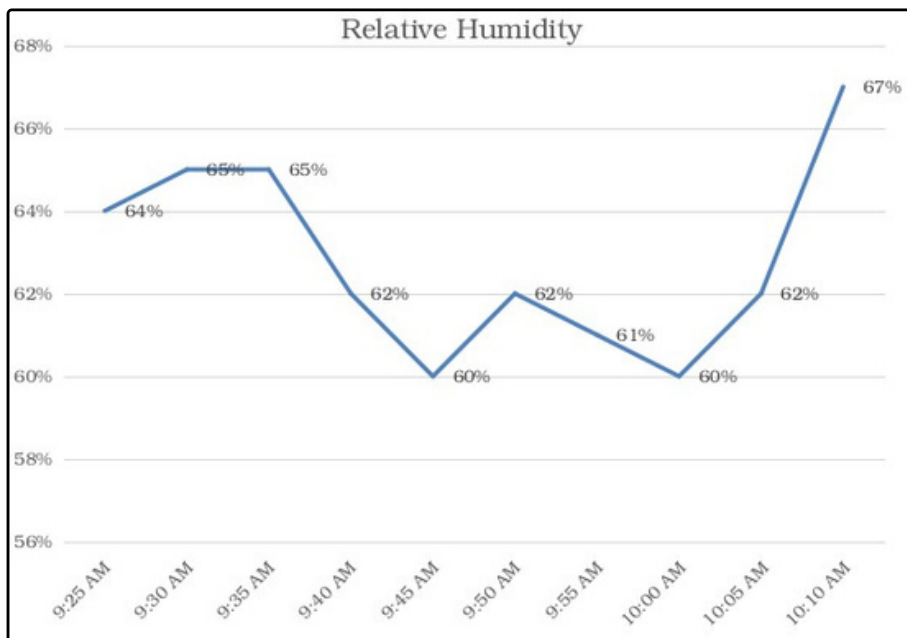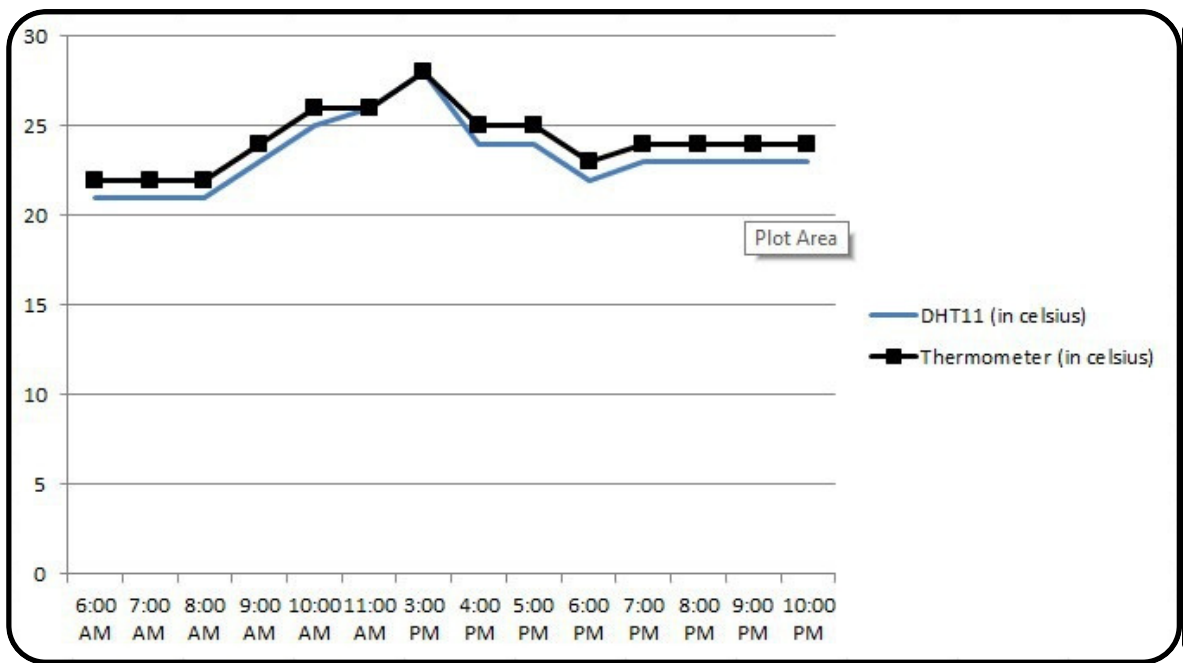
LIMIATIONS:

As no any machine can be perfect and this line also a ect out project as well. Desired output was observed. The system designed has the following limitation:

DHT11 sensor can measure the temperature only from 0-50 degree Celsius and cannot operate on lower or higher range of temperature than this.

DHT11 sensor can measure the humidity only from 20-95% RH and hence cannot operate on lower or higher range than this.

HC-SR04 (Ultrasonic sensor) has the maximum range of only 400 centimeters.

The web API delays sometime to deliver the SMS.

```html
<!DOCTYPE html>
<html lang="en">
<head>
 <meta charset="UTF-8">
 <meta name="viewport" content="width=device-width, initial-scale=1.0">
 <title>Flood Management & Early Warning System</title>
 <style>
 /* Reset some default styles */
 * {
 margin: 0;
 padding: 0;
 box-sizing: border-box;
 }
 /* Basic styling for the body */
 body {
 font-family: Arial, sans-serif;
 background-color: #f0f0f0;
 margin: 20px;
 }
 /* Header styling */
 header {
 background-color: #0074D9;
 color: #fff;
 padding: 20px;
 text-align: center;
 }
 /* Main content container */
 .container {
 max-width: 1200px;
 margin: 0 auto;
 padding: 20px;
 background-color: #fff;
 }
 /* Footer styling */
 footer {
 background-color: #333;
 color: #fff;
 text-align: center;
 padding: 10px;
 }
 </style>
</head>
<body>
 <header>
 <h1>Flood Management & Early Warning System</h1>
 </header>
 <div class="container">
 <!-- Your content goes here -->
 <h2>Welcome to our Flood Management System</h2>
 <p>This is a basic template. You can add more content and functionality as needed.</p>
 </div>
 <footer>
 &copy; 2023 Your Organization
 </footer>
</body>
</html>
```

CODE FOR APLICATION IN PYTHON FOR THE ABOVE TECHNOLOGY:

1.We simulate the acquisition of environmental data, such as water level and rainfall.
In
a real system, you would replace with actual sensor data or data from external sources.

2.We analyze the acquired data to issue warnings based on predefined criteria.
This is a simplified warning system; in a practical application, you would use more
advanced algorithms and possibly integrate machine learning for prediction.

3.The code runs in a loop, continually acquiring and analyzing data, and issuing warnings.

```python
# Import necessary libraries
import random
import time
from datetime import datetime

# Simulate a data acquisition process (replace with real data sources)
def acquire_environmental_data():
 water_level = random.uniform(1.0, 10.0) # Simulated water level
 rainfall = random.uniform(0.0, 5.0) # Simulated rainfall
 return water_level, rainfall

# Analyze environmental data and issue warnings if necessary
def analyze_data(water_level, rainfall):
 if water_level > 7.0:
 return "High risk of flooding. Take immediate action."
 elif water_level > 5.0:
 return "Moderate risk of flooding. Prepare for possible evacuation."  elif
rainfall > 3.0:
 return "Heavy rainfall. Keep a close watch on water levels."
 else:
 return "No immediate threat. Stay alert."

# Main application loop
while True:
 water_level, rainfall = acquire_environmental_data()
 timestamp = datetime.now().strftime('%Y-%m-%d %H:%M:%S')

# Analyze data and issue warnings
 warning = analyze_data(water_level, rainfall)

# Display the results
 print(f"Timestamp: {timestamp}")
 print(f"Water Level: {water_level:.2f} meters")
 print(f"Rainfall: {rainfall:.2f} mm/hour")
 print(f"Warning: {warning}\n")

# Simulate data acquisition interval (e.g., every 15 minutes)
 time.sleep(900)
```
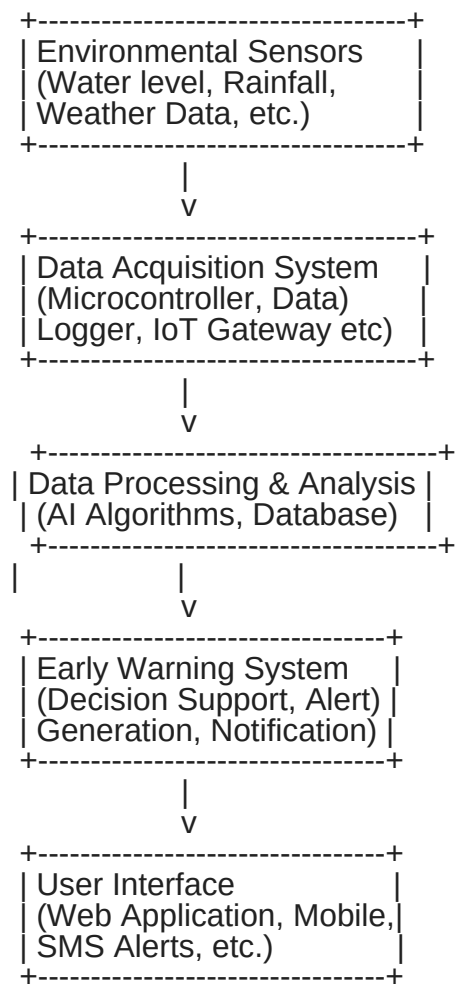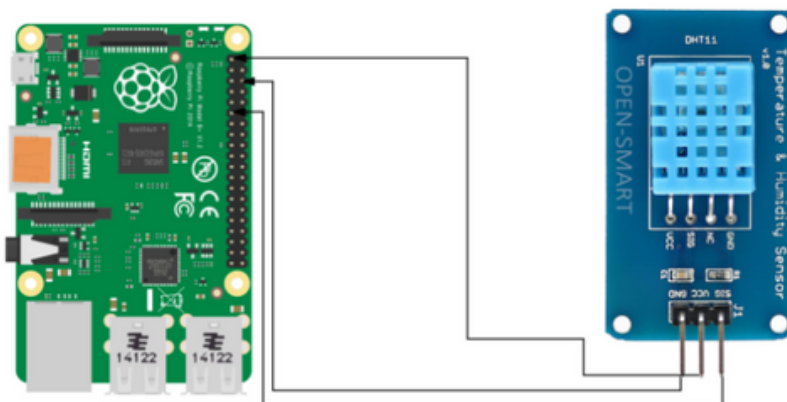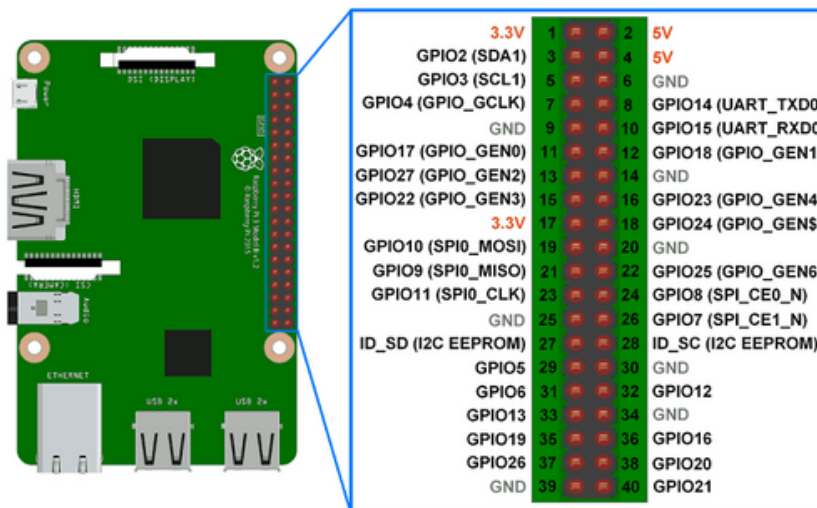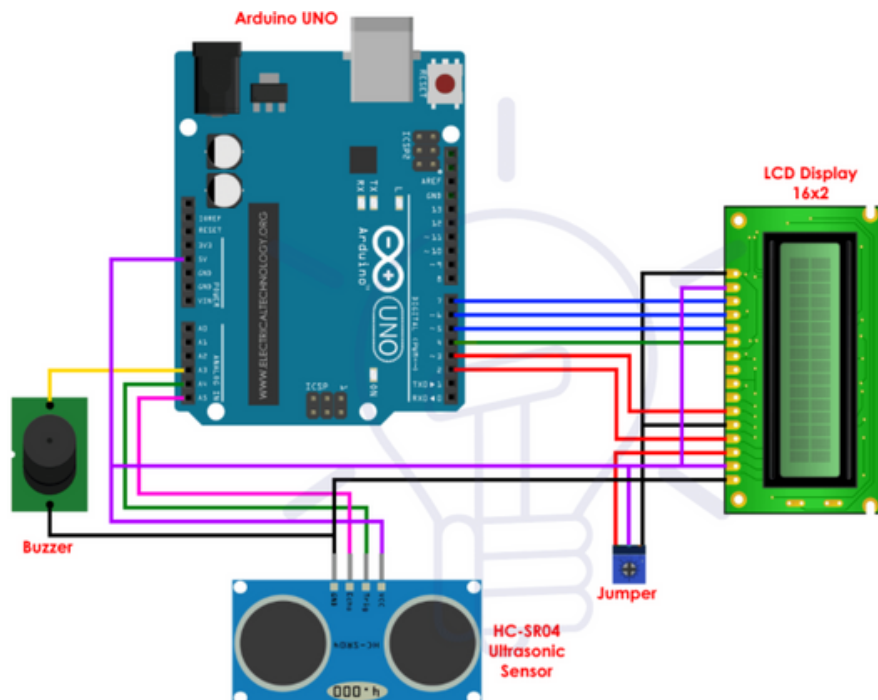
1. **Timely Alerting**: The system continuously monitors environmental parameters, such as water levels, rainfall, and weather conditions. When these parameters indicate the possibility of a flood, the system can issue timely alerts to the public. This early warning allows people to take preventive measures, such as evacuating to safer areas or safeguarding their property, reducing the risk to their lives and belongings.

2. **Evacuation Planning**: Early warnings provide communities and local authorities with time to plan and execute evacuation procedures. It allows them to identify high-risk areas and routes for evacuation, ensuring a smooth and orderly process. Residents can also prepare emergency kits and gather essential supplies.

3. **Resource Allocation**: Emergency response agencies can allocate resources more effectively and efficiently. They can mobilize personnel, equipment, and supplies to the areas most likely to be affected by flooding. This proactive approach minimizes response time and maximizes the impact of rescue and relief efforts.

4. **Reduced Casualties**: By providing advanced notice of potential floods, the system helps people avoid risky situations and make informed decisions. This, in turn, reduces the number of casualties and injuries during flood events.

5. **Community Awareness**: A real-time monitoring system increases public awareness about flood risks and the importance of preparedness. When people are well-informed, they are more likely to take the necessary precautions to protect themselves and their property.

6. **Data-Driven Decision-Making**: The system provides decision-makers with real data and historical information, enabling them to make data-driven   information helps authorities understand the severity and extent of a flooding respond accordingly.

7. **Coordination among Agencies**: Different emergency response agencies, such as police, fire departments, and local government organizations, can collaborate more effectively. They can share critical information and coordinate their efforts to respond to flood events comprehensively.

8. **Public Communication**: The system enables authorities to communicate with the public through various channels, such as mobile apps, SMS, and social media. channels help disseminate information, updates, and safety instructions to a wide audience rapidly.

9. **Rescue Operations**: Real-time flood monitoring aids in identifying the locations of individuals who may be trapped or in distress. Rescue teams can prioritize their efforts and navigate to those areas with higher precision.

```
+-----------------------------------+
| Environmental Sensors             |
| (Water level, Rainfall,           |
| Weather Data, etc.)               |
+-----------------------------------+
                 |
                 V
+-----------------------------------+
| Data Acquisition System           |
| (Microcontroller, Data)           |
| Logger, IoT Gateway etc)          |
+-----------------------------------+
                 |
                 V
+-------------------------------------+
| Data Processing & Analysis |
| (AI Algorithms, Database)   |
+-------------------------------------+
    |            |
                 V
+---------------------------------+
| Early Warning System    |
| (Decision Support, Alert) |
| Generation, Notification) |
+---------------------------------+
                 |
                 V
+---------------------------------+
| User Interface          |
| (Web Application, Mobile,|
| SMS Alerts, etc.)        |
+---------------------------------+
```

1. Environmental Sensors: These sensors monitor various environmental parameters, including water level, rainfall, and weather data.
2. Data Acquisition System: This component collects data from the sensors. It can include microcontrollers, data loggers, or IoT gateways to transmit data to a central system.
3. Data Processing & Analysis: The acquired data is processed and analyzed, often using AI algorithms. The analysis may include historical data for trend analysis and predictive modeling.
4. Early Warning System: This system uses the analyzed data to make decisions and generate alerts or warnings. It decides when to issue warnings based on predefined criteria.
5. User Interface: The system provides a user-friendly interface for both the public and authorities. Users can access real-time flood information, warnings, and safety instructions through web applications, mobile apps, or SMS alerts.

Arduino UNO

LCD Display 16x2

Buzzer

Jumper

HC-SR04 Ultrasonic Sensor

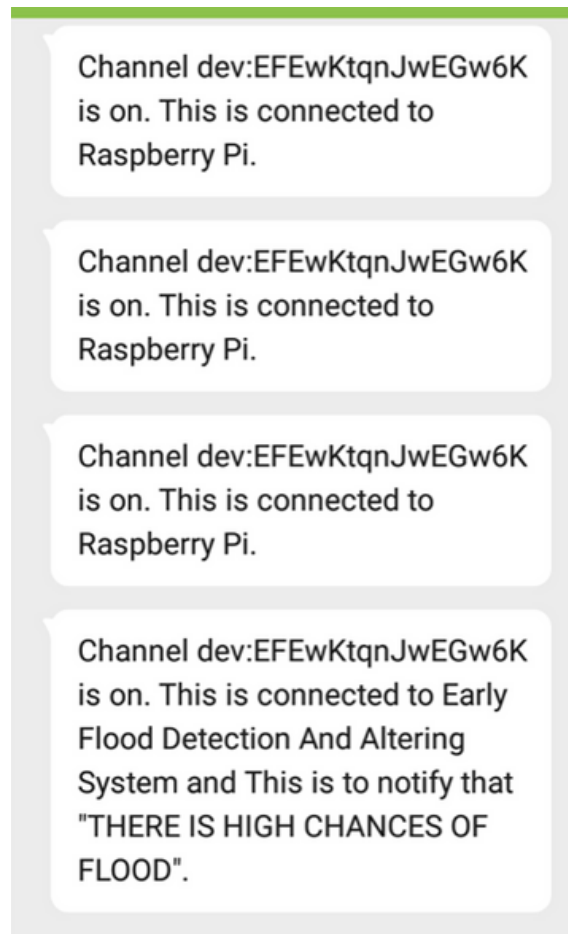|			
3.3V	1	2	5V
GPIO2 (SDA1)	3	4	5V
GPIO3 (SCL1)	5	6	GND
GPIO4 (GPIO_GCLK)	7	8	GPIO14 (UART_TXD0)
GND	9	10	GPIO15 (UART_RXD0)
GPIO17 (GPIO_GEN0)	11	12	GPIO18 (GPIO_GEN1)
GPIO27 (GPIO_GEN2)	13	14	GND
GPIO22 (GPIO_GEN3)	15	16	GPIO23 (GPIO_GEN4)
3.3V	17	18	GPIO24 (GPIO_GEN$)
GPIO10 (SPI0_MOSI)	19	20	GND
GPIO9 (SPI0_MISO)	21	22	GPIO25 (GPIO_GEN6)
GPIO11 (SPI0_CLK)	23	24	GPIO8 (SPI_CE0_N)
GND	25	26	GPIO7 (SPI_CE1_N)
ID_SD (I2C EEPROM)	27	28	ID_SC (I2C EEPROM)
GPIO5	29	30	GND
GPIO6	31	32	GPIO12
GPIO13	33	34	GND
GPIO19	35	36	GPIO16
GPIO26	37	38	GPIO20
GND	39	40	GPIO21

some components augmenattion and their setup screenshots are given above

DISCUSSION AND CONCLUSION :

Finally, it is concluded that, the system can detect and hypothesize the flood earlier. The project is based on embedded system and close loop control system. System consists of hardware and software applications to detect water level of rivers, dams etc. System automatically detects the change in level of water and alerts the system when it crosses the threshold value(less than 20cm). The system include ultrasonic sensor to detect the rise in water level and alert if distance between water and sensor is less than 20 cm. DHT11 sense the temperature and humidity which help to analysis the environmental factor for flooding. If the water level crosses the threshold value than Raspberry pi turns the buzzer and led turn on which symbolizes the warning for early flood.

SAMPLE APPLICATION'S ALERT MESSAGES:

Channel dev:EFEwKtqnJwEGw6K is on. This is connected to Raspberry Pi.

Channel dev:EFEwKtqnJwEGw6K is on. This is connected to Raspberry Pi.

Channel dev:EFEwKtqnJwEGw6K is on. This is connected to Raspberry Pi.

Channel dev:EFEwKtqnJwEGw6K is on. This is connected to Early Flood Detection And Altering System and This is to notify that "THERE IS HIGH CHANCES OF FLOOD".

The flowchart , block diagram ,python code , integrated components and its construction and working have been discussed and submitted in the prior project phases submitted.

team members:
1.211221205001 2.211221205002 3.211221205003
4.211221205004 5.211221205005 6.211221205006