




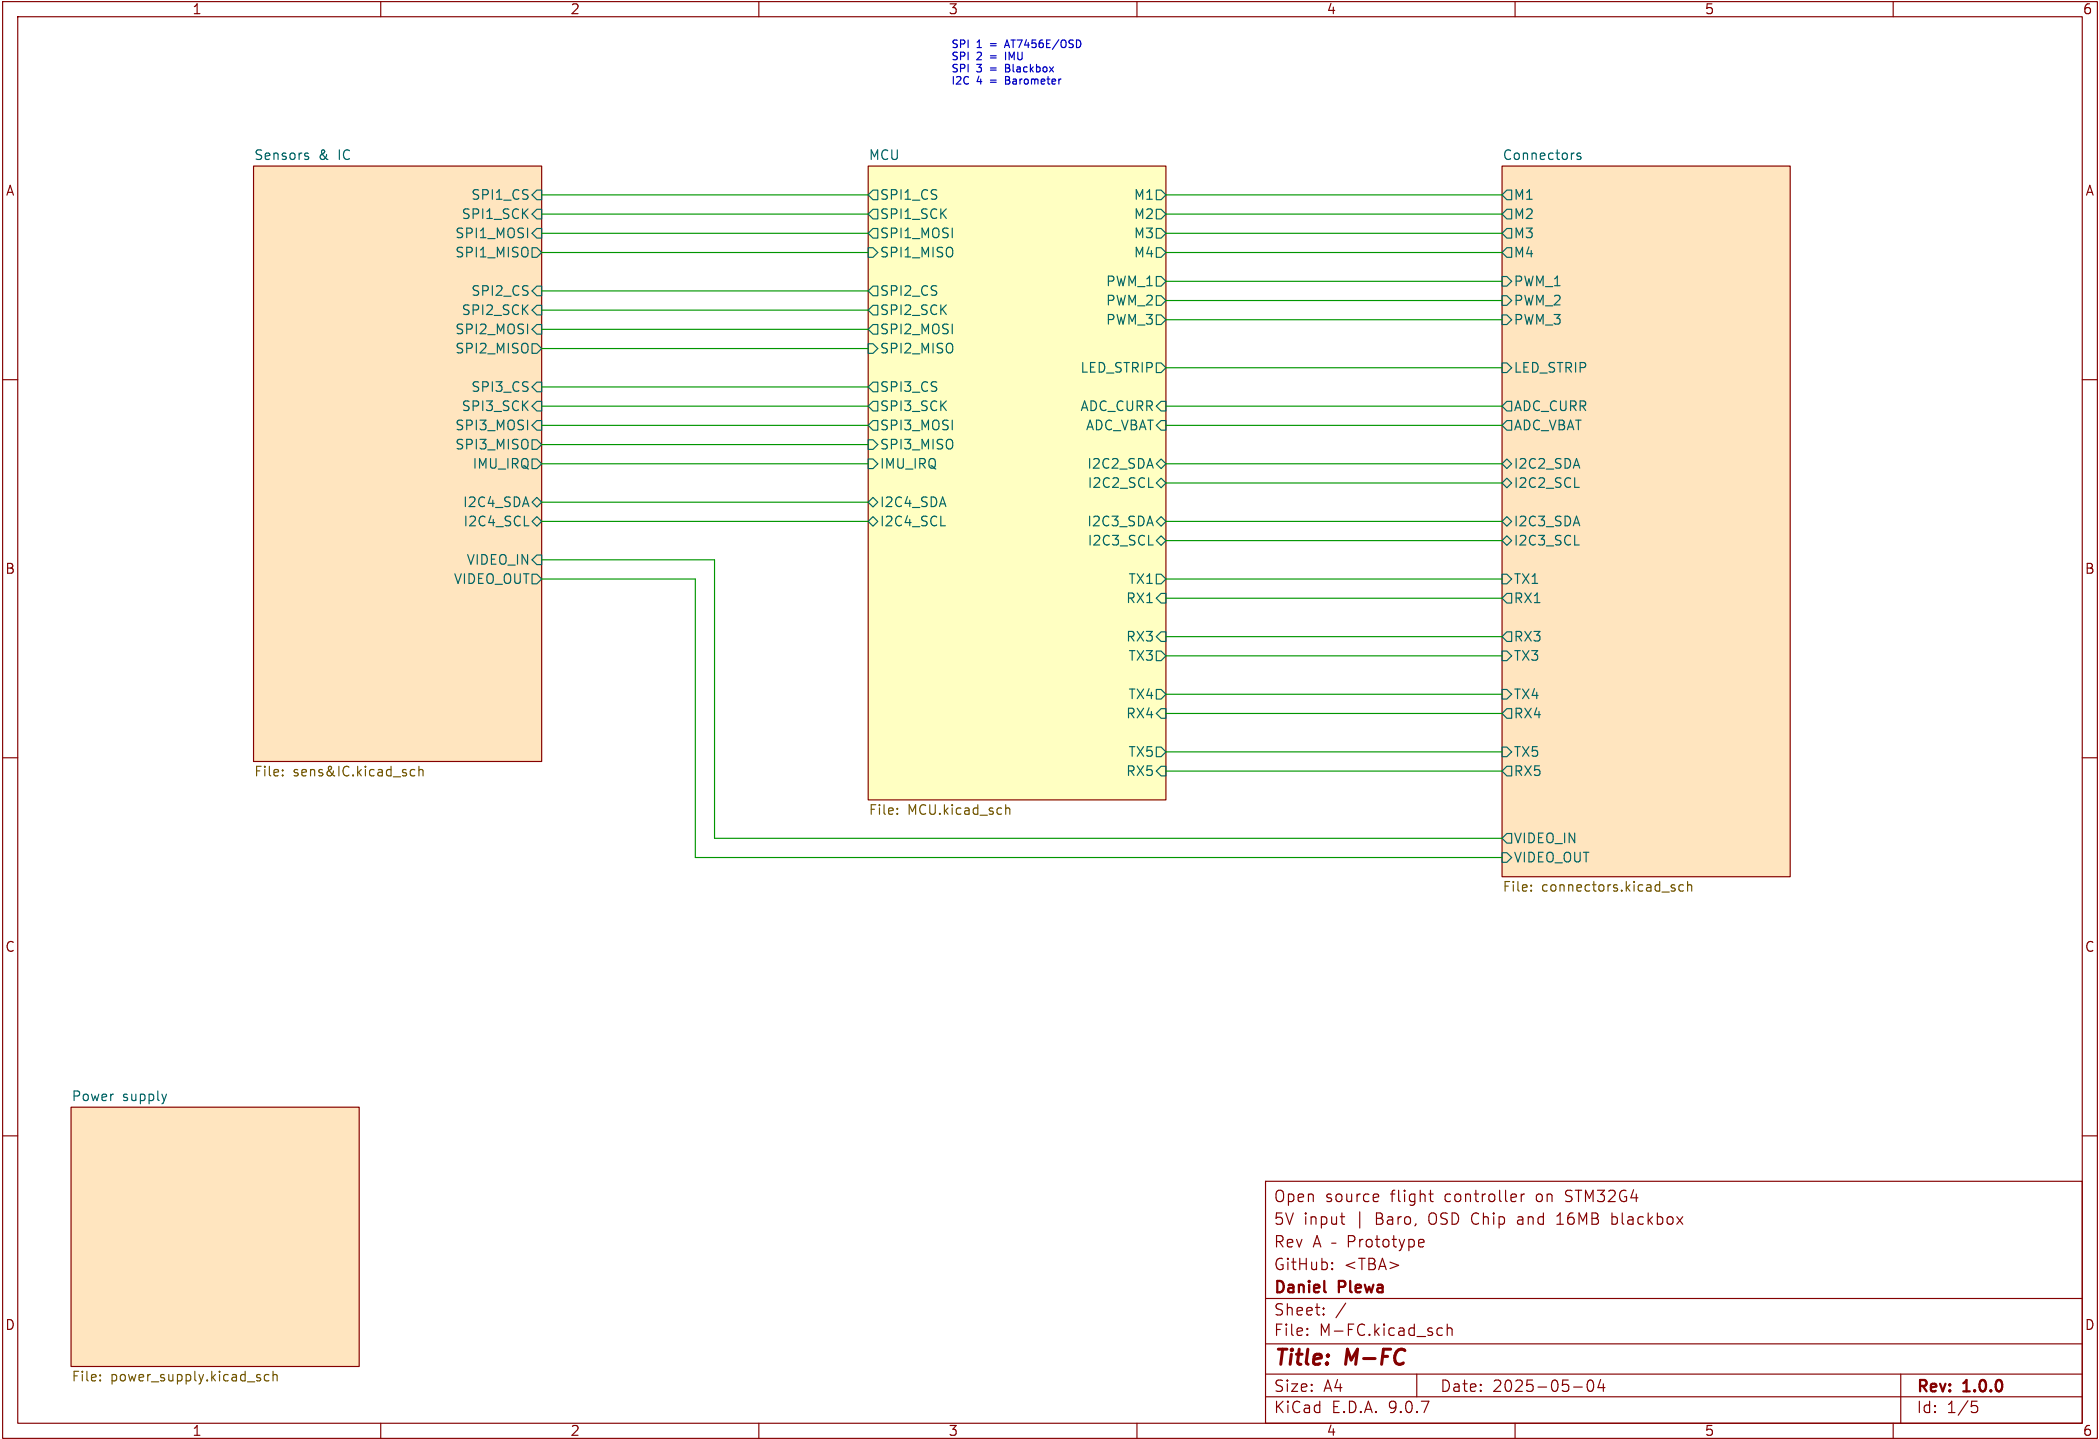


## OSD

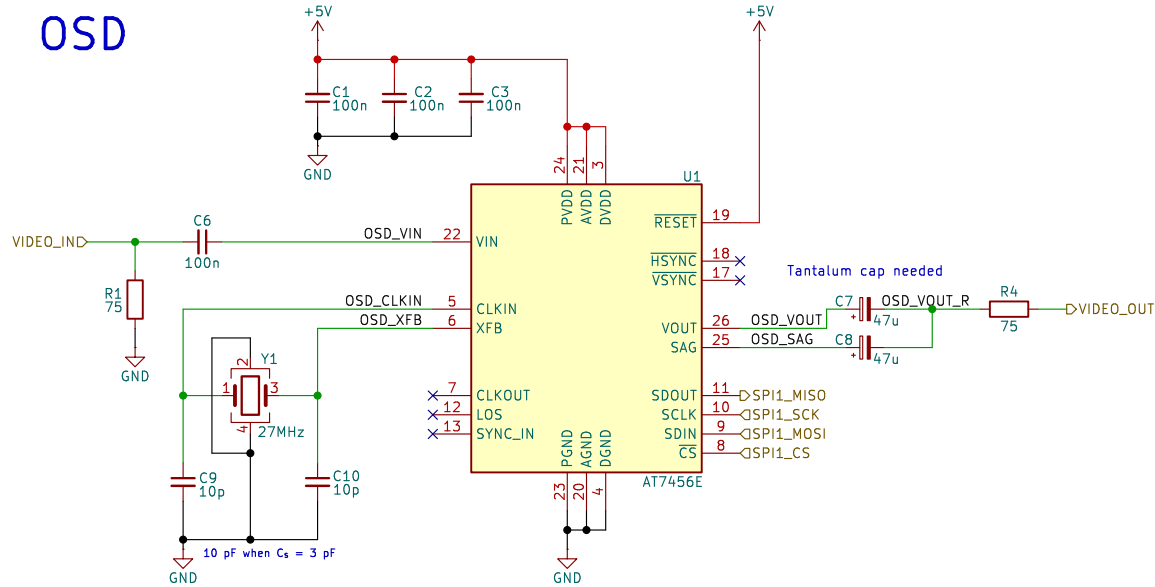


## Baro

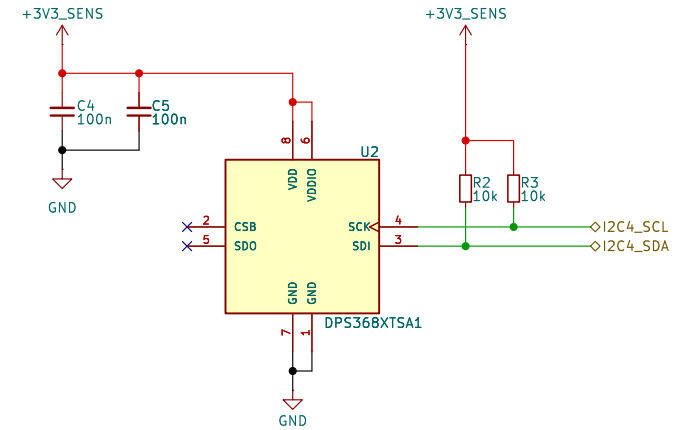

## IMU

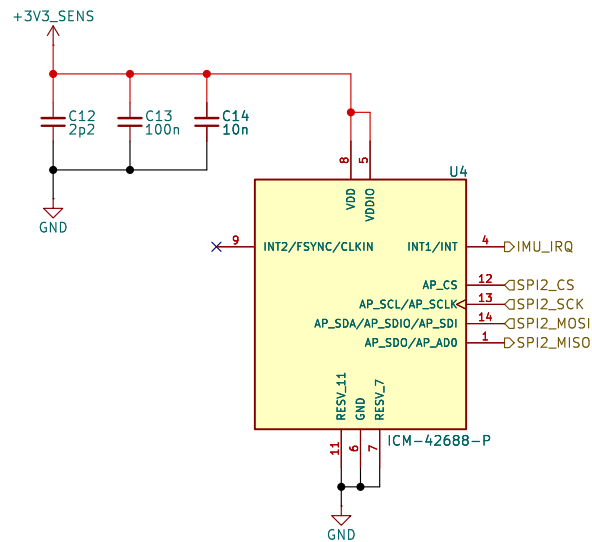

## Blackbox

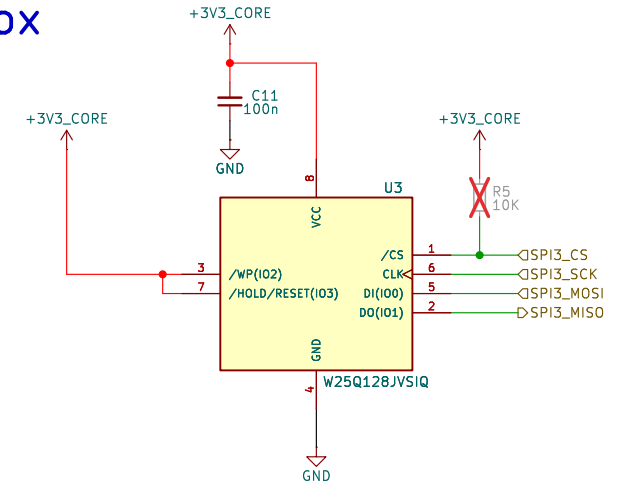

Open source flight controller on STM32G4  
5V input | Baro, OSD Chip and 16MB blackbox  
Rev A - Prototype  
GitHub: <TBA>

**Daniel Plewa**

Sheet: /Sensors & IC/  
File: sens&IC.kicad\_sch

**Title: M-FC**

Size: A4 Date: 2025-05-04


KiCad E.D.A. 9.0.7

**Rev: 1.0.0**

Id: 2/5

Buck converter  
5V 2.5A


Power Path  
5V\_UNFLT -> 5V\_REG -> 5V -> 3V3\_CORE  
USB -> VBUS -> 3V3\_SENS

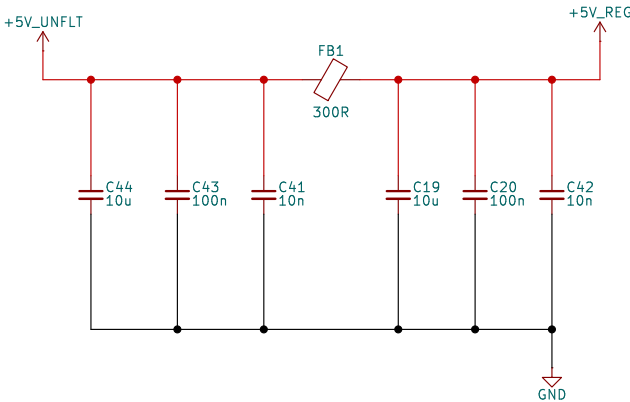

Main power source

Design and CAP size (Off-board Buck: 5V 2.5A M-PDB)  
<https://webench.ti.com/appinfo/webench/scripts/SDP.cgi?ID=45EB5F2F9E19CD80>


LDO  
3V3 500mA

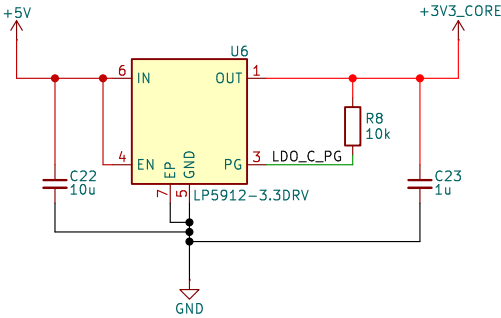

LDO 3.3V for MCU and Blackbox

Design  
<https://webench.ti.com/appinfo/webench/scripts/SDP.cgi?ID=F7ED04D030C13C86>


LDO  
3V3 500mA

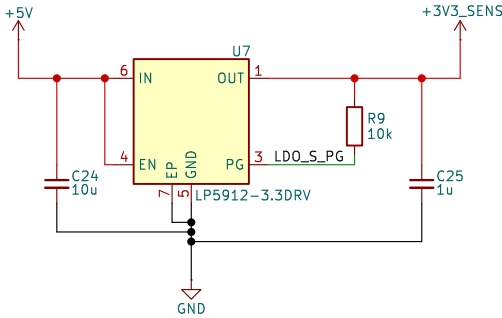

LDO 3.3V for IMU and Baro

Design  
<https://webench.ti.com/appinfo/webench/scripts/SDP.cgi?ID=F7ED04D030C13C86>

Power switch



Open source flight controller on STM32G4  
5V input | Baro, OSD Chip and 16MB blackbox  
Rev A - Prototype  
GitHub: <TBA>

**Daniel Plewa**  
Sheet: /Power supply/  
File: power\_supply.kicad\_sch

**Title: M-FC**

Size: A4 Date: 2025-05-04

KiCad E.D.A. 9.0.7

Rev: 1.0.0

Id: 3/5

