



AMT

INFRA SOLUTIONS

SAFETY BEYOND STANDARDS



TOTAL SECURITY & ENGINEERING SOLUTIONS

PRODUCT & SERVICE CATALOGUE



Rolling Shutters

Motorized & manual heavy duty security barriers for commercial logistics hubs.



Fire Rated Doors

Certified structural assemblies providing up to 120-180 minutes of fire containment.



Specialized Doors

Acoustic soundproofing, radiation lead-lined, and cleanroom hermetic openings.



Building Solutions

Premium steel, UPVC frame window systems, and power utility generator acoustic enclosures.

WHO WE ARE & WHAT WE DELIVER

AMT Infra Solutions is an industry-leading manufacturer, supplier, and installer of high-performance architectural openings and security systems.

Through precision design engineering, our systems safeguard high-value industrial facilities, pharmaceutical laboratories, commercial warehouses, and corporate complexes nationwide.

Our Quality Promise

Every door, window, and security barrier is built to exceed strict regulatory fire, sound mitigation, and radiation safety codes. We prioritize life safety and physical structural protection above all else.

"Our unwavering commitment is to engineer structural products that safeguard human life and high-value infrastructure assets without compromise."

— **Melvin Prabu, Sales & Operations, AMT Infra Solutions**






ROLLING SHUTTERS

HEAVY DUTY SECURITY BARRIERS



DETAIL: 3D ROLLING SHUTTER

Scale: 1:25

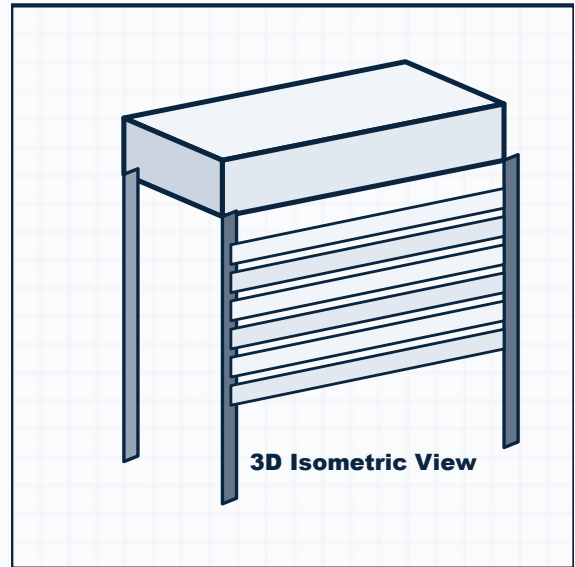

DRN: AMT-ENG

DWG NO: AMT-RS-3D

Technical Specifications

MATERIALS

Galvanized Iron (GI) or Galvalume interlocking cold-rolled steel slats. Slat thickness: 0.8mm to 1.2mm.

OPERATION MODE

Motorized (lateral side-motor or central tubular motor) with manual chain override and remote controller.

GUIDE RAILS

Heavy-duty wind-resistant guides with rubber weather-seals and double-angle base bar.

BEST APPLICATIONS

- ✓ Logistics Hubs
- ✓ Warehouses
- ✓ Showrooms
- ✓ Loading Bays




UPVC DOORS & WINDOWS

ARCHITECTURAL FINISH & INSULATION



DETAIL: 3D WINDOW PROFILE

Scale: 1:5

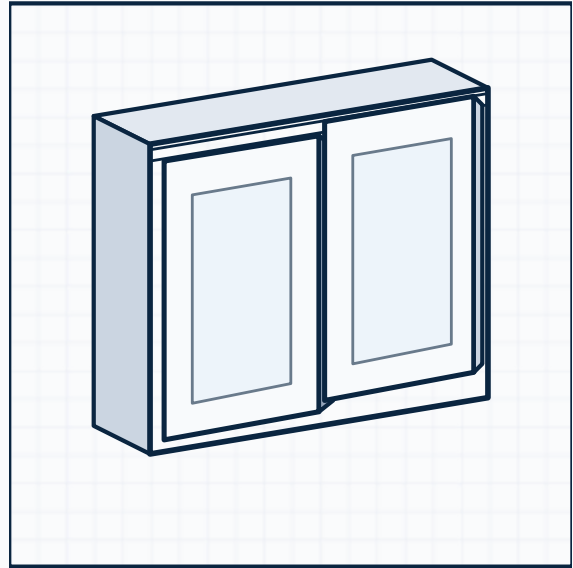

DRN: AMT-ENG

DWG NO: AMT-UP-3D

Technical Specifications

PROFILE STRUCTURE

Multi-chambered structural vinyl profiles reinforced with internal galvanized steel.

GLAZING OPTIONS

Double or triple insulated glass unit (IGU) with low-E coating and argon gas fill.

PERFORMANCE

Thermal insulation (U-value < 1.6 W/m²K) and acoustic damping up to STC 40+.

BEST APPLICATIONS

- ✓ Residential Homes
- ✓ High-rise Buildings
- ✓ Offices
- ✓ Hospitals




FIRE RATED DOORS

CERTIFIED LIFE SAFETY EQUIPMENT



DETAIL: 3D CORE CUTAWAY

Scale: 1:20

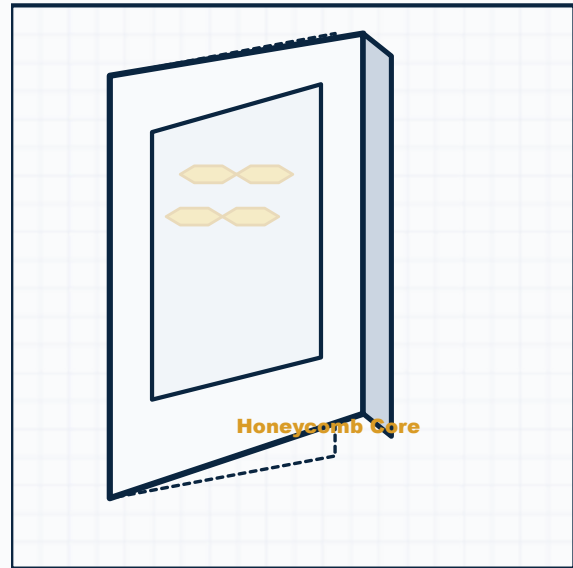

DRN: AMT-ENG

DWG NO: AMT-FD-3D

Technical Specifications

FIRE RESISTANCE

120 to 180 minutes structural integrity and thermal containment (CBRI certified).

INFILL CORE

Structural honeycomb core insulation to guarantee structural rigidity and flat surface finish.

PERIMETER SEAL

Expanding intumescent seals that activate under heat to block smoke, gas, and fire.

BEST APPLICATIONS

- ✓ Staircase Exits
- ✓ Server Rooms
- ✓ Electrical Shafts
- ✓ Industrial Exitways




CLEAN ROOM DOORS

AIRTIGHT HERMETIC CONTAINMENT



DETAIL: 3D HERMETIC DOOR

Scale: 1:20

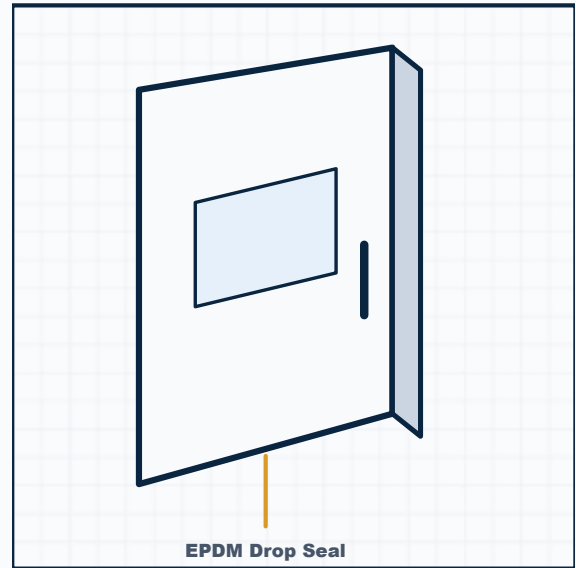

DRN: AMT-ENG

DWG NO: AMT-CD-3D

Technical Specifications

MATERIALS

Galvanized steel skin (GPSP) with chemical resistant, anti-microbial epoxy powder coating.

HERMETIC GASKETS

Flush-mounted 4-sided EPDM weather gaskets with bottom drop-down seal mechanics.

INTEGRATION

Door status sensors for magnetic interlocking systems in cleanroom airlocks.

BEST APPLICATIONS

- ✓ Pharmaceutical Labs
- ✓ Semiconductor Fab
- ✓ Biotech Research
- ✓ Airlock Entrances




HOSPITAL OT DOORS

OPERATING THEATRE ENTRY SYSTEMS



DETAIL: 3D SLIDING OT DOOR

Scale: 1:25

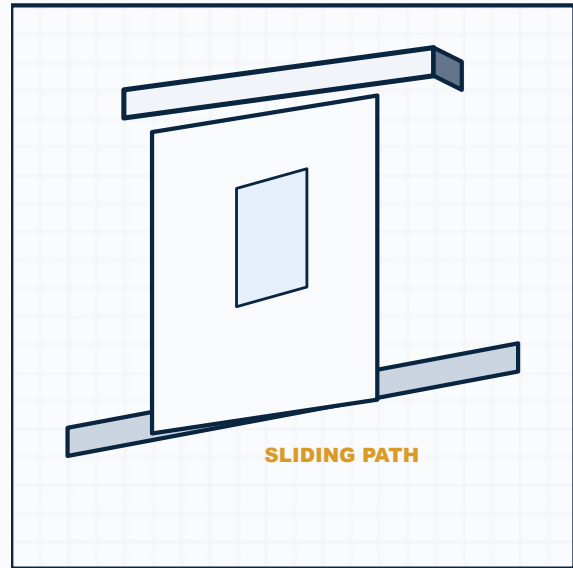

DRN: AMT-ENG

DWG NO: AMT-OT-3D

Technical Specifications

MECHANISM

Sliding or swinging system. Smooth wall track with automated sensor or elbow switch.

SURFACE FINISH

SS304 or high pressure laminate. Highly resistant to surgical chemical disinfectants.

HYGIENE

Completely flush outer structure, zero crevices to prevent bacterial/microbial nesting.

BEST APPLICATIONS

- ✓ Operating Rooms
- ✓ ICU Entrances
- ✓ Surgical Corridors
- ✓ Isolation Wards




STAINLESS STEEL DOORS

HEAVY DUTY ARCHITECTURAL SECURITY



DETAIL: 3D SS DOOR LEAF

Scale: 1:20

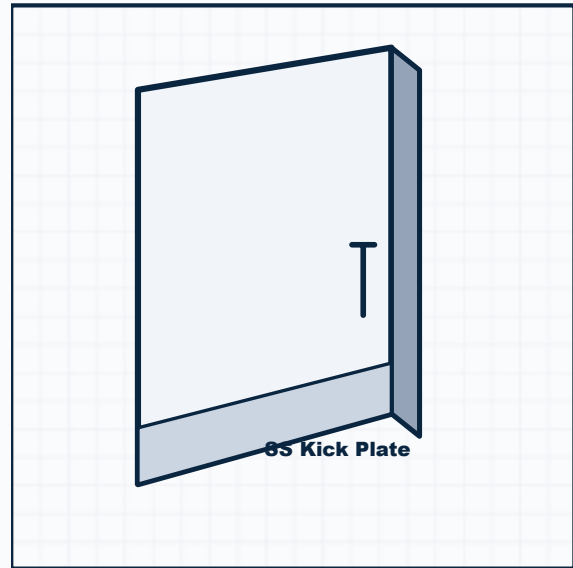

DRN: AMT-ENG

DWG NO: AMT-SS-3D

Technical Specifications

ALLOY GRADE

Premium SS304 or SS316 grade stainless steel sheet (0.8mm to 1.2mm shutter skins).

STRUCTURE INFILL

Dense Honeycomb, Polyurethane Foam (PUF), or mineral Rockwool core sandwich.

FINISH OPTIONS

Hairline brushed, mirror polished, or satin finish for premium modern look.

BEST APPLICATIONS

- ✓ Commercial Kitchens
- ✓ Food Processing
- ✓ Chemical Plants
- ✓ Hospitals




LEAD LINED DOORS

RADIATION SHIELDING SYSTEMS



DETAIL: 3D LEAD SANDWICH

Scale: None

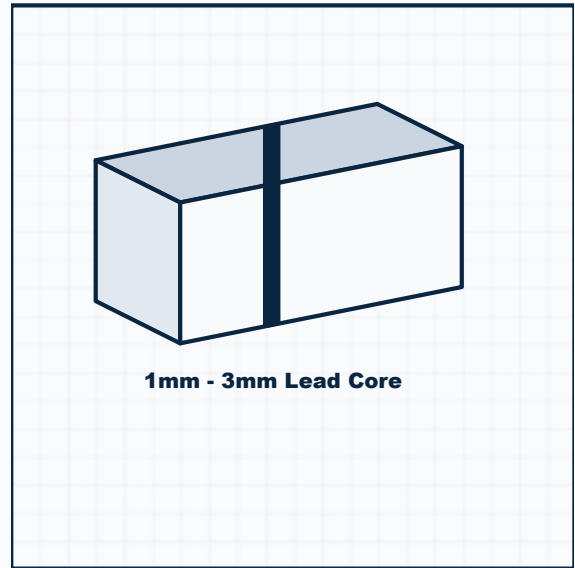

1mm - 3mm Lead Core

DRN: AMT-ENG

DWG NO: AMT-LL-3D

Technical Specifications

SHIELDING CORE

Continuous pure lead sheeting (1mm to 3.0mm thick) layered inside the door and frame.

CONSTRUCTION

High-density solid core sandwich style.
Heavy steel or wood skins with lead lining.

HARDWARE

Heavy-duty pivot hinges designed to bear extreme structural weight (up to 200+ kg).

BEST APPLICATIONS

- ✓ X-Ray Diagnostics
- ✓ CT Scan Suites
- ✓ Nuclear Medicine
- ✓ Radiation Labs




EMERGENCY EXIT DOORS

EGRESS & LIFE SAFETY BARRIERS



DETAIL: 3D DOUBLE EXIT DOOR Scale: 1:25

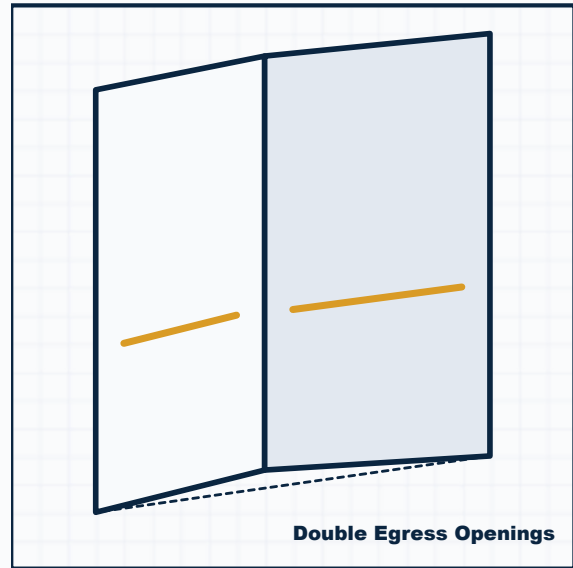

DRN: AMT-ENG

DWG NO: AMT-EE-3D

Technical Specifications

COMPLIANCE

Meets strict NBC (National Building Code) and international egress safety requirements.

HARDWARE SYSTEM

Heavy-duty UL-listed panic bar / crash bar mechanism for swift outward egress.

ACOUSTICS & SEALS

Integrated perimeter smoke seals, auto door coordinators, and threshold expansion strips.

BEST APPLICATIONS

- ✓ Public Corridors
- ✓ Cinema Halls
- ✓ Shopping Malls
- ✓ Staircase Wells




ACOUSTIC DOORS

SOUND MITIGATION & NOISE CONTROL



DETAIL: 3D COMPRESSION SEAL Scale: None

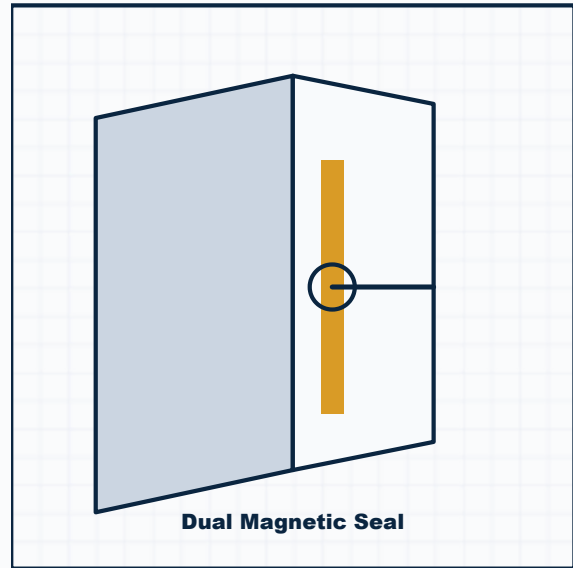

Dual Magnetic Seal

DRN: AMT-ENG

DWG NO: AMT-AD-3D

Technical Specifications

ACOUSTIC RATING

Sound Transmission Class (STC) rating of 40dB to 52dB+ attenuation range.

DOOR CORE INFILL

Multi-layered acoustic damping sheets and mineral wool sound absorption core.

SEALS CONFIGURATION

Heavy-duty magnetic perimeter compression gaskets with auto threshold drop seals.

BEST APPLICATIONS

- ✓ Recording Studios
- ✓ Conference Rooms
- ✓ Generator Rooms
- ✓ Auditoriums




DOUBLE LEAF DOORS

WIDE OPENING SECURITY ASSEMBLIES



DETAIL: 3D ACTIVE/INACTIVE LEAVES

Scale:
1:25

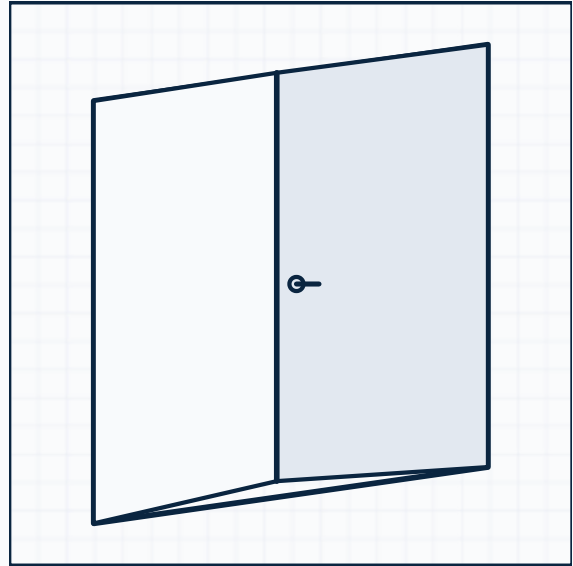

DRN: AMT-ENG

DWG NO: AMT-DL-3D

Technical Specifications

CONFIGURATION

Double leaf (active/inactive leaves) with built-in rebate profiles for secure overlap sealing.

INACTIVE LEAF SECURITY

Top and bottom flush bolts (manual or automatic self-latching) on the inactive leaf.

INFILL OPTION

Honeycomb, polyurethane foam (PUF), or mineral Rockwool depending on architectural fire rating.

BEST APPLICATIONS

- ✓ Main Entrances
- ✓ Hospital Corridors
- ✓ Logistics Hubs
- ✓ Auditoriums




FULLY GLAZED DOORS

MODERN GLASS ENTRY SYSTEMS



DETAIL: 3D PATCH GLASS DOOR Scale: 1:20

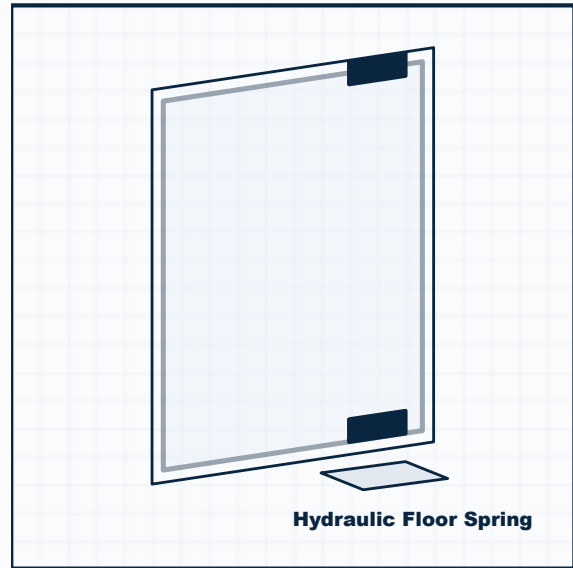

DRN: AMT-ENG

DWG NO: AMT-GD-3D

Technical Specifications

GLASS MATERIAL

Toughened safety glass or laminated safety glass. Thickness: 10mm or 12mm.

FRAME PROFILE

Sleek, slim aluminum frame (powder-coated/anodized) or frameless patch fittings.

HARDWARE

Heavy-duty hydraulic floor spring, top pivot, stainless steel tubular pull handles (350mm to 600mm).

BEST APPLICATIONS

- ✓ Office Entrances
- ✓ Conference Rooms
- ✓ Showrooms
- ✓ Malls




INDUSTRIAL SAFETY DOORS

HEAVY DUTY PROTECTION OPENINGS



DETAIL: 3D RIB STIFFENERS

Scale: 1:20

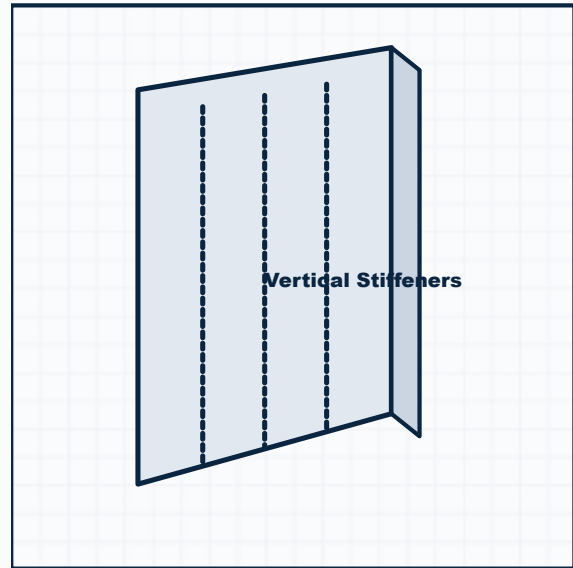

DRN: AMT-ENG

DWG NO: AMT-SD-3D

Technical Specifications

STRUCTURAL SHELL

1.2mm to 1.6mm thick high-tensile cold-rolled steel sheet, reinforced with internal stiffener ribs.

SECURITY LOCK

Heavy-duty mortise deadbolt lock with multi-point locking system for ultimate security.

HINGES

Ball bearing heavy duty steel hinges welded to the frame for smooth operation under load.

BEST APPLICATIONS

- ✓ Manufacturing Plants
- ✓ Refineries
- ✓ Bank Vaults
- ✓ Secure Storage Areas




GENERATOR SALES & SERVICE

ACOUSTIC ENCLOSURES & POWER SOLUTIONS



DETAIL: 3D ACOUSTIC CANOPY Scale: 1:30

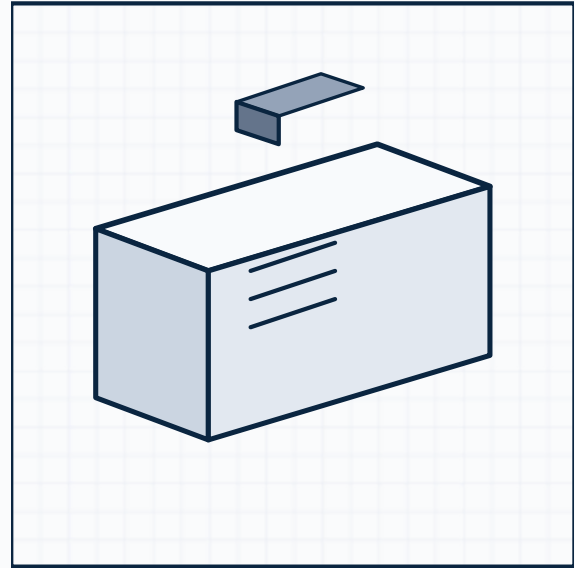

DRN: AMT-ENG

DWG NO: AMT-GEN-3D

Technical Specifications

ENCLOSURE STRUCTURE

Soundproof acoustic canopy with weather-proof powder-coated high grade steel panels.

ACOUSTIC PERFORMANCE

Engineered noise level reduction down to 75 dBA @ 1 meter range compliance norms.

ACCESS & MAINTENANCE

Double-sided wide doors with industrial keylocks for convenient engine & alternator service access.

BEST APPLICATIONS

- ✓ Corporate Offices
- ✓ Hospital Utility
- ✓ Industrial Plants
- ✓ Commercial Sites


FIRE EXTINGUISHERS

ACTIVE FIRE PROTECTION EQUIPMENT



DETAIL: 3D CYLINDER ASSEMBLY

Scale:
None

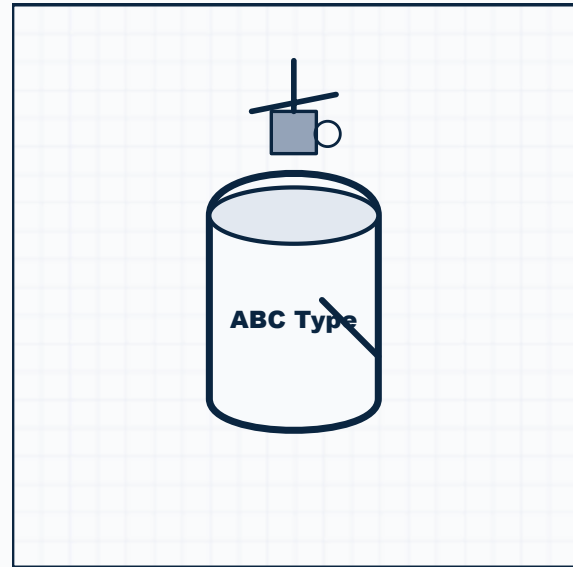

DRN: AMT-ENG

DWG NO: AMT-FE-3D

Technical Specifications

AGENT CLASSIFICATIONS

ABC Monoammonium Phosphate Powder, Carbon Dioxide (CO₂), Clean Agents, and Water-foam.

CYLINDER BUILD

High grade deep-drawn carbon steel shell body finished with rich anti-corrosion polyester powder coating.

VALVES & HOSES

Heavy duty brass valve assembly complete with safety pins, readable pressure gauge, and discharge horns.

BEST APPLICATIONS

- ✓ Office Corridors
- ✓ Electrical Rooms
- ✓ Industrial Floors
- ✓ Commercial Kitchens

TECHNICAL MATRIX & COMPLIANCE

Classification	Material Spec	Standard Sizes	Performance
Fire Exit & Steel Doors	Galvanized Steel / Honeycomb or Rockwool Fill	900 x 2100 mm & 1800 x 2100 mm (custom values available)	120 - 180 Mins Protection (CBRI / UL)
Industrial Rolling Shutters	Interlocking Cold-Rolled Galvanized Slats (0.8 - 1.2mm)	Width: 1000 - 3000 mm, Height: 2100 - 3000 mm	High-Wind Certified / Cycle Tested
Radiation Lead Doors	Pure Lead Core Sheeting / Solid Shutter skins	900 x 2100 mm & 1420 x 3000 mm	99.9% Attenuation / Shielding of Diagnostic Rays
Cleanroom & OT Doors	SS304 / GPSP / PUF Core Infill	800 x 2000 mm & 1000 x 2100 mm	Airtight Hermetic Seal / Anti-microbial Epoxy
Acoustic soundproof Doors	Damped GPSP Sheets / Multi-layer Acoustic cores	Single Leaf up to 1420mm, Shutter Thickness: 46mm	STC 40+ Sound Transmission Damping

ON-SITE DEPLOYMENT CHECKLIST

- ✦ Laser-guided geometric wall opening verification prior to installation to ensure zero gaps.
- ✦ Dynamic anchor pull tests to ensure robust installation under heavy operational loads.
- ✦ Intumescent perimeter expansion inspections for guaranteed thermal and draft seals.



Partner with **AMT Infra Solutions**

Get in touch with our engineering design team today to receive a tailored quotation, request material technical specifications, or schedule an on-site evaluation scan.



CENTRAL LOGISTICS HUB

No.7, Bhavani Street, TTK Nagar, West Tambaram, Chennai - 600045



DIRECT HELPLINE

+91 91597 96186



ELECTRONIC INQUIRIES

amtinfrasolutions@gmail.com

