

Critical Design Review: Puzzle Me Chess

February 22, 2021

EN.525.743.8VL.SP21

Mr. Joseph Vitale

Contents

Project description	3
Capabilities	3
Limitations	3
Functional description	4
System Block Diagram	4
Multiplexer Circuit Diagram	5
Code Flow Diagram	6
Interface description	8
Explanation of code	8
Code layout	12
Main	12
Display	12
SDcard	12
Button	12
Potentiometer	12
Material and resource requirements	12
List of Items (BOM)	12
Test equipment	12
Ording from	12
Development Plan and Schedule	13
Order of Development	13
Milestones and Schedule	13
Risk	13
Reference	13

Capability	Description below
Indicator	LED light indicator to show user hint/show answer feature
User Direction	OLED to describe to the user where to put pieces
SD Card	Read .csv standardized format to quickly import puzzles
User Direction	User input switch to show user answer, indicated by LEDs
User Direction	User input Button to show user a hint
Location Detection	Check board spots are correct for puzzle that was selected

Table 1: Shows the Capability's for Puzzle me Chess

Limitations	Description below
Location Detection	Not knowing which piece is on the spot
Auto Movement	Not being able to move the piece on correct spot
Puzzle Selection	Not having 3+ different puzzles to choose from
Physical	Not being able to light each square along the perimeter
Parts	Not having multiple colors to indicate wrong or right answer
Physical	Needing light to illuminate the chess board

Table 2: Shows the Limitation's for Puzzle me Chess

Project description

In chess there are many different ways to play the game. After each player moves three times there are 121 million different moves that can end the game. Many people need to practice chess in order to get better and there are many ways to do this. You can play over the internet and play computer which range from (400 - 3200) EIO or you can play puzzle's in chess. Puzzle's in chess allow you to study the board in a given state and make the next several moves. This project is dedicated to solving puzzles in the physical world.

The physical chess puzzle allows the user to practice looking at a physical board to solve each puzzle. This project is titled "Puzzle me Chess" and it will be equipped to have 3 different puzzle's. The chess board will allow the user to place each piece in the right location that is displayed on the OLED screen. After each piece is on the board the chess puzzle will then display to the user which color he/she will play. After the user makes his first move the board will check to see if the move was correct. If not the user will be asked to reset the piece and try again until puzzle is complete.

Capabilities

Capabilites for the Puzzle me Chess project range from Indicators, User Direction, SD card capability, and Location Detection. See below for more details.

*Assume User puts right pieces on spot

*Assume Chess Board will be lit evenly with light

Limitations

Limitations for the Puzzle me Chess project range from Location Detection, Auto Movement, Puzzle Selection, Physical and parts. See below for more details.

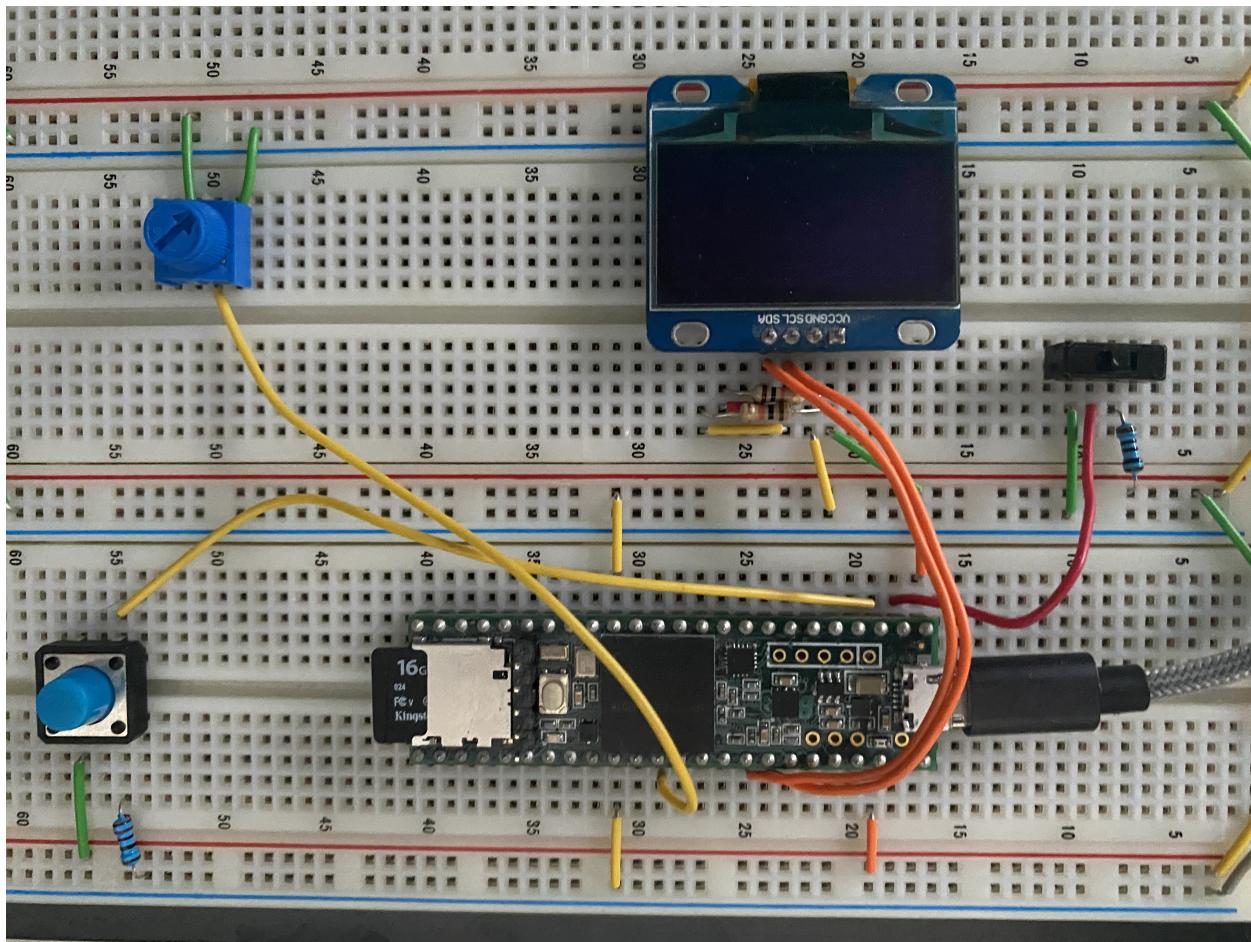


Figure 1: Circuit layout as of 02/16/2021

Functional description

The Puzzle me Chess project will feature a microcontroller, one 21x21 wooden chess board, 8 Multiplexers, 1 switch, 1 Potentiometer, 1 button, and A Display. Figure 1 shows the current circuit layout as of 02/16/2021, this circuit doesn't show the chess board. Explanation of the System Block Diagram to follow.

System Block Diagram

Figure 2 shows the sudo hand drawn block diagram. The project consist of One Microcontroller which will feature the teensy 3.6, 8 Multiplexer's from Texas Instruments part # CD4051BE, 1 basic breadboard switch, 1 breadboard Potentiometer, 1 basic breadbaord button, LED's, Photoresister's, 1 Chess Board and one Display.

The Chess board will have 1 LED and 1 photoresister per block. The LED will be drilled and placed on the top left side of each block and will be used to show the user where to place each piece. The photoresister will be drilled in the middle of each block and will be used as a voltage drop to tell if there is a piece there or not. See section multiplexer circuit diagram for the circuit layout.

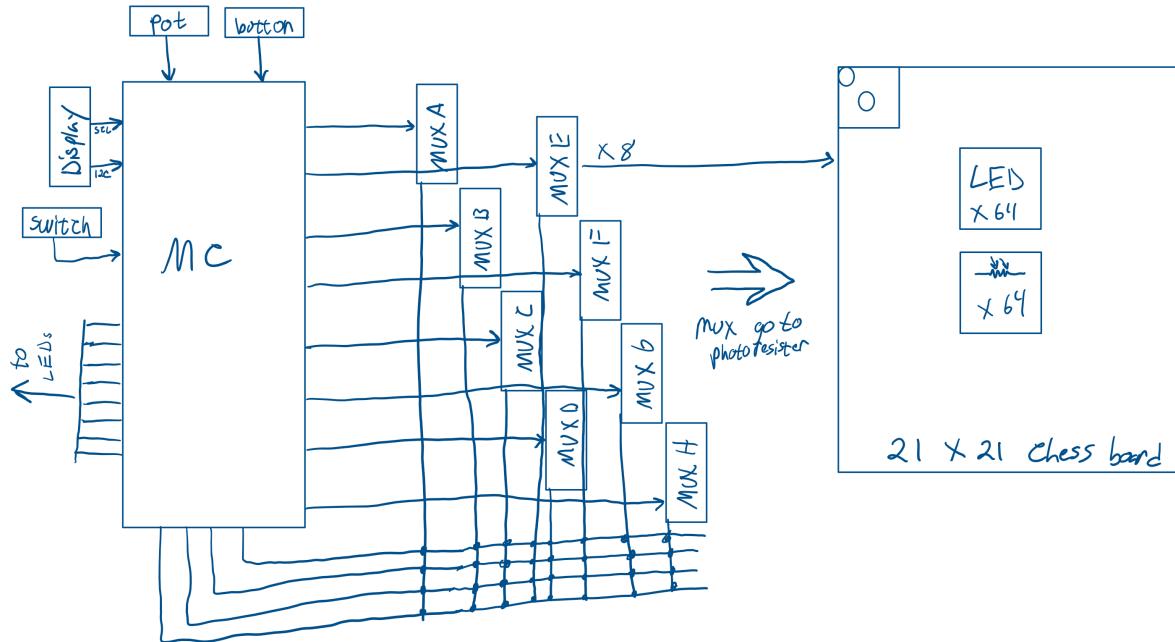


Figure 2: System Block Diagram

Multiplexer Circuit Diagram

Figure 3 shows the sudo circuit for Muxltiplexer A, the puzzle me chess project will consist of 8 Muxltriplexer one for each column A-H. Each of the Muxltriplexers will have 8 outgoing lines that will read Voltages levels from the rows # 1-8. Each row will have one resister which will be set to be $2M\Omega$ and one Photoresister in series. Each Photoresister has two modes a light and a dark mode. Equation (1) shows Mux input voltage at 3.29VDC and equation (2) shows Mux input voltage at 2.2VDC.

Assume Light; $R = 500\Omega$

Assume Dark; $R = 1M\Omega$

Light

$$V = IR, 3.3VDC = I*(2M + 500)\Omega$$

$I = 1.65\mu A$, $V_{light} = 825\mu VDC$, Mux input would see 3.299VDC if no piece on top of photoresister

(1)

Dark

$$V = IR, 3.3VDC = I*3.3M\Omega$$

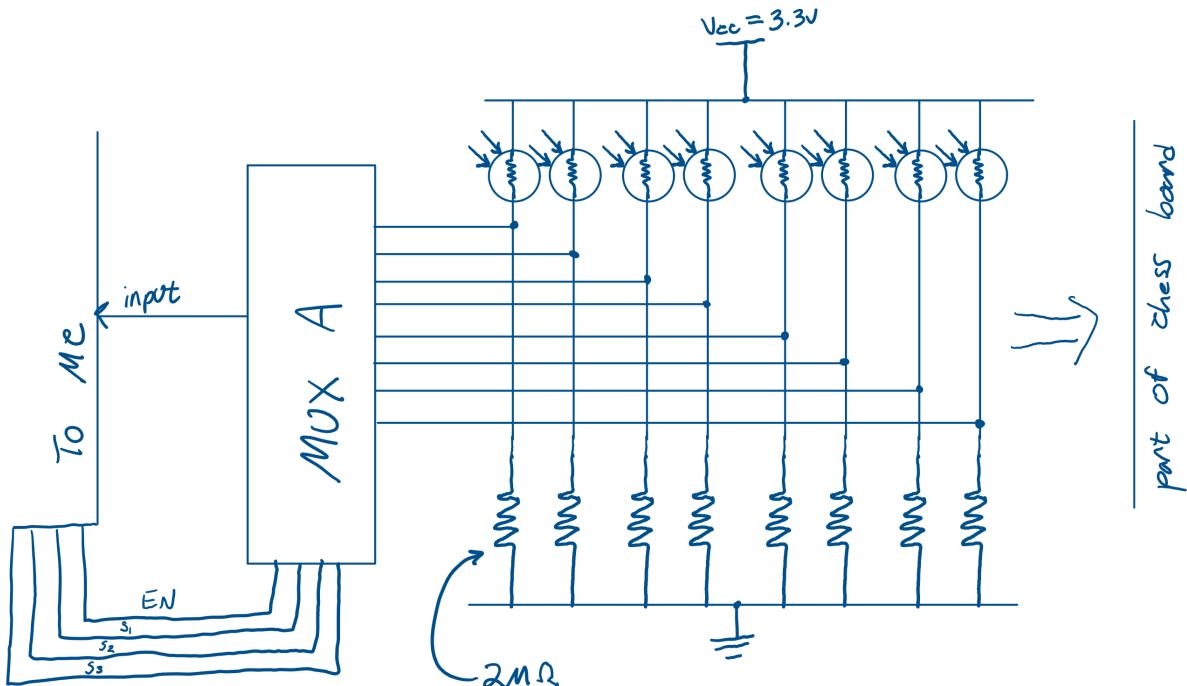


Figure 3: Multiplexer Sudo Circuit Diagram

$I = 1.1\mu A$, $V_{dark} = 1.1VDC$, Mux input would see $2.2VD$ if piece was placed on block

(2)

Code Flow Diagram

Figure 4 shows the code flow diagram. The code starts with the display showing the user to pick a puzzle which the user will use the potentiometer to select puzzle 1-3. After the Puzzle has been selected the display will show which puzzle the user selected and open that .csv file. The code will then map each space to a $2x2$ matrix with a cell name attached. The code will then display to the user which to place each piece on which block. LEDs will also light up to quickly help the user where to place each piece. After each piece has been placed the code will shut off each LED light and display to the user which color to first.

The code will have the ability to have the user use a button to light up LEDs to show the user the hint, and a switch to show the user the answer if they get stuck. If the wrong move is made on the chess board the code will have the ability to check each move and display if the move is correct or not. If the move is correct the display will show where the user needs to move the opponent piece so the user can continue the puzzle until completion. If the move is incorrect the user will be asked to place the piece back and try again.

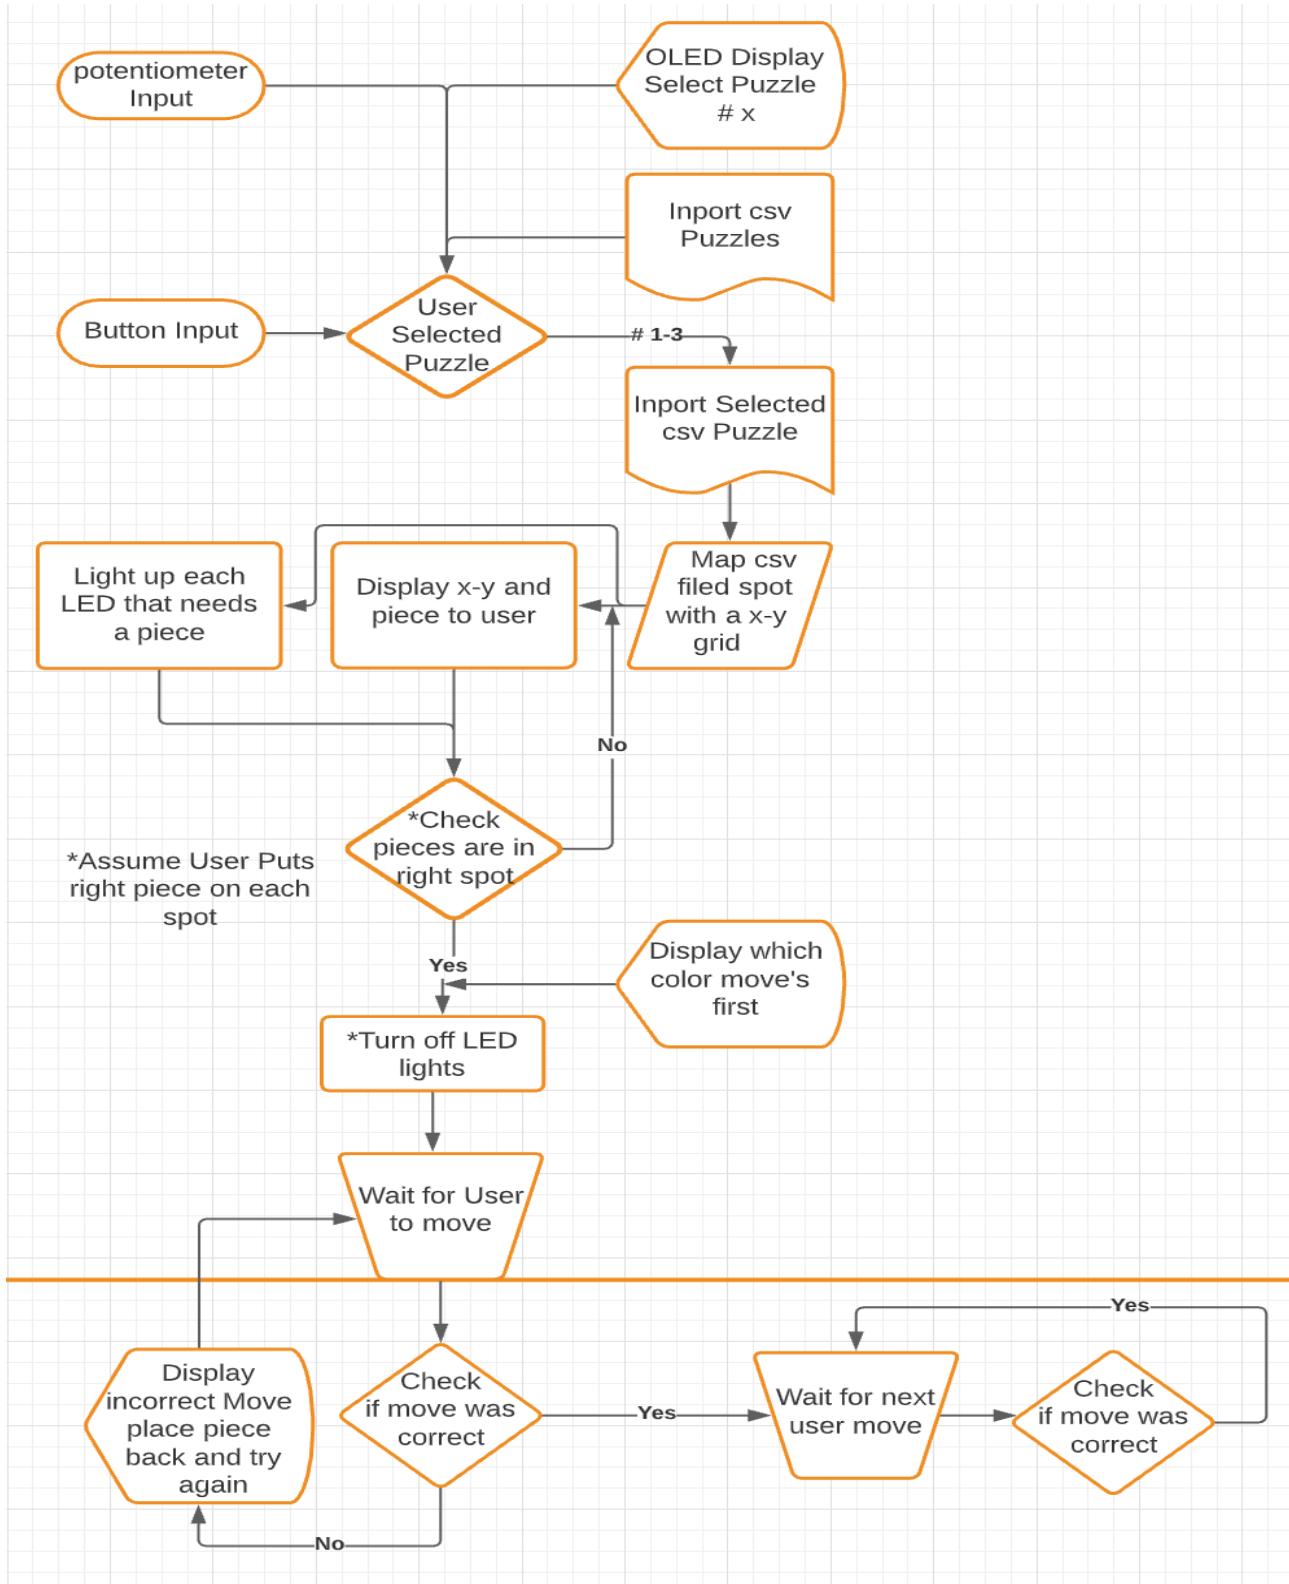


Figure 4: Code Flow Diagram

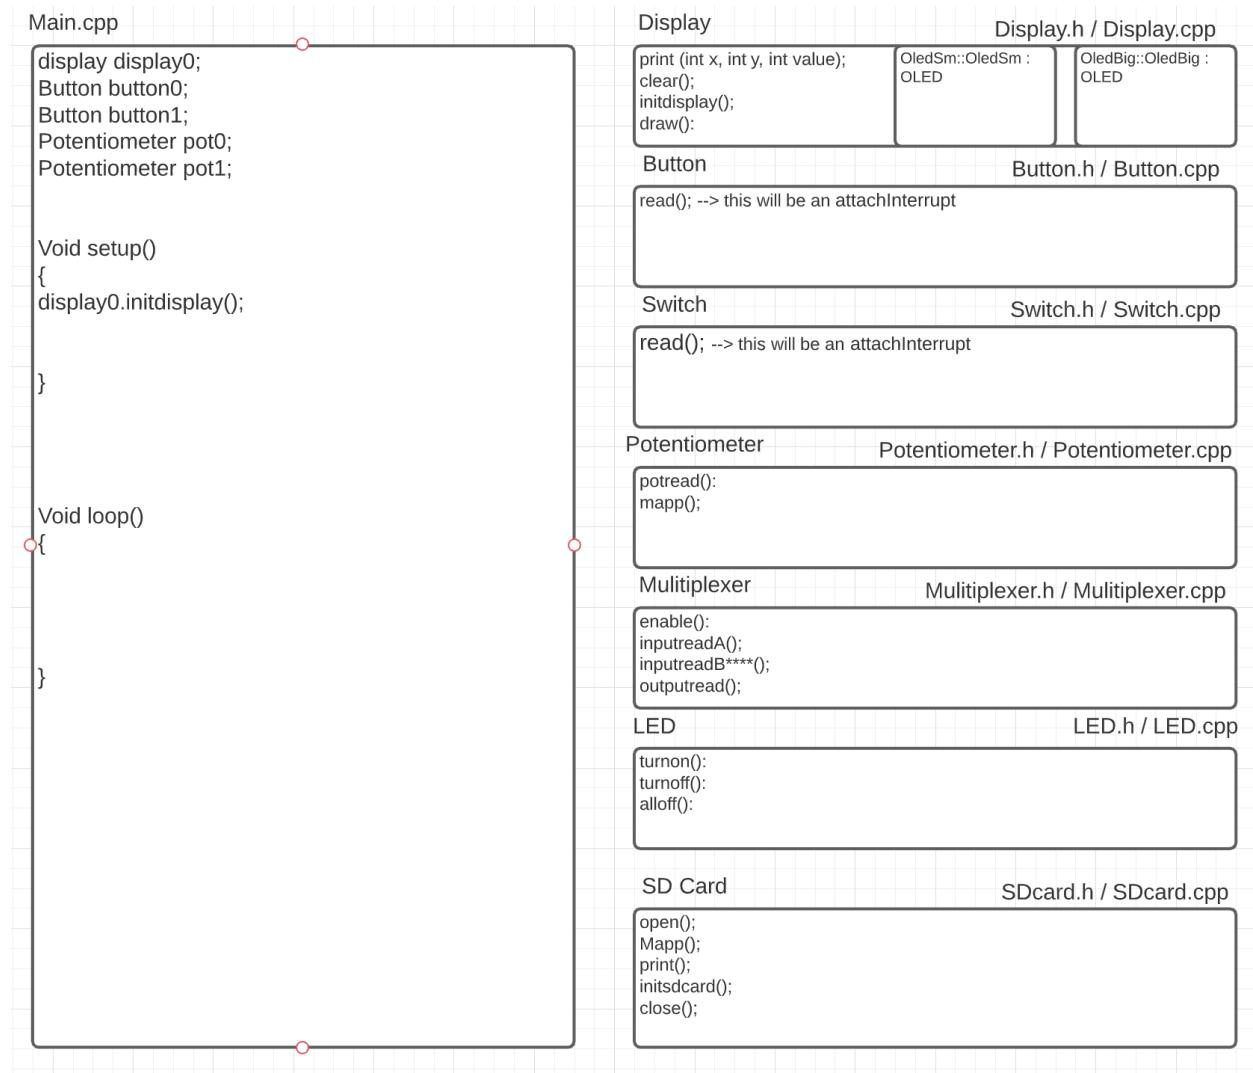


Figure 5: Module Code Layout

Interface description

The internal interface description

Explanation of code

Text Text

```
13 #include <Arduino.h>
14 #include <Potentiometer.h>
15 #include <Display.h>
16 #include <SDcard.h>
17 #include <Button.h>
18
19 //*****Declare*****
20 Display Display0; // Setting Object 0 for Display
21 SDcard SDcard0;
22 Button Button0;
23 Potentiometer Potentiometer0;
24 //*****Setup*****
25 void setup()
26 {
27     Display0.int_display();
28     SDcard0.int_SD();
29 //*****Inputs*****
30     Button0.init_button(); //setting D0 to button
31     Potentiometer0.init_pot(); // setting A0 to pot
32 } // end setup
33
34 void loop()
35 {
36 //*****Declare*****
37     Button Button1;
38     Potentiometer Potentiometer2;
39     Display Display1;
40 //*****Start of Code*****
41     while (Button1.r_button() == 0)
42     {
43
44         Potentiometer Potentiometer1; // moved from Declare b/c I need to pull value continuous
45         Display1.print_select_puzzle(45, 30, Potentiometer1.r_pot());
46     }
47
48     delay(1000); //--> to allow for button press
49
50     while (Button1.r_button() == 0)
51     {
52         Display1.print_user_puzzle(0,30, Potentiometer2.r_pot());
53         SDcard0.open();
54         break;
55     }
```

Figure 6: Puzzle me Chess - main.cpp file

```
1  ✓ #include <Display.h>
2  #include <Potentiometer.h>
3
4  //*****Declare*****
5  U8G2_SH1106_128X64_NONAME_F_HW_I2C u8g2(U8G2_R0, /* reset=*/U8X8_PIN_NONE);
6  //*****Setup*****
7  ✓ void Display::int_display()
8  {
9      u8g2.begin(); // Start the Library code for the Display
10 } // end void int_display
11 //*****Functions*****
12 ✓ void Display::print_select_puzzle(int x, int y, int value)
13 {
14     u8g2.clearBuffer();           // clear the internal memory
15     u8g2.setFlipMode(0);         // Flips display 180 (1) = True
16     u8g2.setFont(u8g2_font_9x18_tf); // choose a suitable font
17     u8g2.drawStr(0, 12, "Select Puzzle");
18     u8g2.drawStr(x, y, "#");
19     u8g2.setCursor(60, 30); // set cursor location
20     u8g2.print(value);
21     u8g2.sendBuffer(); // transfer internal memory to the display
22 } // end void print_select_puzzle
23
24 ✓ void Display::print_user_puzzle(int a, int b, int value1)
25 {
26     u8g2.clearBuffer();
27     u8g2.setFlipMode(0);
28     u8g2.setFont(u8g2_font_9x18_tf);
29     u8g2.drawStr(0, 12, "User Selected");
30     u8g2.drawStr(a, b, "#");
31     u8g2.setCursor(15, 30);
32     u8g2.print(value1);
33     u8g2.drawStr(30, 30, "Puzzle");
34     u8g2.sendBuffer();
35 } // end void print_user_puzzle
```

Figure 7: Puzzle me Chess - display.cpp file

```
void SDcard::open()
{
    if (!SD.begin(chipSelect))
    {
        while (true);
    }
    File dataFile = SD.open("1015704.CSV"); //opening File T015704.csv

    // if the file is available, write to it:

    if (dataFile)
    {
        while (dataFile.available())
        {
            Serial.write(dataFile.read());
        }
        dataFile.close();
    }

    // if the file isn't open, pop up an error:

    else
    {
        Serial.println("error opening 1015704.CSV");
    }
}
```

Figure 8: Puzzle me Chess - SDcard.cpp file

```
1 ˜ #include <Arduino.h>
2  #include <Button.h>
3
4 ˜ void Button::init_button()
5  {
6      pinMode(2, INPUT); // sets the digital pin 0 as input
7  } // end init_button
8
9 ˜ int Button::r_button()
10 {
11     int buttonstate1 = 1;
12     buttonstate1 = digitalRead(button1);
13     return (buttonstate1);
14 } // end r_button
```

Figure 9: Puzzle me Chess - button.cpp file

Code layout**Main****Display****SDcard****Button****Potentiometer****Material and resource requirements****List of Items (BOM)****Test equipment****Ording from**

include date and times and websites

```
1 ~ #include <Arduino.h>
2   #include <Potentiometer.h>
3
4   //*****Functions*****
5 ~ int Potentiometer::r_pot()
6   {
7     int potmap1 = map(pot1, 0, 1023, 1, 3); // map values 1-3
8     return (potmap1);
9   } // end r_pot
10
11 ~ void Potentiometer::init_pot()
12   {
13     pinMode(0, INPUT); // pin A0 mapped to an INPUT --> r_pot
14   } // end init_pot
```

Figure 10: Puzzle me Chess - Photentiometer.cpp file

Development Plan and Schedule

Order of Development

Milestones and Schedule

Risk

Reference