



### Bootloader mode


Use A-to-A cable plugged into OTG adapter for bootloader mode, or use normal Micro-B cable and hold SW1 while plugging.

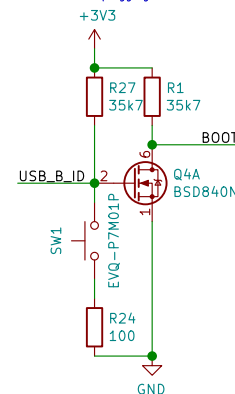


### Microcontroller

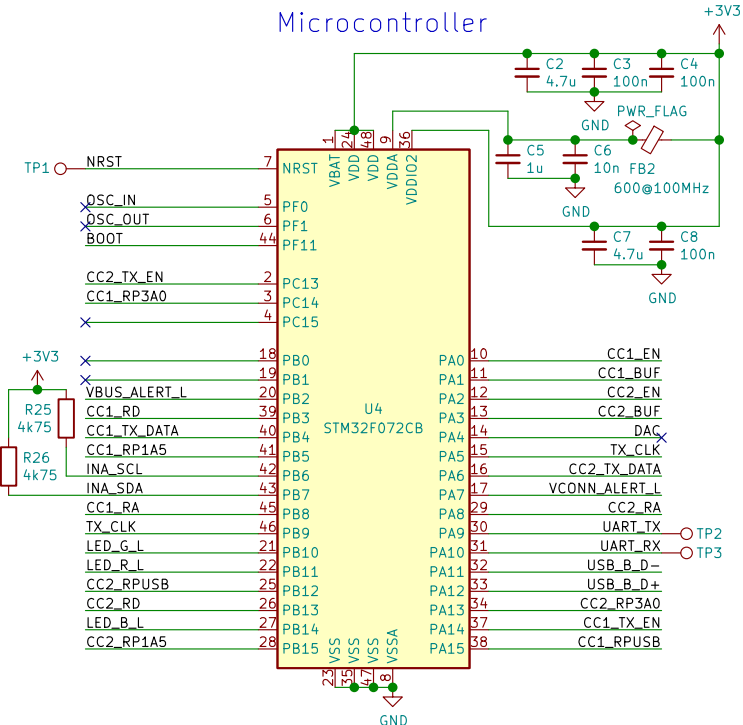

### USB-C & VBUS/VCONN monitoring

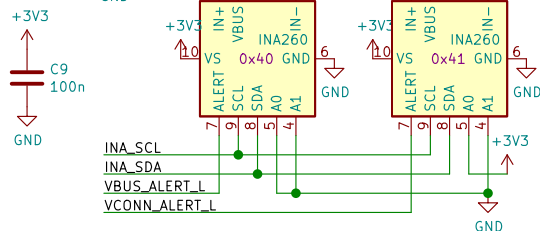

### Power

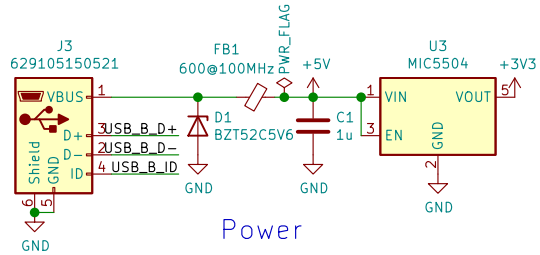

Sheet: /  
File: twonkie.sch

### Title:

Size: A4 Date:  
KiCad E.D.A. kicad (5.1.7)-1

Rev:  
Id: 1/1