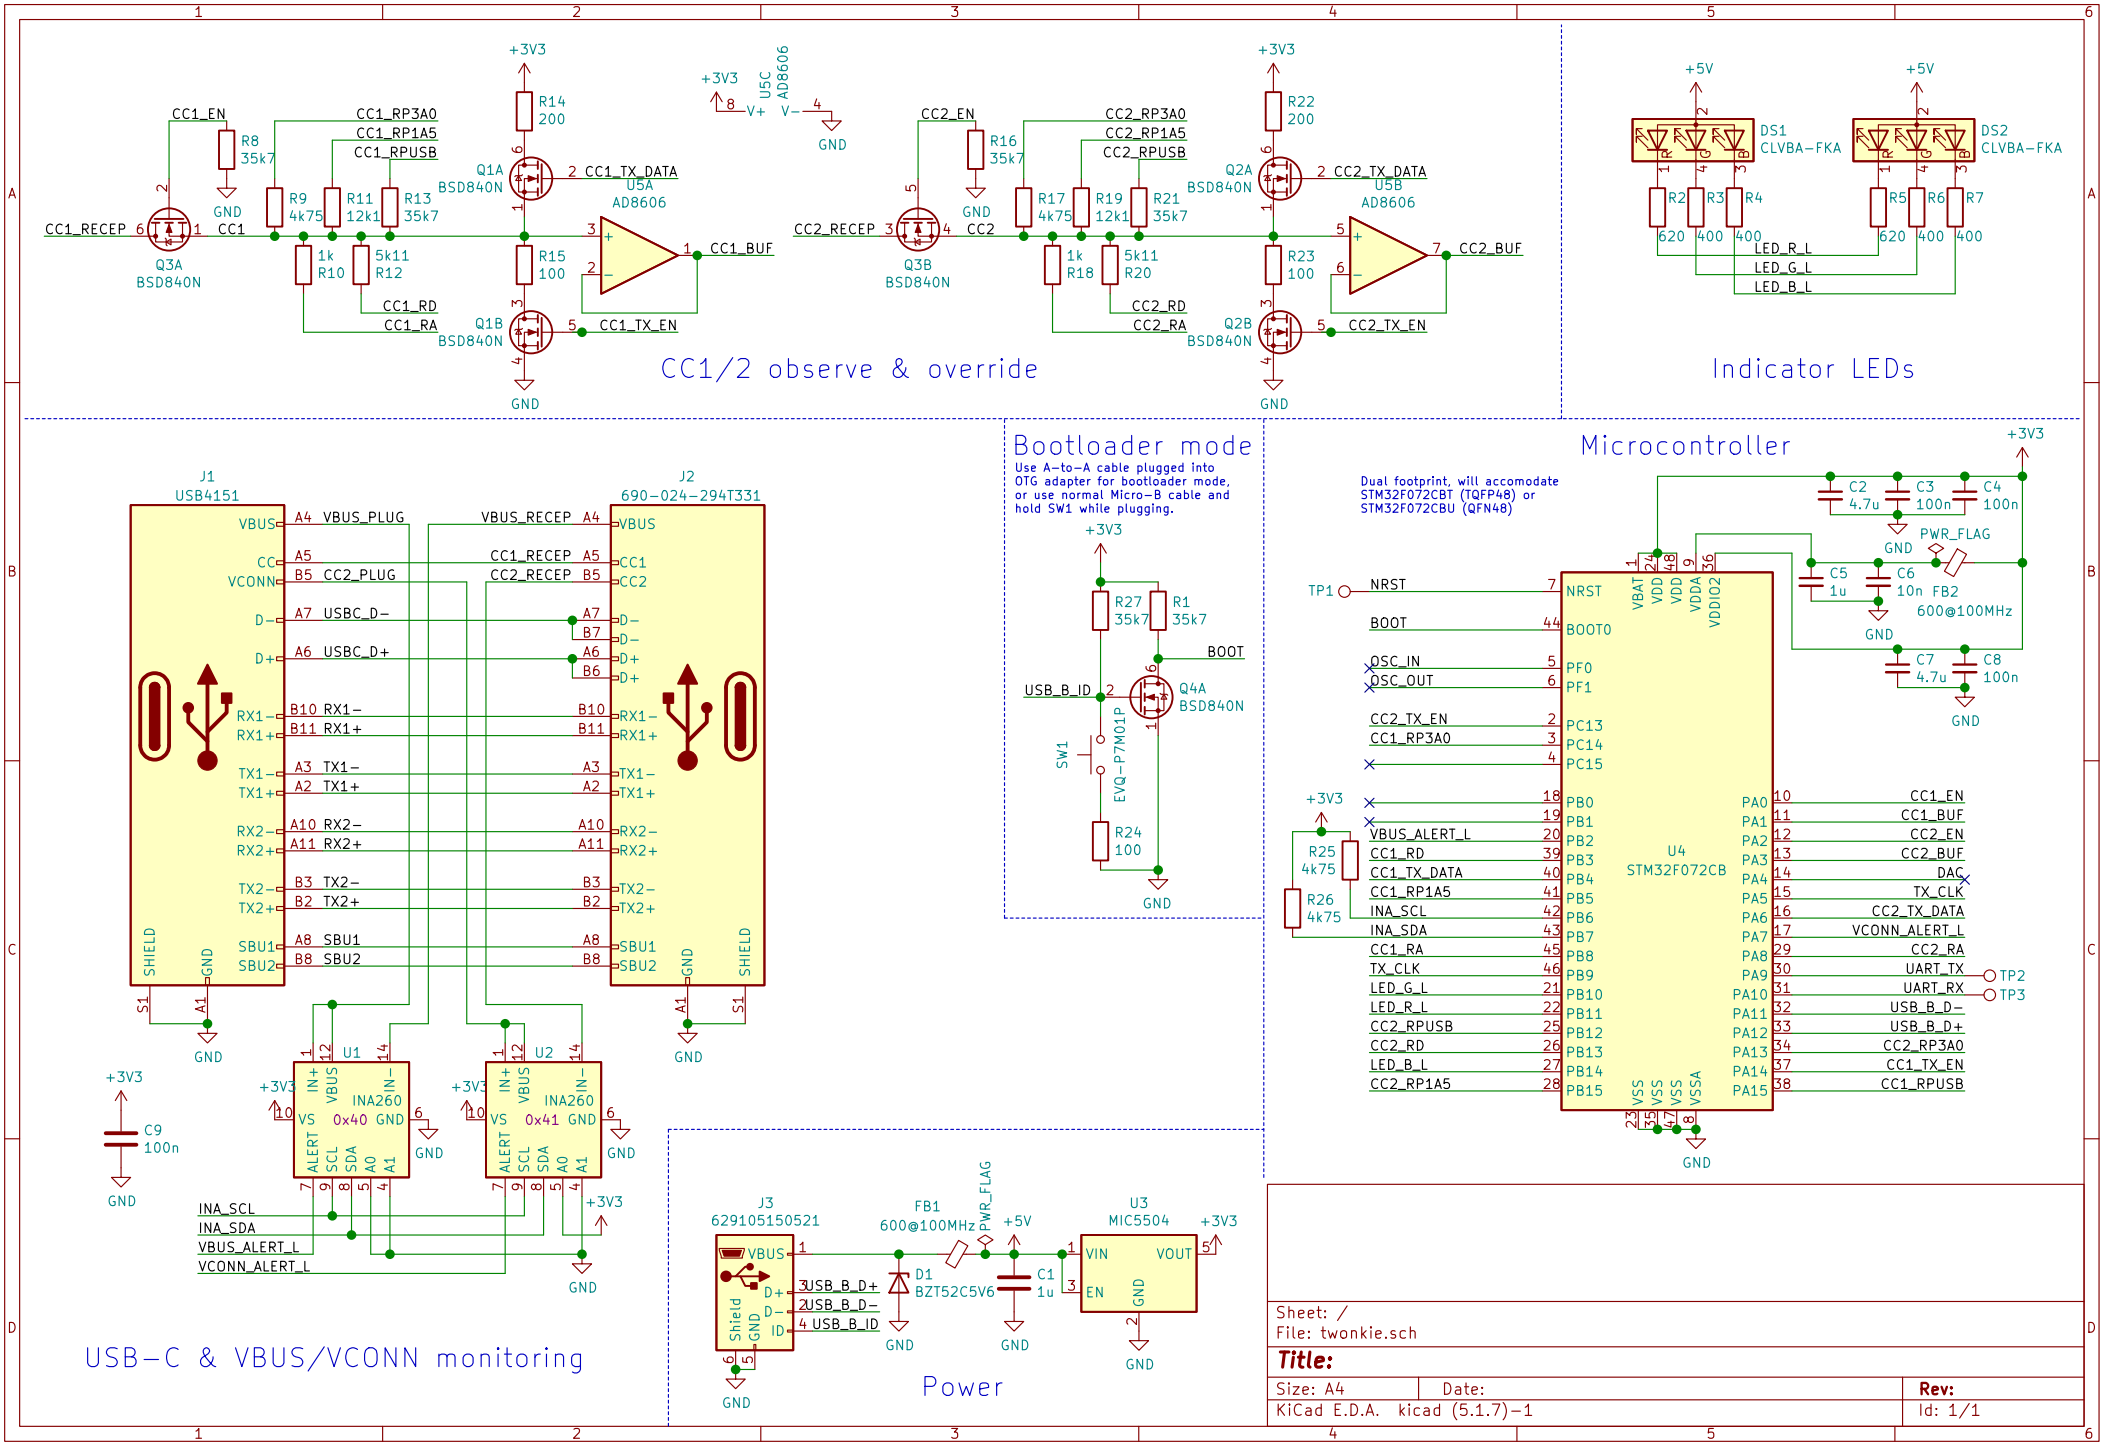
CC1/2 observe & override
Indicator LEDs
Bootloader mode
Use A-to-A cable plugged into OTG adapter for bootloader mode, or use normal Micro-B cable and hold SW1 while plugging.
Microcontroller
Dual footprint, will accomodate STM32F072CBT (TQFP48) or STM32F072CBU (QFN48)
USB-C & VBUS/VCONN monitoring
Power
Sheet: /
File: twonkie.sch
Title:
Size: A4
Date:
Rev:
KiCad E.D.A. kicad (5.1.7)-1
Id: 1/1