LG
Life's Good

SPLIT SYSTEM
AIR CONDITIONERS

Come home to comfort with LG



Come Home To Comfort
with LG air conditioners

—

Why LG Air Conditioning

Designed for the way you live, our air conditioners are available in a wide range of styles - so you can create a space that's cool, comfortable and stylish.

LG air conditioners have received numerous CHOICE awards for product quality over the last few years, and to give you further peace of mind, we also provide a **10 year compressor** parts warranty, so comfort will be with you for years to come.

With LG Split System air conditioning products, you'll also enjoy benefits such as:

• **Embedded Wi-Fi** - so that you can control your unit with your Smartphone, even when you're not at home*.

• **Active Energy Control** - to help track your energy consumption.

• **Low Noise** - LG Air Conditioners operate at low sound levels.

For ease of installation, energy efficiency and quiet performance, LG air conditioning systems are the smart choice.

Home Connectivity

LG is making your life simpler and more convenient with connected appliances so you can now control your air conditioner with the sound of your voice.

Google Assistant* is now compatible with LG Split System Air Conditioners.

This means, you can now delegate tasks or ask your LG Air Conditioner questions via the Google Assistant app or a compatible speaker.

The list of supported Google Assistant commands includes:

- OK Google, turn on the air conditioner
- OK Google, what's the temperature of the air conditioner
- OK Google, set the temperature to 22 degrees

This not only demonstrates LG's commitment to innovative technology in our products, but continuously finding ways of helping busy Australian's in their day to day life.

INVERTER COMPRESSOR 10 YEAR PARTS WARRANTY ON COMPRESSOR

RECOMMENDED CHOICE December 2019 — WH09SK-18

RECOMMENDED CHOICE December 2019 — WH24SL-18

RECOMMENDED CHOICE December 2019 — WH30SR-18

* Product Registration using both LG Smart ThinQ app & Google app is required. Internet, Wi-Fi connection and Google account required. Data usage may apply. Controlling devices and features requires compatible smart devices. Features and services may be changed without notice. Google is a trademark of Google LLC.

Download on the App Store



works with the Google Assistant

MODEL LINE-UP

SMART SERIES

WS Series

Built-In Wi-Fi

R32
REFRIGERANT



WS09TWS
Indoor : WS09TWN
Outdoor : WS09TWU
Cooling: ★★★★½
Heating: ★★★★★★

WS18TWS
Indoor : WS18TWN
Outdoor : WS18TWU
Cooling: ★★
Heating: ★★½

WS12TWS
Indoor : WS12TWN
Outdoor : WS12TWU
Cooling: ★★★
Heating: ★★★½

WS24TWS
Indoor : WS24TWN
Outdoor : WS24TWU
Cooling: ★★
Heating: ★★

MODEL LINE-UP

HIGH EFFICIENCY SERIES

WH Series

Built-In Wi-Fi

R32
REFRIGERANT



6 STAR ENERGY EFFICIENCY

WH09SK-18
Indoor : WH09SKN-18
Outdoor : WH09SKNU-18
Cooling: ★★★★★★
Heating: ★★★★★★


WH18SL-19
Indoor : WH18SLN-19
Outdoor : WH18SLU-19
Cooling: ★★★½
Heating: ★★★★

WH30SR-18
Indoor : WH30SRN-18
Outdoor : WH30SRU-18
Cooling: ★★★
Heating: ★★★★½

WH12SK-18
Indoor : WH12SKN-18
Outdoor : WH12SKNU-18
Cooling: ★★★★
Heating: ★★★★★

WH24SL-18
Indoor : WH24SLN-18
Outdoor : WH24SLU-18
Cooling: ★★★
Heating: ★★★★½

WH34SR-18
Indoor : WH34SRN-18
Outdoor : WH34SRU-18
Cooling: ★★½
Heating: ★★★

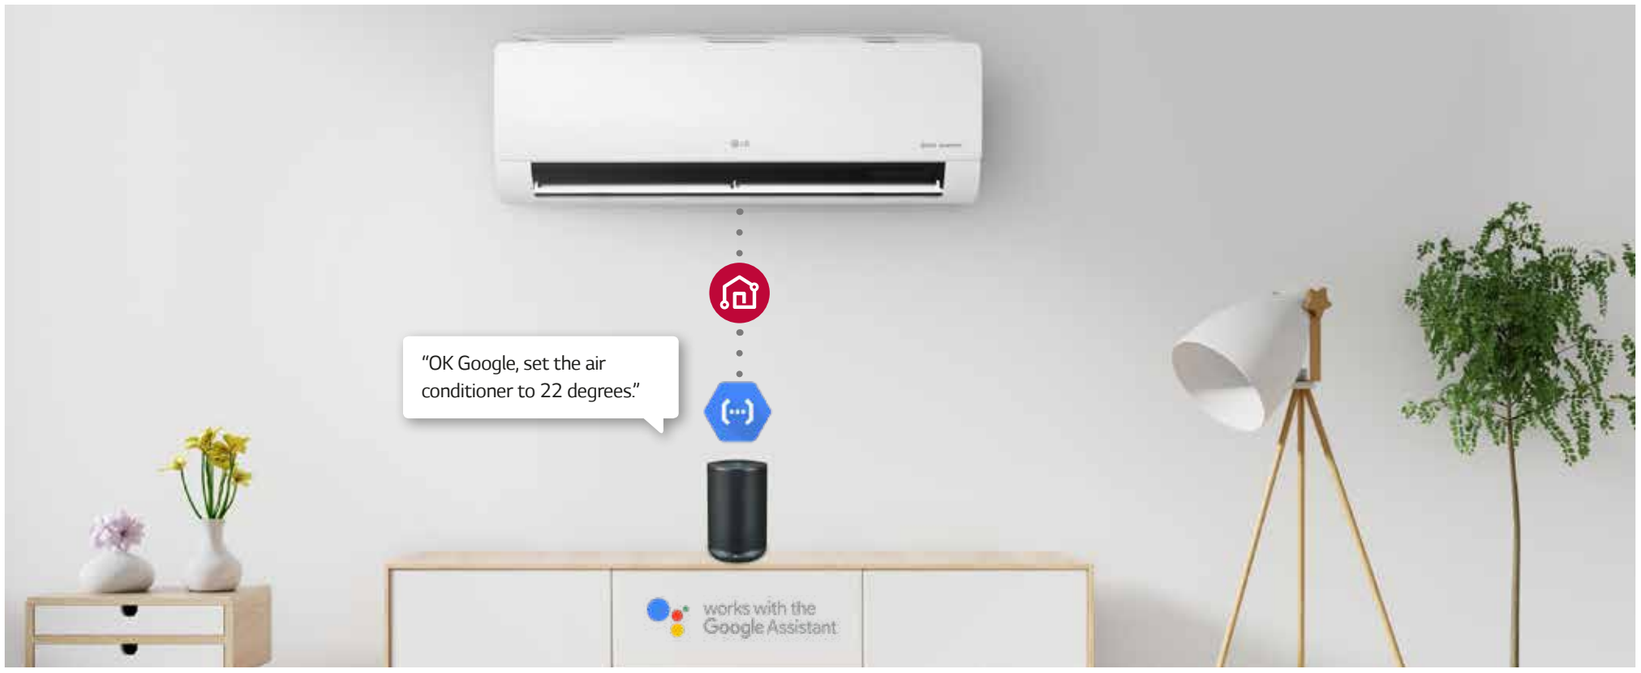

Product Registration using both LG Smart ThinQ app & Google app is required. Internet, Wi-Fi connection and Google account required. Data usage may apply.
Controlling devices and features requires compatible smart devices. Features and services may be changed without notice. Google is a trademark of Google LLC.

Control Your Air Conditioner with Your Voice.

Making it easy to control your air conditioner with your voice.
Voice Control through a compatible speaker available in all LG Split Systems with built-in Wi-Fi.

SMART

Embedded Wi-Fi

Built-in Wi-Fi Smart Control

The LG Smart ThinQ App lets you access and control your air conditioner with your smartphone* even when you're not at home.



* Product Registration using both LG Smart ThinQ app & Google app is required. Internet, Wi-Fi connection and Google account required. Data usage may apply. Controlling devices and features requires compatible smart devices. Features and services may be changed without notice. Google is a trademark of Google LLC.

Download on the App Store

works with the Google Assistant

Smart Diagnosis

Smart Diagnosis provides usage tips and useful information based on your product usage patterns. If you experience a problem while using the product, we will help you to troubleshoot it using the Smart Diagnosis results.





CORE TECHNOLOGY

Smart Inverter Compressor

Temperature control

The Compressor speed of the LG Smart Inverter Compressor™ is constantly adjusted and varied to maintain the desired temperature with less fluctuation than a non-inverter compressor.



Energy Display & Monitoring

View your real time energy usage

A simple push of the remote control button allows you to conveniently view current energy usage on your air conditioner's panel.






Benefit

Normal Mode
Current Temperature Setting



Electric Power
Displays Current Energy Use

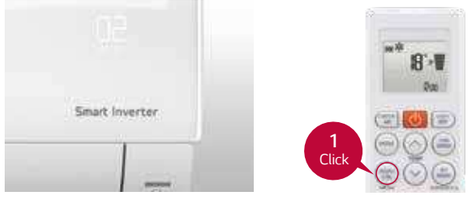

Energy Monitoring
You can also view your weekly or monthly energy usage on the Smart ThinQ app.



KEY FEATURES
ENERGY EFFICIENCY

Active Energy Control 4 - Step

Take tighter control of your energy usage

Active energy control allows the user to adjust the energy levels to improve cooling efficiency and help reduce power consumption.

How It Works


Normal.
100% energy usage

Many people and high-activity level




Step 1.
80% energy usage

Few people and moderate-activity levels.

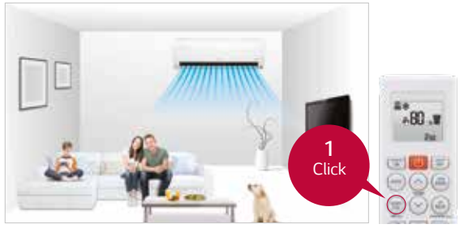


Step 2.
60% energy usage

Fewer people and low-activity levels.

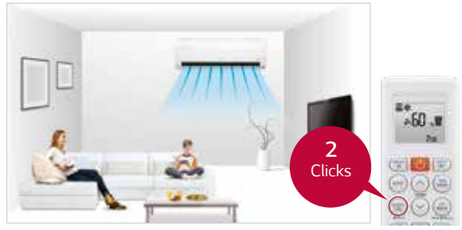


Step 3.
40% energy usage

Fewest people with no activity.

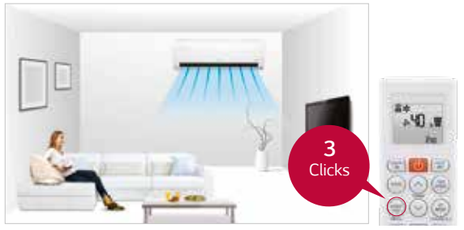

Energy Savings

Limiting power consumption from 80-40% of normal use inscreases energy efficiency up to 50%.

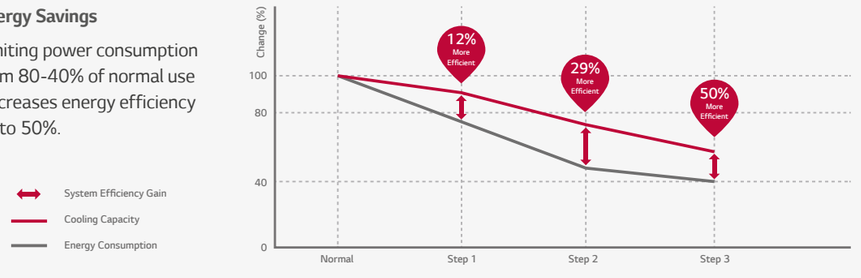

* Test Conditions : Temperature. (Indoor Temperature : 27°C DB / 19°C WB, Outdoor Temperature : 35°C), Air Conditioner model WH24.

KEY FEATURES

CLEAN, FILTERED AIR

Plasmaster™ Ionizer+PLUS

Plasmaster Ioniser Plus & Auto Cleaning

The Plasmaster Ioniser generates over 3 million plasma ions which filtrate the air in the indoor environment and inside the air conditioning unit itself. The Auto Cleaning function helps to minimise the formation of mould and bacteria on the heat exchanger.

Filtration and Deodorisation



* Applicable to WH Series only.

Auto Cleaning

Auto Cleaning dries the coil helping to minimise bacteria, mould and odours that can otherwise accumulate in an indoor unit.





KEY FEATURES

DURABILITY

10-Year Compressor Parts Warranty

Smart Inverter Compressor™

The LG Smart Inverter Compressor™ is designed to cope with high temperatures, so great for those hot Australian conditions. With the 10 year compressor parts warranty*, you have the peace of mind that you can come home to comfort for years to come.



* 5 years parts and labour + 5 years limited parts warranty on the compressor.


Gold Fin™

The Gold Fin™ coating helps protect the surface of the heat exchanger from corrosion.

How It Works

Crosscut View of Heat Exchanger

The gold-coloured special coating on the fin of the heat exchanger helps prevent corrosion.

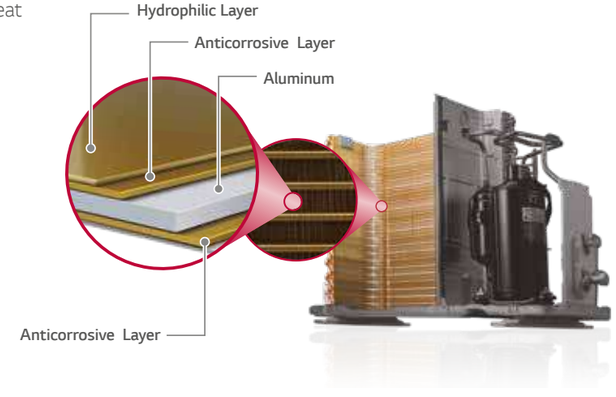

Low Noise

Sleep easy


LG air conditioners operate at low sound levels, thanks to the skew fan and Smart Inverter Compressor™ which reduces unnecessary noise.



KEY FEATURES
QUIET & COMFORTABLE

Comfort Air

This option conveniently sets an ACs louvers to a preset position so that outflowing air is directed away from a room's occupants.

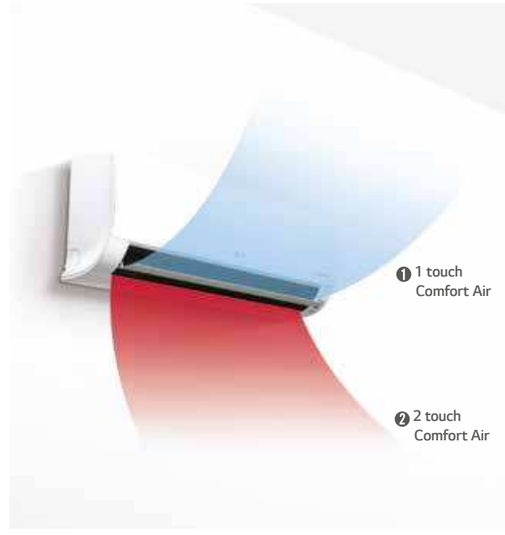

Scene 1: Inclines to a maximum 70° angle.
Sets vane angle to highest position :
Optimised for gentle airflow cooling.

Indoor Unit Display



Remote Controller Display



Scene 2: Declines to a maximum 0° angle.
Sets vane angle to lowest position :
Optimised for gentle airflow heating.

Indoor Unit Display



Remote Controller Display



KEY FEATURES

SMART SERIES



	Model	WS09TWS	WS12TWS	WS18TWS	WS24TWS
	Cool kW	2.6	3.4	4.8	6.3
	Heat kW	3.2	4.0	5.9	7.3
SMART	Embedded Wi-Fi	●	●	●	●
SMART	Smart Diagnosis	●	●	●	●
ENERGY EFFICIENCY	Energy Display & Monitoring	●	●	●	●
ENERGY EFFICIENCY	Active Energy Control - 4 Step	●	●	●	●
CLEAN, FILTERED AIR	Plasmaster Ionizer PLUS	X	X	X	X
CLEAN, FILTERED AIR	Auto Cleaning	●	●	●	●
DURABILITY	10-Year Compressor Parts Warranty	●	●	●	●
CORE TECHNOLOGY	Smart Inverter Compressor	●	●	●	●
QUIET & COMFORTABLE	Low Noise	●	●	●	●
QUIET & COMFORTABLE	Comfort Air	●	●	●	●
QUIET & COMFORTABLE	Quick & Easy Installation	●	●	●	●
COMFORT COOL	2-Way Swing	●	●	●	●
COMFORT COOL	Jet Cool	●	●	●	●
CONTROL	Dry Contact	●	●	●	●
ENERGY RATING	Cooling	4.5	3	2	2
ENERGY RATING	Heating	5	3.5	2.5	2

KEY FEATURES

HIGH EFFICIENCY SERIES



	Model	WH09SK-18	WH12SK-18	WH18SL-19	WH24SL-18	WH30SR-18	WH34SR-18
	Cool kW	2.5	3.5	5.0	7.1	8.5	9.4
	Heat kW	3.2	4.0	6.0	8.0	9.0	10.3
SMART	Embedded Wi-Fi	●	●	●	●	●	●
SMART	Smart Diagnosis	●	●	●	●	●	●
ENERGY EFFICIENCY	Energy Display & Monitoring	●	●	●	●	●	●
ENERGY EFFICIENCY	Active Energy Control - 4 Step	●	●	●	●	●	●
CLEAN, FILTERED AIR	Plasmaster Ionizer PLUS	●	●	●	●	●	●
CLEAN, FILTERED AIR	Auto Cleaning	●	●	●	●	●	●
DURABILITY	10-Year Compressor Parts Warranty	●	●	●	●	●	●
CORE TECHNOLOGY	Smart Inverter Compressor	●	●	●	●	●	●
QUIET & COMFORTABLE	Low Noise	●	●	●	●	●	●
QUIET & COMFORTABLE	Comfort Air	●	●	●	●	●	●
QUIET & COMFORTABLE	Quick & Easy Installation	●	●	●	●	●	●
COMFORT COOL	4-Way Swing	●	●	●	●	●	●
COMFORT COOL	Jet Cool	●	●	●	●	●	●
CONTROL	Dry Contact	●	●	●	●	●	●
ENERGY RATING	Cooling	6	4	3.5	3	3	2.5
ENERGY RATING	Heating	6	5	4	3.5	3.5	3

KEY FEATURES

CONTROL

Remote Control



1. Comfort Air Mode
2. On / Off
3. Light Off
4. Operation Mode
5. Temperature Setting
6. Indoor Fan Speed
7. Energy Control
8. Jet Cool / Jet Heat
9. Airflow Control (Up and Down)
10. Airflow Control (Left and Right)
11. Room Temperature
12. Function
13. Timer
14. Set / Clear

Commercial Application

Optional controllers for commercial applications

Model				
	PREMTB001 (STANDARD WIRED)	PREMTA000 (Premium WIRED)	PACEZA000 (AC EZ TOUCH)	PACS5A000 (AC SMART 5)
Requirement			PI485 card	PI485 card
WH09	✓	✓	✓	✓
WH12	✓	✓	✓	✓
WH18	✓	✓	✓	✓
WH24	✓	✓	✓	✓
WH30	✓	✓	✓	✓
WH34	✓	✓	✓	✓

Model			
	PACP4B000	PACM4B000	PMNFP14A1
	Power Module (ACP)	(AC MANAGER 4)	(PI485 32 IDU)
Requirement	PI485 card	PI485 card & ACP	One per outdoor unit
WH09	✓	✓	✓
WH12	✓	✓	✓
WH18	✓	✓	✓
WH24	✓	✓	✓
WH30	✓	✓	✓
WH34	✓	✓	✓

SPECIFICATIONS

SMART SERIES

WS Series

Built-In Wi-Fi

Indoor Unit : WS09TWN / Outdoor Unit : WS09TWU
Indoor Unit : WS12TWN / Outdoor Unit : WS12TWU
Indoor Unit : WS18TWN / Outdoor Unit : WS18TWU
Indoor Unit : WS24TWN / Outdoor Unit : WS24TWU



Model				WS09TWS	WS12TWS	WS18TWS	WS24TWS
Indoor Unit			Unit	WS09TWN	WS12TWN	WS18TWN	WS24TWN
Outdoor Unit				WS09TWU	WS12TWU	WS18TWU	WS24TWU
Rated Capacity	Cooling		kW	2.6	3.4	4.8	6.3
	Heating		kW	3.2	4.0	5.9	7.3
Capacity Range	Cooling	Min ~ Max	kW	0.89 ~ 3.7	0.89 ~ 4.04	0.9 ~ 5.5	0.9 ~ 7.42
	Heating	Min ~ Max	kW	0.89 ~ 5.0	0.89 ~ 6.0	0.9 ~ 6.4	0.9 ~ 8.64
Power Input	Cooling	Rated	kW	0.60	0.89	1.46	1.92
	Heating	Rated	kW	0.74	0.99	1.67	2.23
Running Current	Cooling	Rated	A	3.0	4.4	6.5	8.5
	Heating	Rated	A	3.3	4.7	7.4	9.9
EER			W/W	4.33	3.79	3.28	3.28
AEER			-	4.26	3.76	3.27	3.26
COP			W/W	4.31	4.04	3.52	3.26
ACOP			-	4.25	4.00	3.5	3.25
Energy Label / Star Ratings		Cooling	-	4.5 STAR	3.0 STAR	2.0 STAR	2.0 STAR
		Heating	-	5.0 STAR	3.5 STAR	2.5 STAR	2.0 STAR
Power Supply			Ø, V, Hz	1Ph, 220~240V, 50Hz	1Ph, 220~240V, 50Hz	1Ph, 220~240V, 50Hz	1Ph, 220~240V, 50Hz
Indoor	Air Flow Rate	Cooling, Max / H / M / L	L/s	200 / 183 / 150 / 92	200 / 183 / 150 / 92	258 / 242 / 217 / 175	305 / 268 / 218 / 175
		Heating, Max / H / M / L	L/s	208 / 183 / 150 / 108	208 / 183 / 150 / 108	308 / 267 / 225 / 183	330 / 293 / 238 / 183
	Sound Pressure Level	Cooling, Max / H / M / L / SL	dB(A)	48 / 42 / 37 / 27 / 19	48 / 42 / 37 / 27 / 19	49 / 44 / 39 / 34 / 31	49 / 47 / 42 / 34 / 31
	Dimensions (W × H × D)	Net	mm	837 x 308 x 189	837 x 308 x 189	998 x 345 x 210	998 x 345 x 210
	Weight	Net	kg	9.1	9.1	11.9	12.7
Outdoor	Compressor		-	Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary
	Condenser	Corrosion Protection	-	Gold	Gold	Gold	Gold
	Sound Pressure Level	Cooling, Rated	dB(A)	49	49	53	54
		Heating, Rated	dB(A)	51	51	55	57
	Sound Power Level		dB(A)	65	65	65	66
	Dimensions* (W × H × D)	Net	mm	770 x 545 x 288	770 x 545 x 288	770 x 545 x 288	870 x 650 x 330
	Weight	Net	kg	34.1	34.1	34.4	46.0
	Operation Range	Cooling	°C DB	-15 ~ 48	-15 ~ 48	-15 ~ 48	-15 ~ 48
		Heating	°C DB	-15 ~ 24	-15 ~ 24	-10 ~ 24	-10 ~ 24
Field Connections							
Circuit Breaker			A	15	15	20	20
Power Supply Guide			No.	3 Core + Earth	3 Core + Earth	3 Core + Earth	3 Core + Earth
Power Supply to Unit			-	Outdoor	Outdoor	Outdoor	Outdoor
Power and Communication Cable			No. x mm^2	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)
Field Piping							
Piping	Size	Liquid	mm(inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
		Gas	mm(inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 12.7 (1/2)	Ø 15.88 (5/8)
	Connections Method	Indoor / Outdoor	-	Flared / Flared	Flared / Flared	Flared / Flared	Flared / Flared
Drain Hose Size		O.D, I.D	mm	20/15	20/15	20/15	20/15
Between Indoor & Outdoor	Piping Length	Min ~ Max	m	3 ~ 20	3 ~ 20	3 ~ 20	3 ~ 30
		Pre-Charge Length	m	7.5	7.5	7.5	7.5
	Max. Elevation Difference		m	10	10	10	15
	Piping Connection Heat Insulation		-	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes
Refrigerant Charge		Type	-	R32	R32	R32	R32
		Pre Charge	g	800	800	1000	1100
		Additional Charge	g/m	20	20	20	20
		Control	-	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve

* Dimensions do not include service valve part/cover.

HIGH EFFICIENCY SERIES

WH Series

Built-In Wi-Fi

Indoor Unit : WH09SKN-18 / Outdoor Unit : WH09SKNU-18
Indoor Unit : WH12SKN-18 / Outdoor Unit : WH12SKNU-18
Indoor Unit : WH18SLN-19 / Outdoor Unit : WH18SLU-19



Model				Unit	WH09SK-18	WH12SK-18	WH18SL-19
Indoor Unit					WH09SKN-18	WH12SKN-18	WH18SLN-19
Outdoor Unit					WH09SKNU-18	WH12SKNU-18	WH18SLU-19
Rated Capacity	Cooling			kW	2.50	3.50	5.00
	Heating			kW	3.20	4.00	6.00
Capacity Range	Cooling	Min ~ Max		kW	0.89 ~ 3.70	0.89 ~ 4.20	1.0 ~ 6.0
	Heating	Min ~ Max		kW	0.89 ~ 5.0	0.89 ~ 6.0	1.0 ~ 9.0
Power Input	Cooling	Rated		kW	0.51	0.86	1.22
	Heating	Rated		kW	0.65	0.87	1.38
Running Current	Cooling	Rated		A	2.80	4.00	5.10
	Heating	Rated		A	3.80	4.10	5.90
Full Load Amps				A	6.50	6.50	12.70
EER				W/W	4.88	4.07	4.10
AEER				-	4.76	4.01	4.09
COP				W/W	4.90	4.60	4.35
ACOP				-	4.80	4.53	4.34
Energy Label / Star Ratings		Cooling		-	6.0 STAR	4.0 STAR	3.5 STAR
		Heating		-	6.0 STAR	5.0 STAR	4.0 STAR
Power Supply				Ø, V, Hz	1Ph, 220~240V, 50Hz	1Ph, 220~240V, 50Hz	1Ph, 220~240V, 50Hz
Indoor	Air Flow Rate	Max / H / M / L / SL		L/s	333 / 200 / 166 / 86 / 63	333 / 200 / 166 / 86 / 63	383 / 283 / 233 / 183
	Sound Pressure Level	Cooling, Max / H / M / L / SL		dB(A)	- / 42 / 36 / 26 / 22	- / 42 / 36 / 26 / 22	- / 46 / 41/ 36 / 27
	Dimensions (W × H × D)	Net		mm	998 x 345 x 210	998 x 345 x 210	1060 / 360 / 265
	Weight	Net		kg	12.0	12.0	16.6
Outdoor	Compressor			-	Twin Rotary	Twin Rotary	Twin Rotary
	Condenser	Corrosion Protection		-	Gold	Gold	Gold
	Sound Pressure Level	Cooling, Rated		dB(A)	49	49	49
		Heating, Rated		dB(A)	51	51	52
	Sound Power Level			dB(A)	63	63	65
	Dimensions* (W × H × D)	Net		mm	770 x 545 x 288	770 x 545 x 288	870 x 650 x 330
	Weight	Net		kg	35	35	45.7
	Operation Range	Cooling		℃ DB	-10 ~ 48	-10 ~ 48	-10 ~ 48
		Heating		℃ DB	-10 ~ 24	-10 ~ 24	-10 ~ 24
Field Connections							
Circuit Breaker				A	15	15	20
Power Supply Guide				No.	3 Core + Earth	3 Core + Earth	3 Core + Earth
Power Supply to Unit				-	Outdoor	Outdoor	Outdoor
Power and Communication Cable				No. x mm²	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)
Field Piping							
Piping	Size	Liquid		mm(inch)	Ø 6.35 (1/4)	Ø 6.35 (1/4)	Ø 6.35 (1/4)
		Gas		mm(inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 12.7 (1/2)
	Connections Method	Indoor / Outdoor		-	Flared / Flared	Flared / Flared	Flared / Flared
Drain Hose Size		O.D, I.D		mm	21.5, 16.0	21.5, 16.0	20.0, 15.0
Between Indoor & Outdoor	Piping Length	Min ~ Max		m	3 ~ 20	3 ~ 20	3 ~ 30
		Pre-Charge Length		m	12.5	12.5	7.5
	Max. Elevation Difference			m	10	10	20
	Piping Connection Heat Insulation			-	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes
Refrigerant Charge		Type		-	R32	R32	R32
		Pre Charge		g	900	900	1300
		Additional Charge		g/m	20	20	20
		Control		-	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve

* Dimensions do not include service valve part/cover.

HIGH EFFICIENCY SERIES

WH Series

Built-In Wi-Fi

Indoor Unit : WH24SLN-18 / Outdoor Unit : WH24SLU-18
Indoor Unit : WH30SRN-18 / Outdoor Unit : WH30SRU-18
Indoor Unit : WH34SRN-18 / Outdoor Unit : WH34SRU-18



Model				Unit	WH24SL-18	WH30SR-18	WH34SR-18
Indoor Unit					WH24SLN-18	WH30SRN-18	WH34SRN-18
Outdoor Unit					WH24SLU-18	WH30SRU-18	WH34SRU-18
Rated Capacity	Cooling			kW	7.10	8.50	9.40
	Heating			kW	8.00	9.00	10.30
Capacity Range	Cooling	Min ~ Max		kW	1.0 ~ 8.60	2.0 ~ 9.50	2.0 ~ 11.20
	Heating	Min ~ Max		kW	1.0 ~ 10.60	2.0 ~ 12.0	2.0 ~ 12.8
Power Input	Cooling	Rated		kW	1.89	2.26	2.68
	Heating	Rated		kW	1.99	2.24	2.74
Running Current	Cooling	Rated		A	8.40	10.10	12.00
	Heating	Rated		A	8.90	10.00	12.30
Full Load Amps				A	12.70	16.00	16.00
EER				W/W	3.76	3.76	3.51
AEER				-	3.75	3.76	3.51
COP				W/W	4.02	4.02	3.76
ACOP				-	4.02	4.01	3.76
Energy Label / Star Ratings		Cooling		-	3.0 STAR	3.0 STAR	2.5 STAR
		Heating		-	3.5 STAR	3.5 STAR	3.0 STAR
Power Supply				Ø, V, Hz	1Ph, 220~240V, 50Hz	1Ph, 220~240V, 50Hz	1Ph, 220~240V, 50Hz
Indoor	Air Flow Rate	Max / H / M / L / SL		L/s	383 / 283 / 233 / 183	516 / 416 / 350 / 283	516 / 416 / 350 / 283
	Sound Pressure Level	Cooling, Max / H / M / L / SL		dB(A)	- / 49 / 44 / 40 / 30	- / 51 / 46 / 42 / 33	- / 51 / 46 / 42 / 33
	Dimensions (W × H × D)	Net		mm	1060 x 360 x 265	1200 x 360 x 265	1200 x 360 x 265
	Weight	Net		kg	16.6	18.50	18.50
Outdoor	Compressor			-	Twin Rotary	Twin Rotary	Twin Rotary
	Condenser	Corrosion Protection		-	Gold	Gold	Gold
	Sound Pressure Level	Cooling, Rated		dB(A)	55	55	55
		Heating, Rated		dB(A)	56	57	57
	Sound Power Level			dB(A)	66	66	66
	Dimensions* (W × H × D)	Net		mm	870 x 800 x 320	950 x 832 x 330	950 x 832 x 330
	Weight	Net		kg	55.0	67.1	67.1
	Operation Range	Cooling		℃ DB	-10 ~ 48	-10 ~ 48	-10 ~ 48
		Heating		℃ DB	-15 ~ 24	-15 ~ 24	-15 ~ 24
Field Connections							
Circuit Breaker				A	20	25	25
Power Supply Guide				No.	3 Core + Earth	3 Core + Earth	3 Core + Earth
Power Supply to Unit				-	Outdoor	Outdoor	Outdoor
Power and Communication Cable				No. x mm²	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)	4 x 1.0 (Including Earth)
Field Piping							
Piping	Size	Liquid		mm(inch)	Ø 9.52 (3/8)	Ø 9.52 (3/8)	Ø 9.52 (3/8)
		Gas		mm(inch)	Ø 15.88 (5/8)	Ø 15.88 (5/8)	Ø 15.88 (5/8)
	Connections Method	Indoor / Outdoor		-	Flared / Flared	Flared / Flared	Flared / Flared
Drain Hose Size		O.D, I.D		mm	20, 15	20, 15	20, 15
Between Indoor & Outdoor	Piping Length	Min ~ Max		m	3 ~ 30	3 ~ 30	3 ~ 30
		Pre-Charge Length		m	7.5	7.5	7.5
	Max. Elevation Difference			m	20	20	20
	Piping Connection Heat Insulation			-	Both liquid and gas pipes	Both liquid and gas pipes	Both liquid and gas pipes
Refrigerant Charge		Type		-	R32	R32	R32
		Pre Charge		g	1750	2000	2000
		Additional Charge		g/m	20	20	20
		Control		-	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve

* Dimensions do not include service valve part/cover.

DETAILED FEATURE LIST

SMART SERIES

Category	Function		WS09TWS	WS12TWS	WS18TWS	WS24TWS
Air Flow	Air Supply Outlet		1	1	1	1
	Airflow Direction Control (Left & Right)		Manual	Manual	Manual	Manual
	Airflow Direction Control (Up & Down)		6 Steps	6 Steps	6 Steps	6 Steps
	Auto Swing (Left & Right)		X	X	X	X
	Auto Swing (Up & Down)		●	●	●	●
	Fan Speed Steps (Fan / Cool / Heat		6 / 6 / 6	6 / 6 / 6	6 / 6 / 6	6 / 6 / 6
	Natural Wind (Auto Wind)		● / ●	● / ●	● / ●	● / ●
	Jet Cool / Jet Heat (Power Wind)		●	●	●	●
	Comfort Air		●	●	●	●
Air Filtration	Pre-filter (Washable / Anti-Bacteria)		●	●	●	●
	Deodorising Filter		X	X	X	X
	Micro Dust Filter		X	X	X	X
	Multi Protection Filter		X	X	X	X
	Plasma Air Filter (Ionizer)		X	X	X	X
Installation	Drain Pump		X	X	X	X
Reliability	Hot Start		●	●	●	●
	Self Diagnosis		●	●	●	●
	De-Ice Control (Defrost)		●	●	●	●
	Dry (Dehumidification) Operation		●	●	●	●
Convenience	Auto Changeover		●	●	●	●
	Auto Operation (Artificial Intelligence)		X	X	X	X
	Auto Cleaning (Coil Dry)		●	●	●	●
	Auto Restart Operation		●	●	●	●
	Child Lock[1]		●	●	●	●
	Forced Operation		●	●	●	●
	Group Control[1]		X	X	X	X
	Sleep Mode		7hr	7hr	7hr	7hr
	Timer 24hr (On/Off) / 7hr (Off)		● / X	● / X	● / X	● / X
	Two Thermistor Control[1]		●	●	●	●
	Low Ambient Operation		●	●	●	●
	Overheating Protection		●	●	●	●
	Low Heating		X	X	X	X
	Voice Control		X	X	X	X
	Smart Scan (PIR)		X	X	X	X
	LG AC Tag On (NFC)		X	X	X	X
	Outdoor Silent Mode		●	●	●	●
	Mosquito Away		X	X	X	X
	Smart Diagnosis		●	●	●	●
	Indoor Unit Display Type		Number Display	Number Display	Number Display	Number Display
	Indoor Unit Display Light		On / Off	On / Off	On / Off	On / Off
	Energy Display		●	●	●	●
Energy Saving	Energy Saving		X	X	X	X
	Energy Control		Active Energy Control	Active Energy Control	Active Energy Control	Active Energy Control
	Gen Mode		X	X	X	X
Individual Control	Wired Remote Controller (Premium)[2]		X	X	X	X
	Wired Remote Controller (Standard)[2]		X	X	X	X
	Wired Remote Controller (Simple with Mode Selection)[2]		X	X	X	X
	Wired Remote Controller (Simple without Mode Selection)[2]		X	X	X	X
	Hand-held Wireless Controller	(See Remote Controller Section)	AKB74955603	AKB74955603	AKB74955603	AKB74955603
		Setting Temperature Range (Cooling)	18~30 ℃ (64~86 ℉)	18~30 ℃ (64~86 ℉)	18~30 ℃ (64~86 ℉)	18~30 ℃ (64~86 ℉)
		Setting Temperature Range (Heating)	16~30 ℃ (60~86 ℉)	16~30 ℃ (60~86 ℉)	16~30 ℃ (60~86 ℉)	16~30 ℃ (60~86 ℉)
CAC Network Function	General Control Controller (Non LGAP)		X	X	X	X
	Network Solution (LGAP)		X	X	X	X
	Dry Contact [2]		●	●	●	●
	PDI (Power Distribution Indicator) [2]		X	X	X	X
	Outdoor Unit PI 485[2]		X	X	X	X
Special Function Kit	Wi-Fi [2]		Embedded	Embedded	Embedded*	Embedded
	Smart Inverter Monitoring System (SIMs)[2]		PSWMOZ3	PSWMOZ3	PSWMOZ3	PSWMOZ3
Others	Mode Lock		Cooling Only or Heating Only	Cooling Only or Heating Only	Cooling Only or Heating Only	Cooling Only or Heating Only
	Temperature Control		Thermistor	Thermistor	Thermistor	Thermistor
	DRED (Demand Response Enabling Device)		●	●	●	●

Note

● : Applied, X : Not Applied

- Filters are optional in some specific areas.
- [1] : This function can be operated only when the wired remote controller is connected. The applicability of each function depends on the above table.
- [2] : Optional accessories must be purchased separately. If shown as "Embedded", this function is included in product.
- The function Wi-Fi is only compatible with 2.4 GHz band. (802.11 b/g/n)
- Some specifications may be changed without notifications due to our policy of innovation.
- The air conditioner which DRED is available is capable of DRM1, DRM2 and DRM3 and complies with standard AS/NZS 4755.3.1.

DETAILED FEATURE LIST

HIGH EFFICIENCY SERIES

Category	Function		WH09SK-18	WH12SK-18	WH18SL-19	WH24SL-18	WH30SR-18	WH34SR-18
Air Flow	Air Supply Outlet		1	1	1	1	1	1
	Airflow Direction Control (Left & Right)		5 Steps	5 Steps	5 Steps	5 Steps	5 Steps	5 Steps
	Airflow Direction Control (Up & Down)		6 Steps	6 Steps	6 Steps	6 Steps	6 Steps	6 Steps
	Auto Swing (Left & Right)		●	●	●	●	●	●
	Auto Swing (Up & Down)		●	●	●	●	●	●
	Fan Speed Steps (Fan / Cool / Heat		6 / 6 / 6	6 / 6 / 6	6 / 6 / 6	6 / 6 / 6	6 / 6 / 6	6 / 6 / 6
	Natural Wind (Auto Wind)		● / ●	● / ●	● / ●	● / ●	● / ●	● / ●
	Jet Cool / Jet Heat (Power Wind)		●	●	●	●	●	●
	Comfort Air		●	●	●	●	●	●
Air Filtration	Pre-filter (Washable / Anti-Bacteria)		●	●	●	●	●	●
	Plasma Air Filter (Ionizer)		●	●	●	●	●	●
Reliability	Hot Start		●	●	●	●	●	●
	Self Diagnosis		●	●	●	●	●	●
	De-Ice Control (Defrost)		●	●	●	●	●	●
	Dry (Dehumidification) Operation		●	●	●	●	●	●
Convenience	Auto Changeover		●	●	●	●	●	●
	Auto Cleaning (Coil Dry)		●	●	●	●	●	●
	Auto Restart Operation		●	●	●	●	●	●
	Forced Operation		●	●	●	●	●	●
	Group Control[1]		X	X	X	●	●	●
	Sleep Mode		7hr	7hr	7hr	7hr	7hr	7hr
	Timer 24hr (On/Off) / 7hr (Off)		● / X	● / X	● / X	● / X	● / X	X / ●
	Two Thermistor Control[1]		●	●	●	●	●	●
	Low Ambient Operation		●	●	●	●	●	●
	Overheating Protection		●	●	●	●	●	●
	Outdoor Silent Mode		●	●	●	●	●	●
	Smart Diagnosis		●	●	●	●	●	●
	Indoor Unit Display Type		Number Display	Number Display	Number Display	Number Display	Number Display	Number Display
	Indoor Unit Display Light		On / Off	On / Off	On / Off	On / Off	On / Off	On / Off
	Energy Display		●	●	●	●	●	●
Energy Saving	Energy Control		Active Energy Control	Active Energy Control	Active Energy Control	Active Energy Control	Active Energy Control	Active Energy Control
Individual Control	Wired Remote Controller (Standard)[2]		●	●	●	PREMTB001	PREMTB001	PREMTB001
	Hand-held Wireless Controller	(See Remote Controller Section)	AKB74955603	AKB74955603	AKB74955603	AKB74955603	AKB74955603	AKB74955603
		Setting Temperature Range (Cooling)	18~30 ℃ (64~86 ℉)	18~30 ℃ (64~86 ℉)	18~30 ℃ (64~86 ℉)	18~30 ℃ (64~86 ℉)	18~30 ℃ (64~86 ℉)	18~30 ℃ (64~86 ℉)
		Setting Temperature Range (Heating)	16~30 ℃ (60~86 ℉)	16~30 ℃ (60~86 ℉)	16~30 ℃ (60~86 ℉)	16~30 ℃ (60~86 ℉)	16~30 ℃ (60~86 ℉)	16~30 ℃ (60~86 ℉)
CAC Network Function	Network Solution (LGAP)		●	●	●	●	●	●
	Dry Contact [2]		PDRYCB000, PDRY-CB100, PDRYCB400, PDRY-CB500	PDRYCB000, PDRY-CB100, PDRYCB400, PDRY-CB500	PDRYCB000, PDRY-CB100, PDRYCB400, PDRY-CB500	PQDSB1, PQDSBC, PQDSBC1, PQDSBNGCM1	PQDSB1, PQDSBC, PQDSBC1, PQDSBNGCM1	PQDSB1, PQDSBC, PQDSBC1, PQDSBNGCM1
	Outdoor Unit PI 485[2]		PMNFP14A*	PMNFP14A*	PMNFP14A*	PMNFP14A1	PMNFP14A1	PMNFP14A1
Special Function Kit	Wi-Fi		Embedded	Embedded	Embedded*	Embedded	Embedded	Embedded
	Smart Inverter Monitoring System (SIMs)[2]		PSWMOZ3	PSWMOZ3	PSWMOZ3	PSWMOZ3	PSWMOZ3	PSWMOZ3
Others	DRED (Demand Response Enabling Device)		●	●	●	●	●	●

Note

● : Applied, X : Not Applied

- Filters are optional in some specific areas.
- [1] : This function can be operated only when the wired remote controller is connected. The applicability of each function depends on the above table.
- [2] : Optional accessories must be purchased separately. If shown as "Embedded", this function is included in product.
- The function Wi-Fi is only compatible with 2.4 GHz band. (802.11 b/g/n)
- Some specifications may be changed without notifications due to our policy of innovation.
- The air conditioner which DRED is available is capable of DRM1, DRM2 and DRM3 and complies with standard AS/NZS 4755.3.1.

WHY LG AIR CONDITIONERS?

Years of Experience

LG has been keeping Australians comfortable for over 25 years. With our advanced technology and reliable heating and cooling solutions, you can count on LG to bring you comfort in your home.

Specialist Dealer Network

We have LG Specialist Dealers all across Australia. Our Dealers are experts in their field and will provide you with an obligation free quotation to deliver and install the right solution for your home.

10 Year Compressor Parts Warranty

The LG Smart Inverter CompressorTM is designed to cope with high temperatures, so great for those hot Australian conditions. With the 10 year compressor parts warranty*, you have the peace of mind that you can come home to comfort for years to come.

* 5 years parts and labour + 5 years limited parts warranty on the compressor.

Smart Technology*

LG is committed to continuous improvement of our products and incorporating the latest technology in all of our products. Our Split System air conditioners not only have features to efficiently heat or cool your come, but also technology to help make it more convenient as well such as embedded WiFi – so you can control your unit with your Smartphone, even when you're not home.

LG air conditioners are now also compatible with Google Home, enabling you to control your air conditioner with the sound of your voice.

* Product Registration using both LG Smart ThinQ app & Google app is required. Internet, Wi-Fi connection and Google account required. Data usage may apply. Controlling devices and features requires compatible smart devices. Features and services may be changed without notice. Google is a trademark of Google LLC.





CHOICE Recommended Air Conditioners

RECOMMENDED CHOICE December 2019

WH09SK-18

RECOMMENDED CHOICE December 2019

WH24SL-18

RECOMMENDED CHOICE December 2019

WH30SR-18





For more information visit
lg.com/au/split-system-air-conditioner

*The specifications, designs and information in this brochure are subject to change without notice.
Unit colours shown are as close as possible to actual unit colours. Colours may vary slightly.