
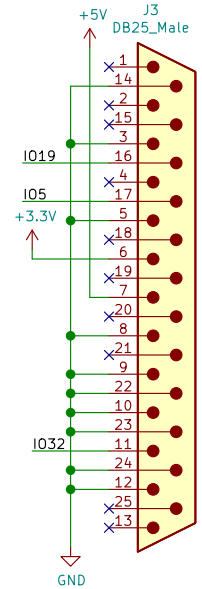












\* VB need 6V–15V supply  
As an example this schematic use a barrel jack with center pin positive.  
Adapt this to the supply you got.

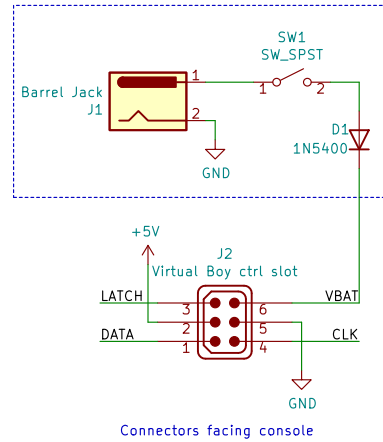

©2020–2022 Jacques Gagnon, licensed under CC–BY–4.0

Sheet: /VB/  
File: VB.sch

**Title: BlueRetro – Virtual Boy adapter cable**

Size: USLetter Date: 2022-01-10  
KiCad E.D.A. kicad (5.1.9)–1

Rev: v1.0  
Id: 17/20