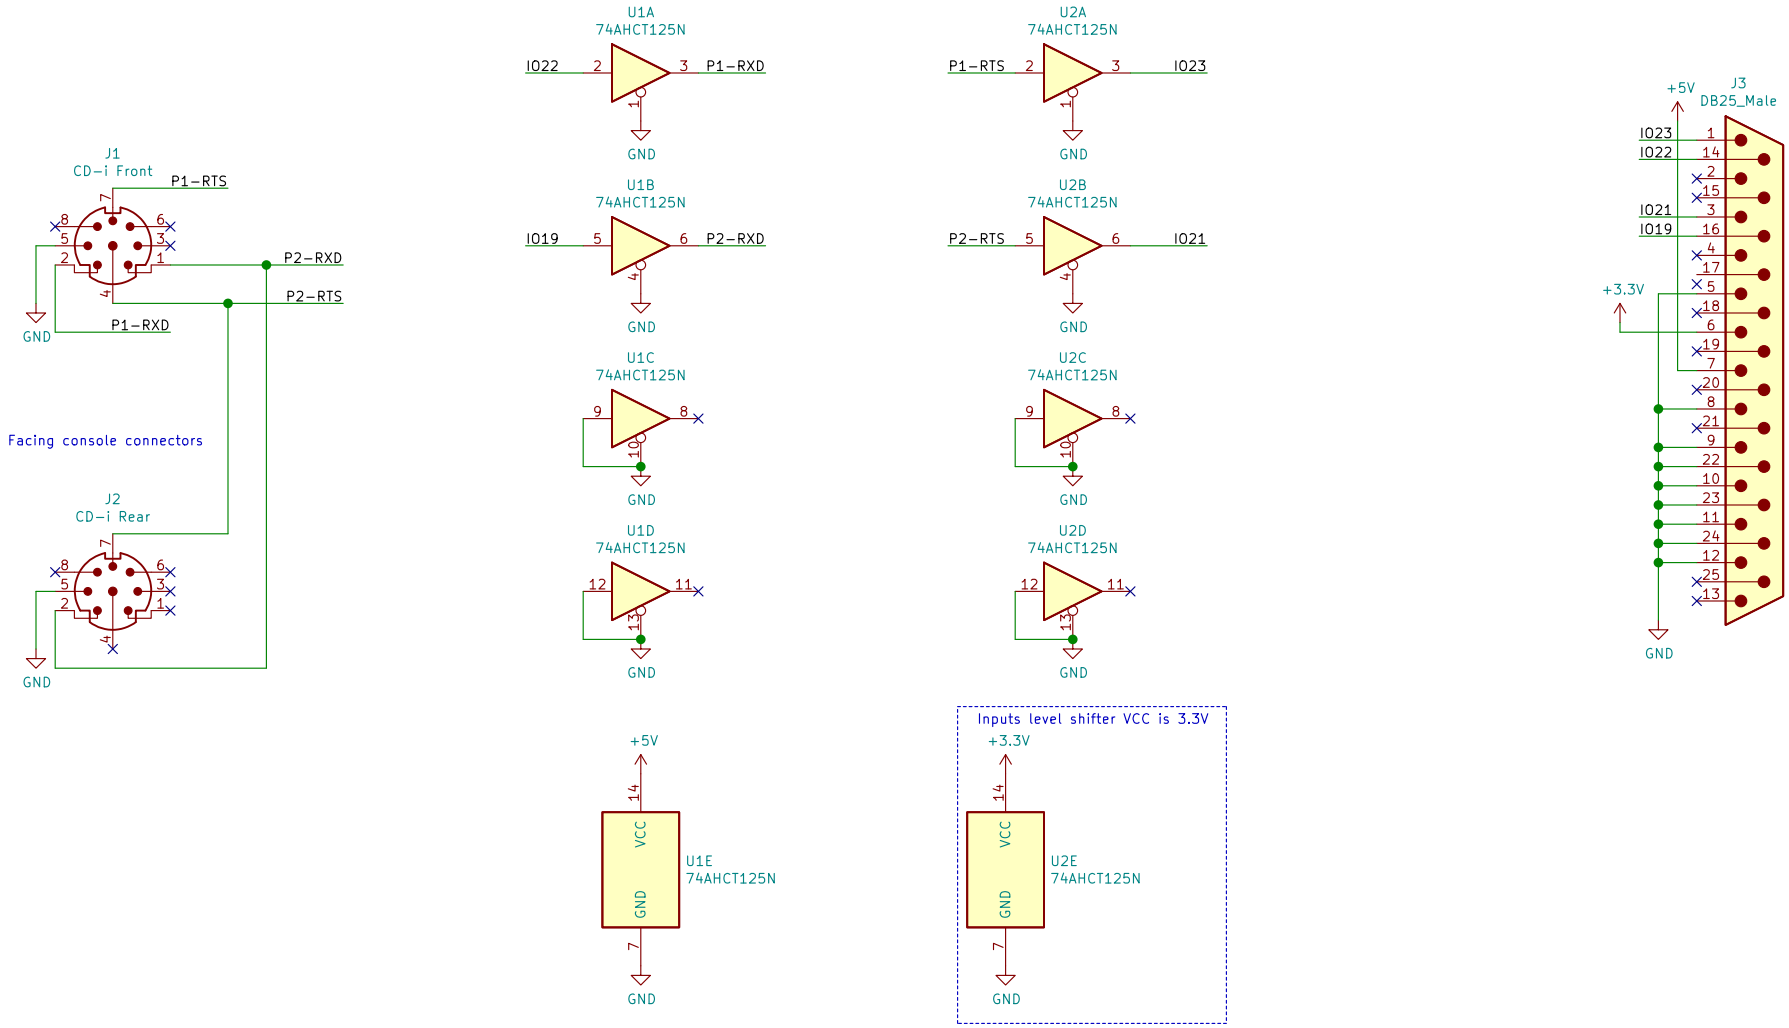

* External power required as CD-i look for peripheral once before BlueRetro is fully done reading it's config. Power up BlueRetro externally first, then 1 sec later power on CD-i.
* Do not use CD-i 5V.
* Very important for DB25 pin 22 (I39/VN) to be connect to GND for proper system detection.

©2021 Jacques Gagnon, licensed under CC-BY-4.0

Sheet: /CDI/
File: CDI.sch

Title: BlueRetro CD-i adapter cable

Size: USLetter	Date: 2021-04-11	Rev: v1.0
KiCad E.D.A. kicad (5.1.6)-1		Id: 14/15