

Four-Electrode Type Conductivity Sensor

User Manual



Yantai Winmore Trade Co., Ltd.

Address: 701 of Zhongrun Building, No. 1889 Jintan East Road, Laishan
Zone, Yantai City, Shandong, China.

Email: info@winmoreltd.com

Mobile/Whatsapp: 008615054520676

Skype: easyindustry@hotmail.com

Wechat: 1336270375

Web: www.winmoreltd.com

Introduction

Thanks for choosing Yantai Winmore Trade Co., Ltd. instrument !

Please read this manual carefully before using this product, and keep this manual in safe place for future reference.

Please follow the instructions and procedures stated in this manual.

To ensure after sales warranty coverage, please follow the user instructions and maintenance procedures stated in this manual. Any damage and lost caused by improper use of this product will not be covered by factory warranty. Please keep all documents, and if you have any questions, please do not hesitate to contact Yantai Winmore's customer services.

Remove the instrument from package material and examine it to make sure that there is no damage occurred during shipment. If there is any damage, please contact Yantai Winmore's Customer Service immediately. Save all materials until you are sure that the instrument functions properly. Any damage or defective items must be returned in their original packaging material.


W520-A Four-Electrode Type Conductivity Sensor



- ◆ Digital RS-485 output, support MODBUS
- ◆ 0~50 °C; IP68 rating
- ◆ Range: 1 uS/cm to 200 mS/cm, precision: 1%
- ◆ No polarization effect, low maintenance

- ◆ Automatic temperature compensation
- ◆ Wide range and excellent interference rejection
- ◆ PEEK sensor body and Nickel electrodes

W520-A Sensor Dimensions

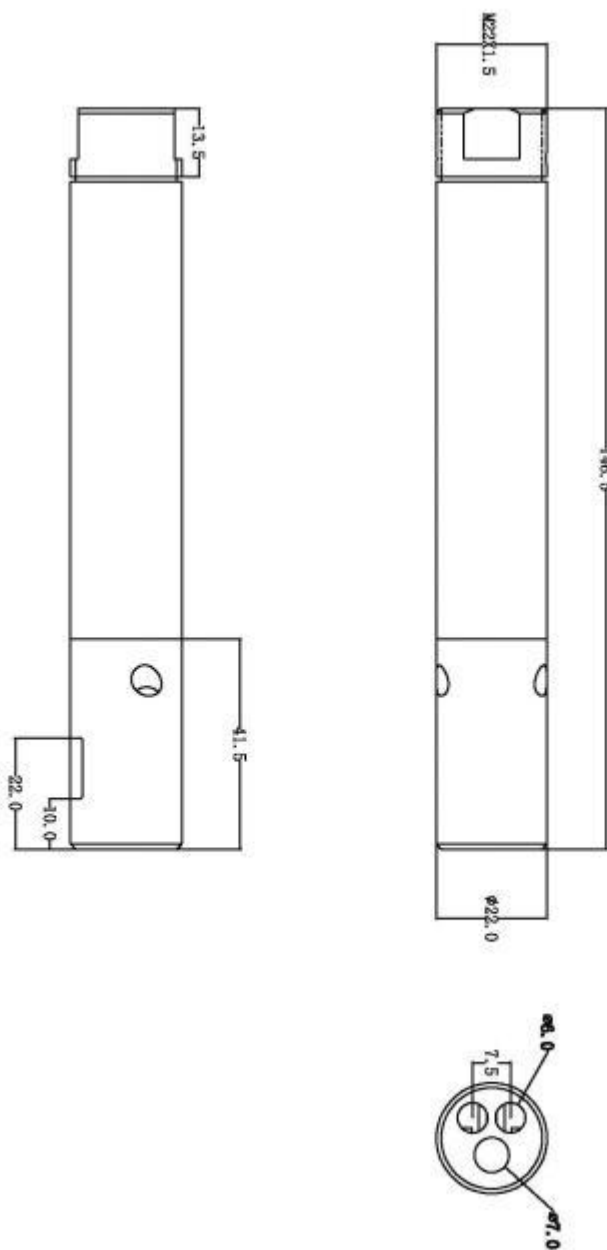

W520-A Technical Specifications

Range	1uS/cm~200 mS/cm
Response Time	10 sec
Housing IP Rating	IP68
Accuracy	1%
Working Temperature Range	0 ~ 50°C
Interface	Support RS-485, MODBUS protocols
Construction	M22x1.5
Power Requirements	DC 5~12V +/-5%, current <50mA
Temperature Sensor Type	NTC
Sensor OD	22mm
Sensor Length	146.5 mm
Cable Length	10m standard; 5m, 15m, and 30m optional
Calibrations	Support one point and two-points calibrations
Body Materials	POM and PEEK

W520-A Maintenance

1. Maintenance Schedule

Unlike traditional 2-electrode conductivity sensors, 4-electrode conductivity sensors require low maintenance.

Maintenance task	Frequency
Sensor cleaning	Every 30 days
Calibration (if required of agency)	Calibration based on required schedule

Note: Above schedule is only for reference, customers should make on their own judgment based on their applications.

2. Routine Maintenance

4-electrode conductivity sensor:

- Inspect all sensor connectors for corrosion and replace sensors if necessary.
- Inlet and outlet hole of sensor use a cotton swab or a soft cloth to wipe, for some stubborn dirt, can be added to the water in the washing liquid to wash;

Cable:

Cable's minimum bending radius is 15mm. The wires inside the cable may break if it is under long term stressed condition.

W20-A Cable

1、Sensor Dimensions

22x146.5 mm(Φ x L)

2、Power Supply Requirements

Power Supply DC 5~12V +/-5%, Current <50mA

3、Sensor Cable

4 wire AWG-24 or AWG-26 shielding wire. OD=5mm



1: Red—Power (VCC)

2: White—485 Date_B (485_B)

3: Green ---485 Date_A (485_A)

4: Black --- Ground (GND)

5: Bare wire ---- shield

Warranty

Yantai Winmore online conductivity sensor and controller are warranted for one (1) year from date of purchase against any material and manufacturing workmanship. Within the warranty period, Yantai Winmore will repair or replace, free of charge, any product that Yantai Winmore determines to be covered by warranty.

Limitation of Warranty

This limited warranty does not cover any damage, deterioration or malfunction resulting from any alternation, modification, improper or unreasonable use or maintenance, misuse, abuse, accident, neglect, exposure to fire, improper packing and shipping, lightning, power surges, or other acts of nature. This limited warranty does not cover any damage, deterioration or malfunction resulting from any unauthorized tampering with this product, any repairs attempted by anyone unauthorized by Yantai Winmore.

This limited warranty does not cover cost of shipping the product back to Yantai Winmore, or any travel cost related the repair work.



Only the original purchaser of this product is covered under this limited warranty.
This limited warranty is not transferable to subsequent purchasers or owners of this product.