Laptop ↔ optical link ↔ Raspberry Pi

Chat applications on both hosts · two STM32F303K8 nodes · bidirectional optical communication

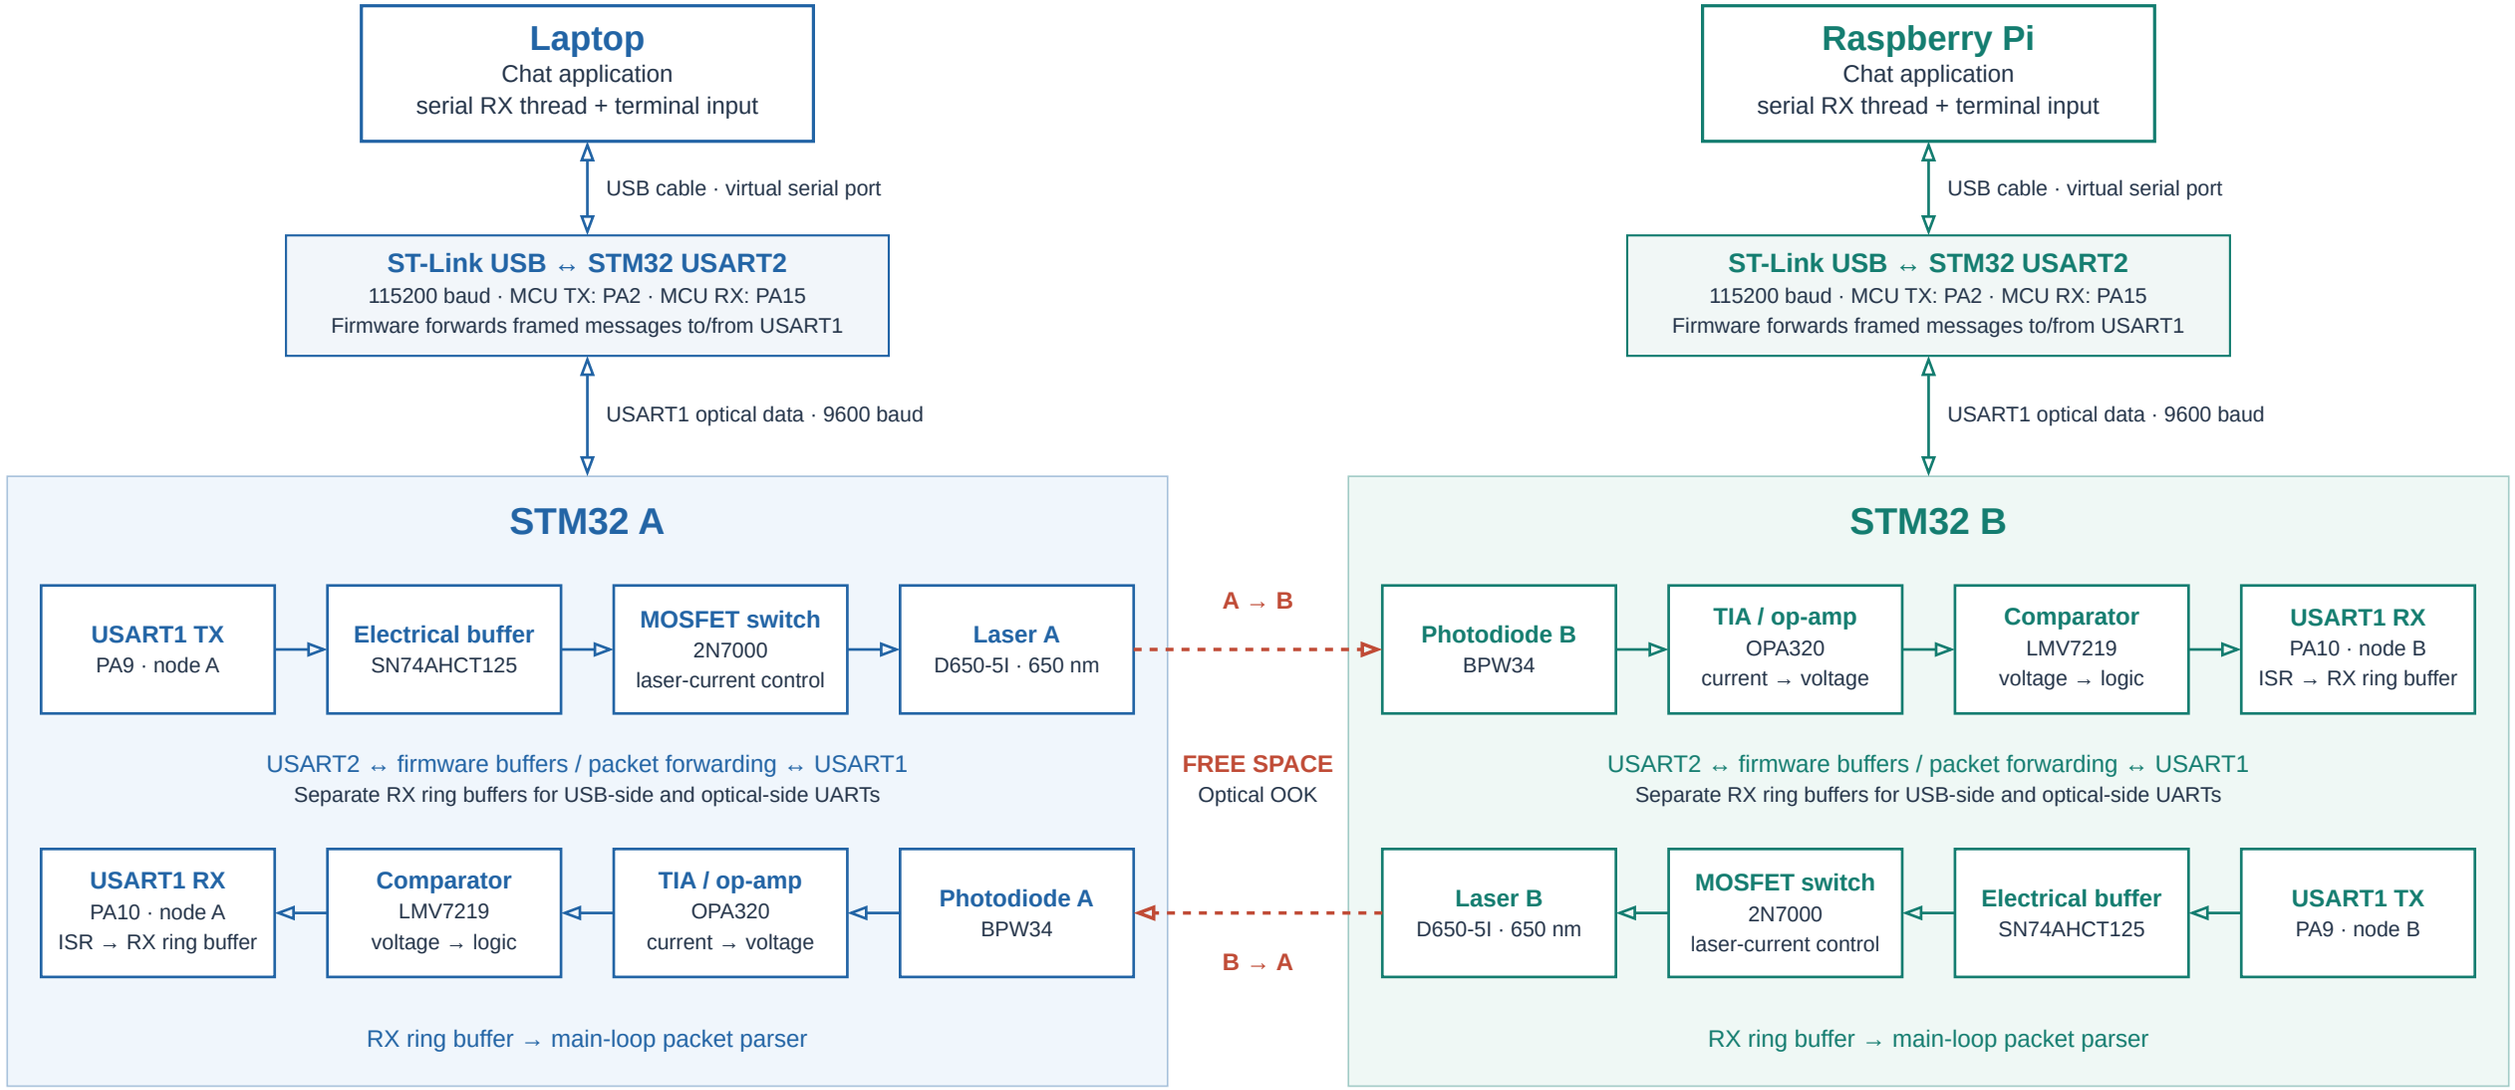

Solid arrows: electrical / data connections · Dashed arrows: light · Optical RX buffers feed packets back to the local host

Functional signal flow, not a wiring schematic. Laser current limiting, supplies, biasing, and receiver filtering are omitted.