

POWER INPUT — 1S LiPo

JST-PH (CHECK PACK POLARITY)

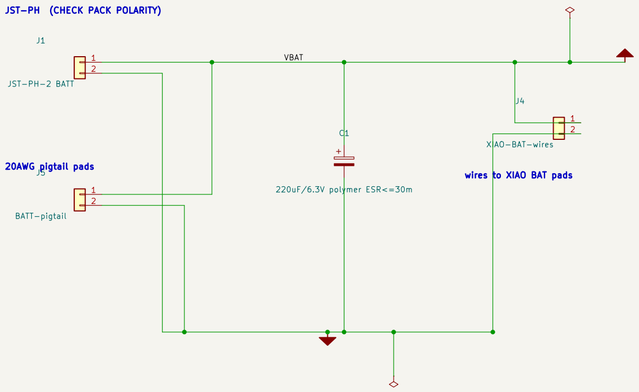


BATTERY TELEMETRY — 4.2V -> 2.1V

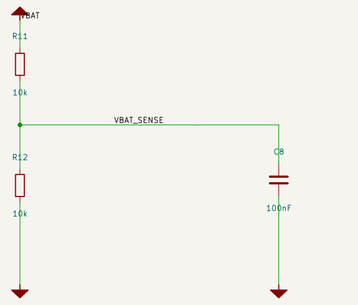


ADC anti-alias / noise filter

ALTITUDE SENSOR




Pololu VL53L1X carrier #3415, belly-down on a right-angle header

ORIENTATION LEDS

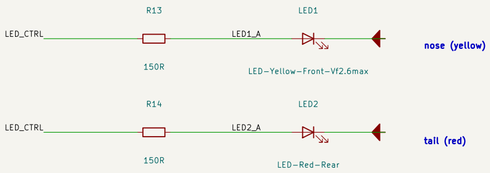


FLIGHT CONTROLLER

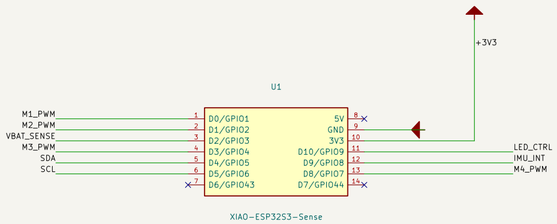


USB-C + OV2640 camera + WiFi on this module

INERTIAL MEASUREMENT UNIT

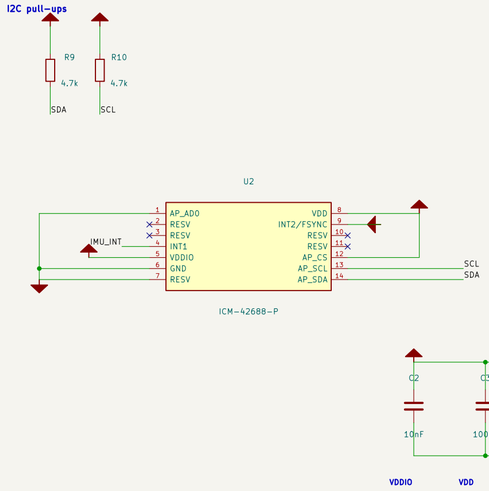


I2C mode: AD0 low -> 0x68, AP_CS tied to VDDIO

3V3 RAIL BULK — DO NOT FIT




Pads only. The XIAO's 3V3 comes from an SGM6029C buck whose datasheet specifies 5–10uF EFFECTIVE Cout; the module already carries 9.4uF. Fit only if bring-up shows the rail sagging.


MOTOR DRIVE 1 (M1)

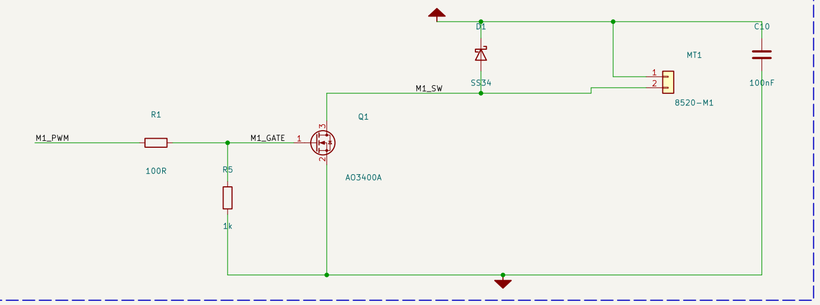


MOTOR DRIVE 2 (M2)

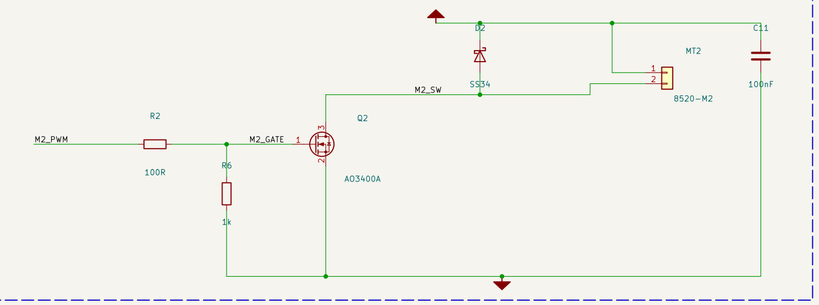

MOTOR DRIVE 3 (M3)

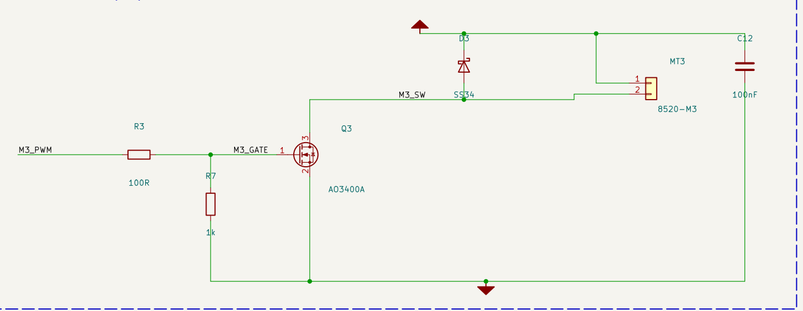

MOTOR DRIVE 4 (M4)

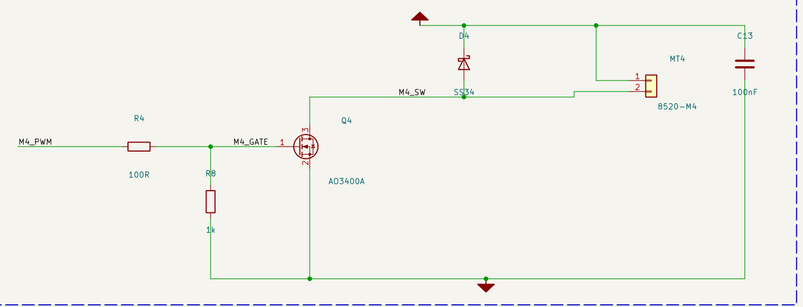

TEST POINTS — probe with module seated



Single pads, no part fitted. Meter reference for bring-up:

TP3 is the only GND a probe should ever clip to.



Verified by scripts/check_sch.py (schematic netlist vs design.py) and the PCB netlist diff

Generated from scripts/design.py — that file is the authoritative netlist

Designed by Pal

Sheet: /

File: pursuit.kicad_sch

Title: PURSUIT-1 — person-following PCB-frame micro quadcopter

Size: A2	Date:	Rev: A
KiCad E.D.A. 10.0.4		Id: 1/1