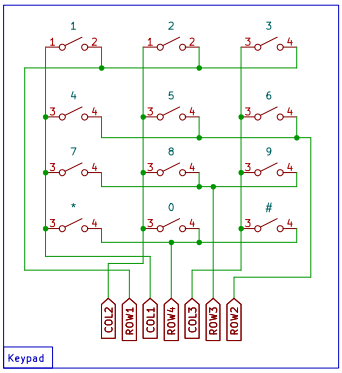

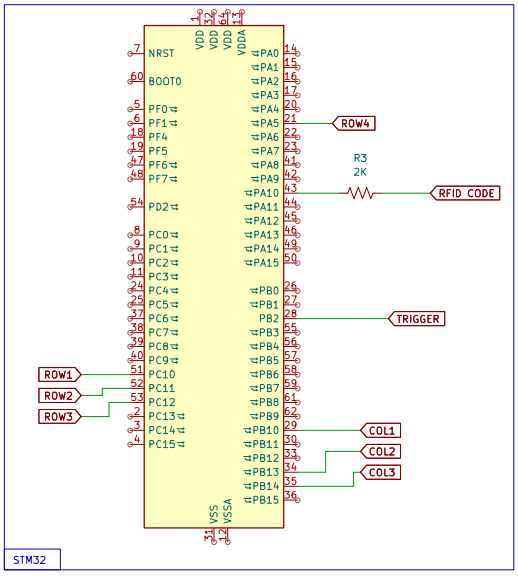

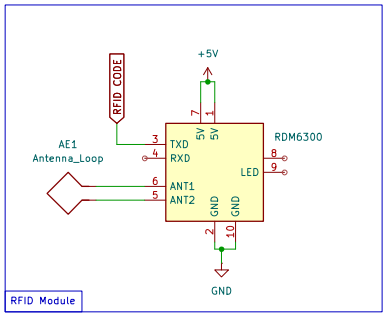

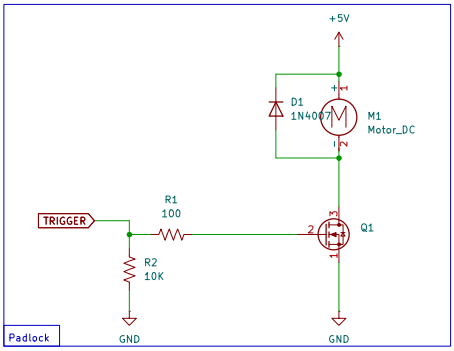

This design relies on the STM32F072 Discovery board to function as the microprocessor. It takes input from both a keypad peripheral and an RFID peripheral to verify a user and open the solenoid. The STM32 allows the user to change the passcode depending on the input of the user.

Sheet: /
File: Digital_padlock.kicad_sch

Title: Digital-Padlock

Size: A4	Date:	**Rev:**
KiCad E.D.A. 9.0.7		Id: 1/1