
Topology:

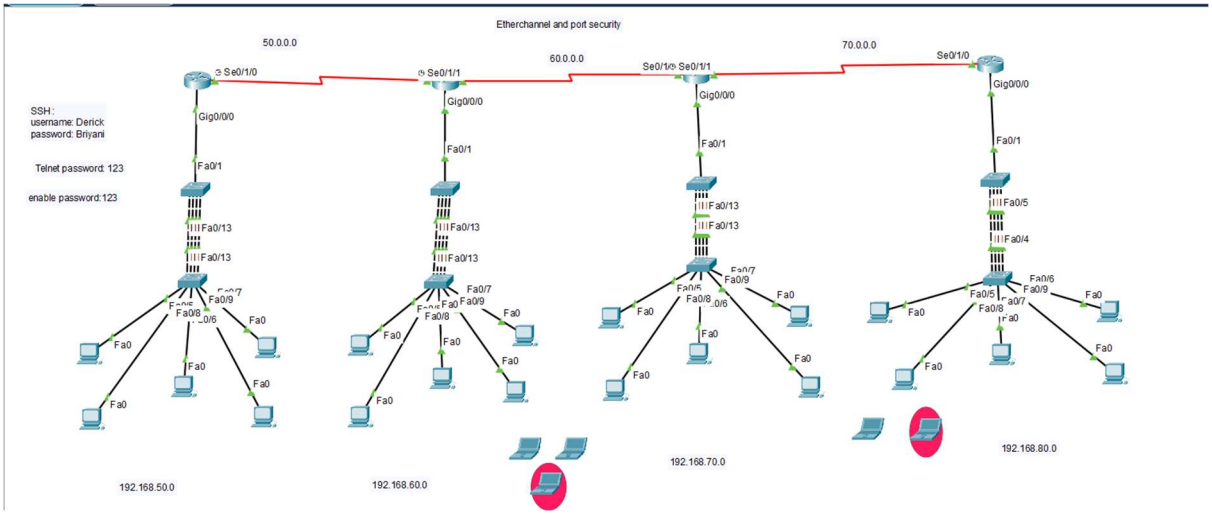

DHCP verification:

IP Configuration

DHCP	Static	DHCP request successful.
IPv4 Address	192.168.50.7	
Subnet Mask	255.255.255.240	
Default Gateway	192.168.50.1	
DNS Server	8.8.8.8	

IPv6 Configuration

Automatic	Static	
IPv6 Address		/
Link Local Address	FE80::20D:BDFF:FE50:6926	
Default Gateway		
DNS Server		

802.1X

Use 802.1X Security	
Authentication	MD5
Username	
Password	

SSH Testing:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ssh -L Derick 192.168.80.1

Password:



R4>
```

Telnet Testing:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>Telnet 192.168.70.3
Trying 192.168.70.3 ...Open


User Access Verification

Password:
Switch>
```

Ping/connectivity testing:

Successful	PC6	Switch5	ICMP	0.000	N	0	(edit)	(delete)
Successful	PC8	Switch7	ICMP	0.000	N	1	(edit)	(delete)
Successful	PC11	Switch1	ICMP	0.000	N	2	(edit)	(delete)
Successful	PC16	Switch4	ICMP	0.000	N	3	(edit)	(delete)

Port Security:

```
Switch#show port-security
Secure Port MaxSecureAddr CurrentAddr SecurityViolation Security Action
               (Count)        (Count)         (Count)
-------------------------------------------------------------------------
        Fa0/9         3           3                 0          Shutdown
-------------------------------------------------------------------------
```

Etherchannel:

```
Switch>enable
Switch#Show etherchannel summary
Flags:  D - down        P - in port-channel
        I - stand-alone s - suspended
        H - Hot-standby (LACP only)
        R - Layer3      S - Layer2
        U - in use      f - failed to allocate aggregator
        u - unsuitable for bundling
        w - waiting to be aggregated
        d - default port


Number of channel-groups in use: 1
Number of aggregators:           1

Group  Port-channel  Protocol    Ports
------+-------------+-----------+-----------------------------------------------

2      Po2(SU)           PAgP    Fa0/10(P) Fa0/11(P) Fa0/12(P) Fa0/13(P)
Switch#
```