

LAN implementation using DHCP

DHCP configuration:

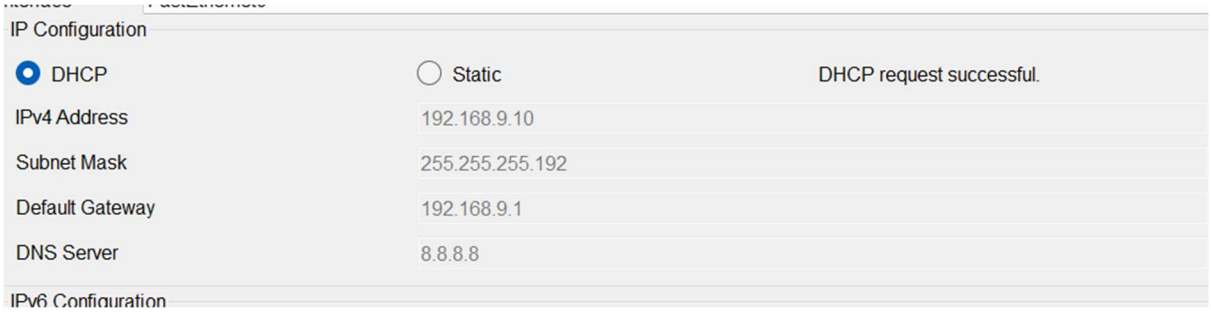

Topology:

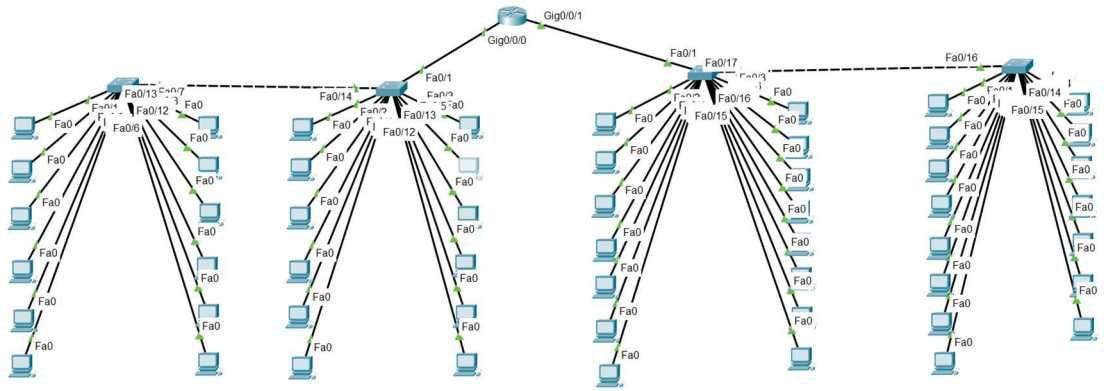

Ping Configuration:

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.9.1

Pinging 192.168.9.1 with 32 bytes of data:

Reply from 192.168.9.1: bytes=32 time=10ms TTL=255
Reply from 192.168.9.1: bytes=32 time<1ms TTL=255
Reply from 192.168.9.1: bytes=32 time<1ms TTL=255
Reply from 192.168.9.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.9.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 10ms, Average = 2ms

C:\>
```