

What (and Whom) to Avoid On the Roads

Analysis of Major Traffic Fatality Predictors

Desmond Cole

(Time Trends, Automaker/Vehicle Type, Environmental Factors,
Report Introduction, General Editing, Conclusion)

Teerth Patel

(Geographic Trends, Driver Impairment, General Editing, Conclusion)

Yunbin Peng

(Hit-and-Run)

April 16, 2018

Introduction

Executive Summary

In the United States, approximately 35-40,000 people die in vehicle-related incidents every year. The fatality rate declined significantly in the second half of the 20th century, and continued to decline in the 21st, however the decline has plateaued in recent years, to a rate of just over 1 death per 100 million vehicle miles traveled (VMT). Understanding and tackling the problem of crash fatalities has motivated considerable improvements and investments in vehicle design, road design, and scientific knowledge of human motor skills and reaction times.

With this analysis, we set out to survey the distribution of vehicle-related fatalities across geography and time, and explore a number of driver-specific characteristics to assess dominant contributors to the incidence and extent of vehicle-related deaths. We use this analysis to develop a limited profile of the circumstances associated with traffic fatalities, and a set of corresponding recommendations for the concerned motorist or non-motorist.

Data

The data used for this analysis are gathered by the National Highway Traffic Safety Administration (NHTSA), a branch of the U.S. Department of Transportation. NHTSA gathers traffic fatality data using the Fatality Analysis Reporting System (FARS), a nationwide census of various information regarding fatalities occurring in motor vehicle crashes. FARS contains a rich set of different features, with information on crash circumstances, areas of damage, police reports, emergency response times, and vehicle characteristics. We focus specifically on data from 2015 and 2016, and subset a choice set of predictors of interest, paying particular attention to the following broad indicators of driver behavior:

1. Where do they drive?
 - Key Variable: Geographic Location
2. When do they drive?
 - Key Variable: Time of Day
3. What do they drive?
 - Key Variables: Automaker, Vehicle Type
4. Are they impaired?
 - Key Variable: Drug/Alcohol Consumption
5. Do they flee collisions?
 - Key Variable: Hit-and-Run

We begin with a geographic and time-based overview of patterns of fatal traffic incidents.

Exploratory Analysis and Visualization

Geographic Patterns

(Teerth Insert Analysis Here)

Time Trends - Hourly Cycle

At the national and state level, the cycle of fatal accidents throughout the day is fairly consistent. The below plot shows aggregate fatal accidents per thousand vehicles per hour for the United States, between 2015 and 2016. To account for traffic variability, we weighted the rate of fatal incidents according to hour-by-hour traffic flow allocations estimated by Batterman, et al. (see references). These same flow allocations are used to weight state-by-state hourly trends, under the assumption that state-by-state traffic flow patterns tend to be similar.

At the state level, the daily fatal accident cycle is roughly similar. Estimating the overall traffic flow for each state using state-level vehicle registrations, combined with the flow allocations estimated by Batterman, et al. (2015), returns state-level cycles that closely mirror the overall national trend.

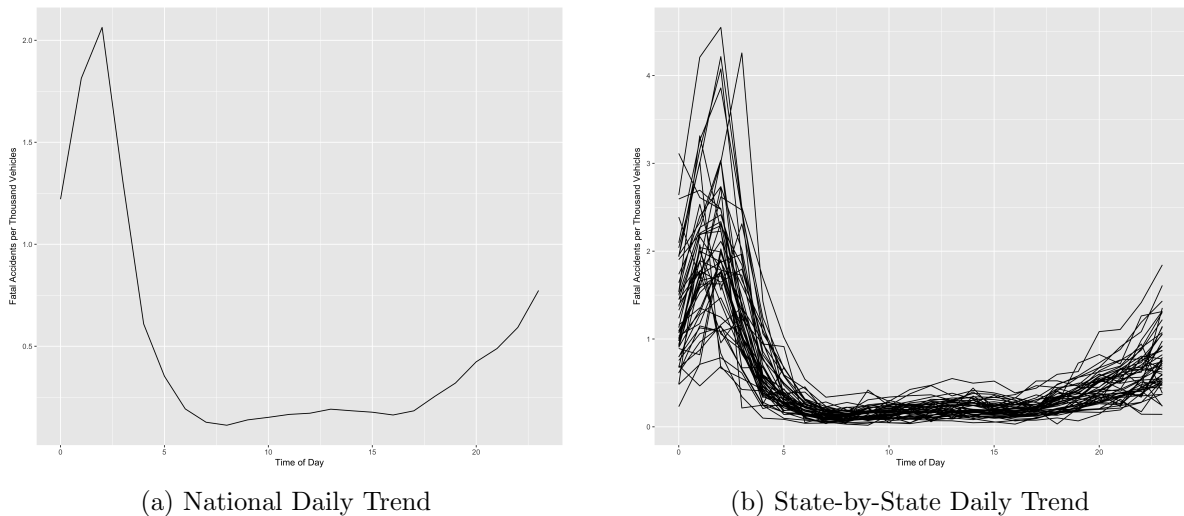


Figure 1: National and State-by-State Fatal Accident Daily Trends

To tease out potential state-level variation in daily cycles, we used shape-based time series clustering, available in R's `dtwclust` package. Roughly speaking, this method clusters different time series based on their similarity to different centroids, where a centroid in this case is some typical time trend. Further detail on relevant methods is available in work by Gravano and Paparrizos (2015). Testing different numbers of clusters yielded little overall diversity in terms of performance. A

plot of results obtained using 2 clusters is below.¹ There is little indication of significant variation across clusters, and the clustering results (and performance statistics, shown in the below table) are highly sensitive to initial randomization.

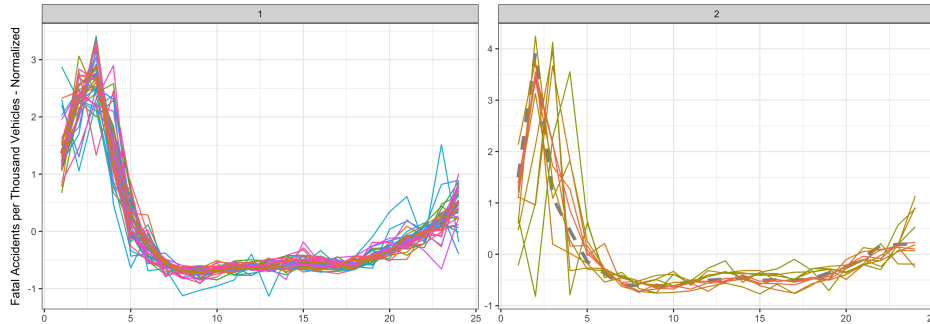


Figure 2: Clusters of States By Daily Fatal Accident Trends

NumClusters	Sil	SF	CH	DB	DBstar	D	COP
2	0.508	0.602	23.664	0.899	0.899	0.072	0.181
3	0.267	0.595	17.453	1.461	2.080	0.013	0.135
4	0.167	0.589	12.171	1.929	2.510	0.019	0.121
5	0.133	0.572	9.163	1.345	2.451	0.017	0.153
6	0.391	0.576	15.172	0.683	1.219	0.056	0.084

Table 1: Time Series Cluster Validity Indices (CVIs)

Traffic Fatality Risk Factor Analysis

We used a mix of classifiers to assess factors relevant to incident fatalities, with a particular focus on driver behavior and vehicle manufacturer. Our analysis begins with an overview of vehicle types/manufacturers, focusing on their relevance within the context of other predictors. We then separately examine different aspects of driver behavior, specifically driver impairment and whether a driver engaged in a hit-and-run during a given collision. Given that our dataset consists solely of fatal traffic incidents, we choose as a primary output incidents involving more than one fatality.

In several cases, we had to grapple with significant class imbalance. For example, there are far more single-fatality incidents than multi-fatality incidents. As a result, optimal classification in the naive setting without any resampling will occasionally identify all incidents as single-fatality.

¹Across multiple iterations, a 2-cluster separation tends to yield the best performance. For reference in the Validity Index table, optimal clustering will minimize the Silhouette (“Sil”), Davies-Bouldin (“DB” and “DBstar”) indices, and maximize the Dunn index (“D”), Calinski-Harabasz index (“CH”), and Score Function (“SF”). 2 clusters were chosen to be optimal on this basis.

Automakers

This section explores in some detail different fatality rates for different car types (by automaker, vehicle body, etc.).² For this assessment, we focused on the 15 largest automakers that together produce more than 95% of the cars and light trucks on American roads. In addition, we subsetting the data to focus specifically on smaller vehicles, excluding commercial vehicles, semi-trucks, etc.

The plot below shows a basic ranking of car manufacturers according to the number of fatalities per million vehicles. This is scaled and subsetting according to an approximation of the number and types of vehicles each manufacturer has on the road, but due to a lack of thorough data, it is likely that not all variation simply attributable to manufacturer size and vehicle class has been accounted for. With that said, this plot does suggest that there is meaningful variation across manufacturers in terms of their safety record, with makers such as Subaru and luxury makers such as BMW and Land Rover having significantly less involvement in fatal incidents than carmakers like GM, Ford, and Volvo.

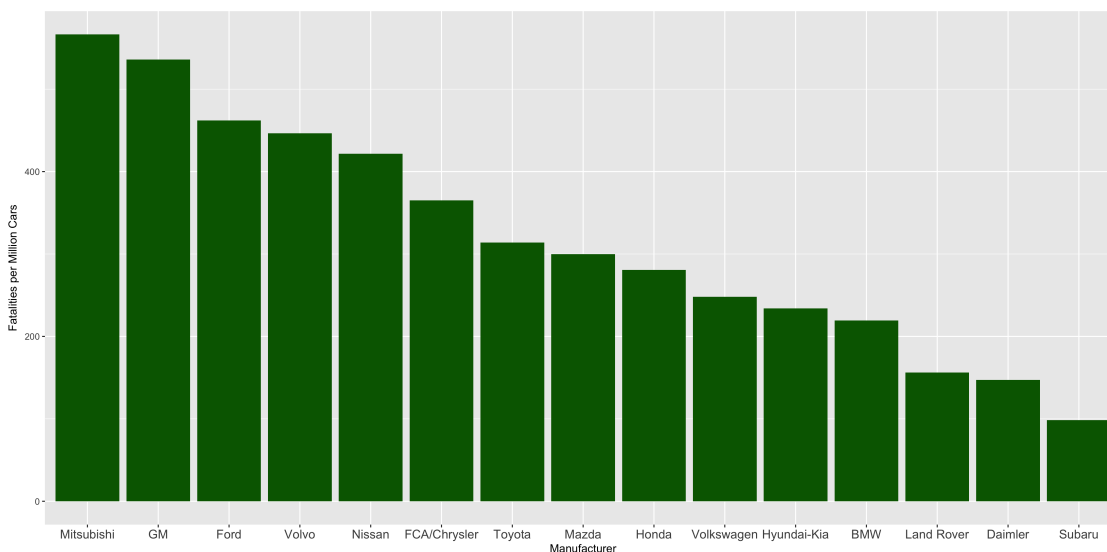


Figure 3: Ranking of Manufacturer by Fatal Accidents

Although suggestive of meaningful difference across manufacturers, a simple comparison of automakers fails to fully account for the various contextual differences across vehicle types which may be unobservable. To further explore the potential relevance of car manufacturer and car type to crash risks, we applied multidimensional scaling to visually assess the differences between vehicles in terms of various driver-specific crash-relevant pieces of information, such as use of restraints, drug/alcohol use, fires, and speeding, with the goal being to assess whether a certain vehicle type or manufacturer predicts the behavior of the vehicle's driver. To potentially support interpretation of this plot, we included in subfigure (b) a distance-based plot of different vehicle classifications

²Note that the numbers in this assessment focus on car brands *involved* in fatal incidents. Thus, they do not imply specifically that the vehicle types considered here actually caused death(s), or that the driver(s) of the vehicle(s) themselves died.

(i.e. Luxury, Non-luxury).

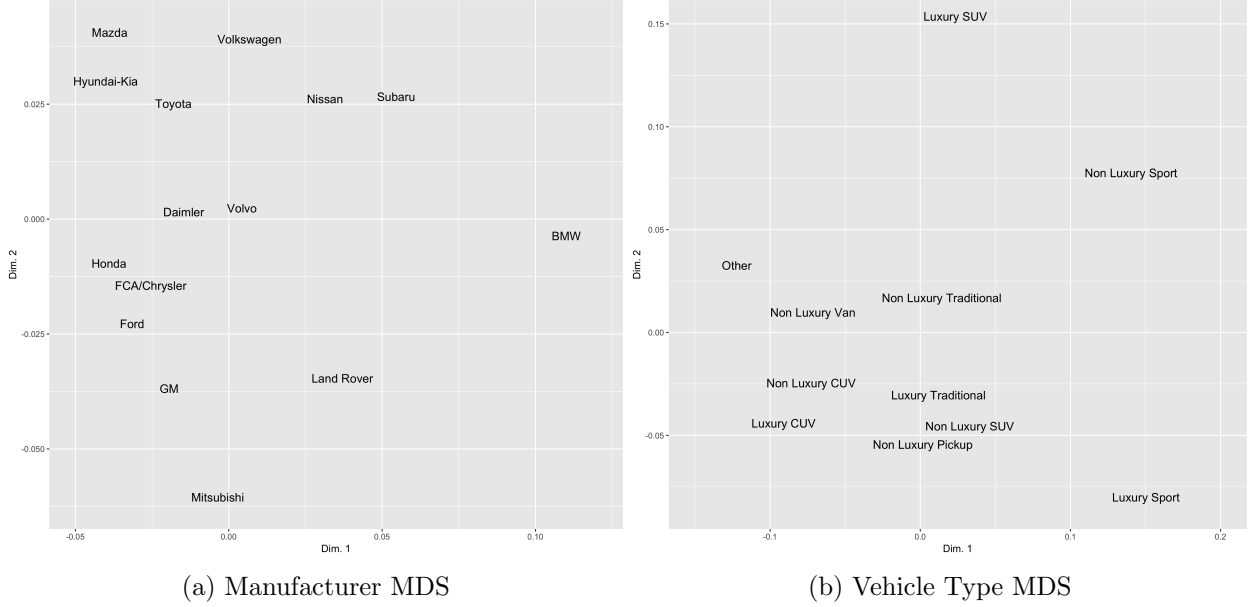


Figure 4: Multidimensional Scaling for Vehicle Manufacturer and Vehicle Type

The plots don’t indicate strong patterns of differentiation, but there are some noteworthy indicators. In particular, these results suggest that luxury sport/SUV drivers behave distinctively, as noted by the outlying values for the BMW/Land Rover³ in figure (a), and for Luxury SUV and Sport vehicles in figure (b).

To explore the relevance of automaker in the context of actual prediction, we draw on various classifiers, in order to assess (a) is there any relationship between the make of a car and the likelihood of a multi-fatality incident, and (b) how important is this relationship, when compared alongside other important indicators of driver behavior. To more easily address part (a), we employ logistic regression for ease of interpretation. For the latter point, we pursue SVM and AdaBoost-based classification for their greater predictive power.⁴

To explore this issue, we generated a binary 1-0 indicator for whether an incident involved more than 1 fatality, and tested the classification performance of a series of different models, the results of which are shown below. To overcome the class imbalance issue, we employ the resampling procedure employed by the SMOTE algorithm (for “Synthetic Minority Over-sampling TEchnique”), developed by Chawla, et al. (2002). SMOTE uses a combination of over-sampling of the minority class and under-sampling of the majority to improve class balance.

The below table shows relative test error rates for classification using logistic regression, support vector machine, and adaptive boosting methods.

³Note that this analysis considers all Jaguar models to manufactured by Land Rover

⁴Note again that the data in this report are drawn solely from accidents involving at least one fatality. Therefore, classification of multi-fatality accidents are predicting the likelihood of such an outcome, *given that a fatal accident has already occurred*.

	Logistic Regression	Supp. Vec. Machine	AdaBoost
Accuracy	0.75	0.80	0.79

Table 2: Test Set Prediction Accuracy

Logistic Regression

The table immediately below shows odds ratio coefficients for each of the automakers considered in this analysis, with BMW as the omitted reference category. A negative coefficient indicates a decreasing likelihood of a multi-fatality wreck, while a positive coefficient indicates the opposite. Some similarities to Figure 3 above jump out. Subarus and Land Rovers, for example, are here associated with relatively low probability of multi-fatality wrecks. However, these results suggest, contrary to what we might have assumed from Figure 3, that Volkswagens, Hondas, and Mazdas have the highest positive relationship with the probability of high fatality. Both analyses, however, point to a common conclusion that the typical concerned motorist or non-motorist should feel more secure around Subarus and luxury car brands, and less so around vehicles produced by the largest automakers (Ford, etc.).

Odds Ratio	Automaker
0.85	Volkswagen
0.70	Honda
0.62	Mazda
0.50	Ford
0.41	Toyota
0.39	Volvo
0.39	FCA/Chrysler
0.33	GM
0.27	Hyundai-Kia
0.21	Mitsubishi
0.10	Daimler
0.06	Nissan
-0.07	Subaru
-0.34	Land Rover

Table 3: Automaker Odds Ratios for Predicting Multi-Fatality Accident (Relative to BMW)

The below table consists of estimates of odds ratios for the other predictors considered in the logistic regression, in order to indicate their relationships with the outcome when controlling for a vehicle’s make. Their relevance is discussed in greater detail below. In brief, there are some fairly common sense results here, such as that not wearing any restraint, driving too fast, being distracted, and consuming drugs/alcohol are all habits positively associated with the probability that a fatal wreck led to multiple deaths. Some other more curious results emerge, as well. For example, a higher record of previous crashes, DWI convictions, and license suspensions/revocations is actually negatively correlated with the likelihood of high fatality.

Odds Ratio	Variable
0.26	Distracted
1.40	On Drugs
0.73	No Restraint
0.85	Hit-and-Run
0.66	Speeding
-0.29	Previous Recorded Crashes
-0.33	Previous DWI Convictions
-0.04	Prev. Rec. Suspensions/Revocations
0.01	Travel Speed
0.66	Drunk
0.68	Inclement Weather
0.44	Intersection
-0.00	Hour of Crash

Table 4: Predictor Odds Ratios

SVM and AdaBoost

For our concerned motorist or non-motorist, it is worth addressing the level of attention that should actually be paid to the make of a given car, relative to other factors such as intoxication or distracted driving. To investigate this issue, we reference the below output, which illustrates variable importance rankings for the SVM and AdaBoost classifiers. The models don't completely agree on relative variable importance, but there are some key patterns. For example, key for both models is the fact that the hour of crash is a dominant predictor of the likelihood a fatal accident resulted in multiple deaths. In addition, a driver's record, potential drug use, and driving speed are especially significant for predicting multi-fatality accidents. Interestingly, whether or not a driver was distracted (using a cellphone, for example), and whether the weather was clear or not, appear to be relatively less significant determinants of the likelihood that a fatal accident involved multiple deaths. Further assessment of this question would consider the affect of these less important predictors on non-fatal accidents, as well as fatal ones. Finally, this analysis suggests that, within the context of other fatality-relevant predictors, automaker (labeled as "Makers" in the plot) is relatively unimportant. Accounting for various driver behaviors captures much of the meaningful risk in multi-fatality wrecks.

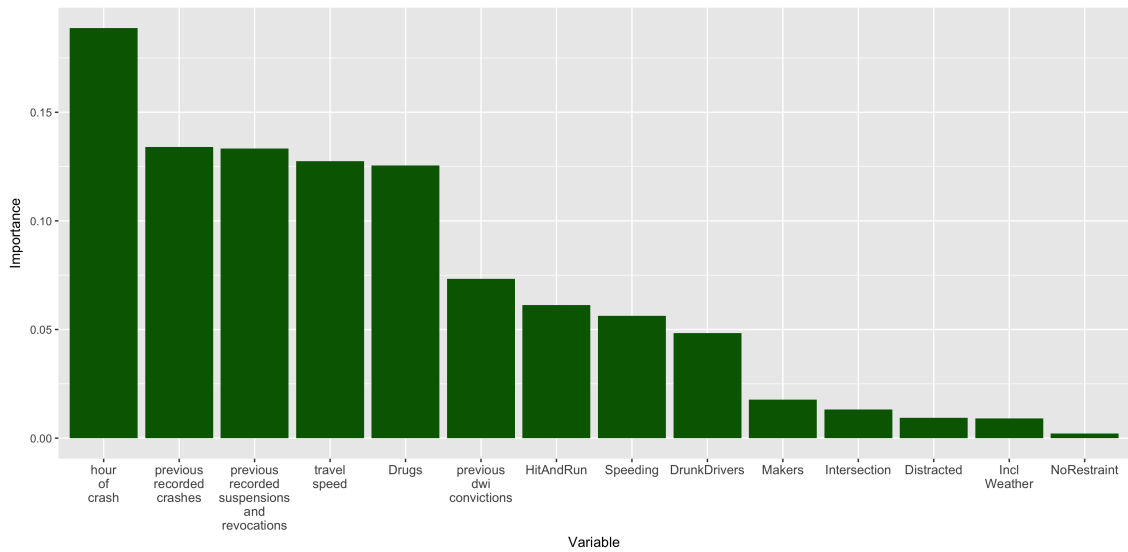


Figure 5: Variable Importance - Support Vector Machine

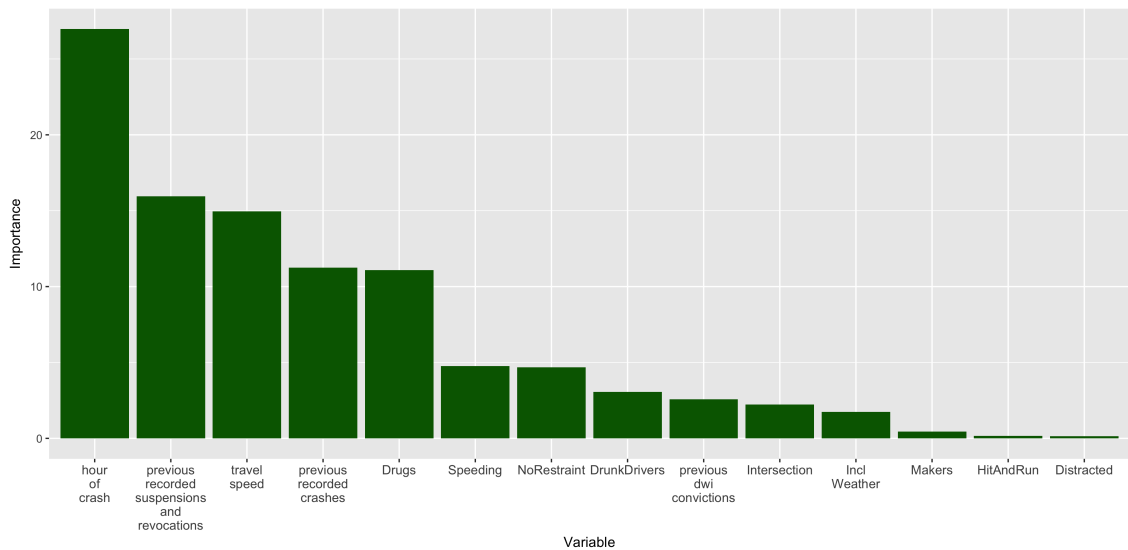


Figure 6: Variable Importance - AdaBoost Algorithm

The below two sections explore in further detail the issues of driver impairment and hit-and-run incidents.

Driver Impairment

(Teerth Insert Analysis Here)

Hit-and-Run

In this section we will discuss hit-and-run behavior as it brings more risk of fatalities during traffic accidents. According to a 2014 NHTSA traffic safety factsheet (see references), nearly one in five pedestrians killed in traffic crashes were involved in hit-and-runs. As such, it is an especially relevant factor to consider for non-motorists. To assess relationships of various predictors with hit-and-runs, we run a logistic regression, with a binary 0-1 indicator for hit-and-run as the outcome, and representative driver behavior and natural features such as spending, past driving history and time of the accident are used as independent variables. We employ logistic regression primarily because the focus is on inference rather than prediction. where hit-and-run as dependent variables . With some model selection, we get the following regression result.

Hit-and-runs are a relatively rare event. Thus, we again employed resampling techniques to adjust for class imbalance, oversampling the minority class (hit-and-run = 1) and undersampling the majority class (hit-and-run = 0). In comparing resampled data (results shown below) with the original imbalanced data set, there did not appear to be significant difference in coefficient estimates.

	<i>Dependent variable:</i>
	Hit-and-Run
Distracted	0.216*** (0.025)
Drugs	0.307*** (0.048)
MultiFatality	−1.059*** (0.050)
Speeding	1.018*** (0.029)
Previous Recorded Crashes	0.004 (0.020)
Previous DWI Convictions	0.777*** (0.040)
Previous Recorded Suspensions and Revocations	0.158*** (0.007)
DrunkDrivers	0.110*** (0.028)
Daytime	−0.816*** (0.032)
Evening	0.153*** (0.031)
Constant	−1.270*** (0.030)
<i>Note:</i> Standard error is in bracket	
*p<0.1; **p<0.05; ***p<0.01	

Table 5: Predictors of Fatal Accidents Involving Hit-and-Runs

The results above suggest that speeding, previous DWI convictions and drug use are positively correlated with hit-and-runs. There is also a significant reduction in probability of hit-and-runs during the daytime (7am to 6pm) compared with the night and evening.

It is interesting to note that the indicator of multiple fatalities has a significantly negative coefficient. This may be due to the fact that hit-and-runs are commonly involved in collisions with pedestrians, which may be less likely to result in multiple fatalities when compared with multi-vehicle collisions. In addition, a multiple-fatality crash might mean a severe crash that is more likely to total a given car, preventing the driver from fleeing the crash.

Environmental Factors

The concerned motorist may also worry about the weather, in addition to the issues we have considered throughout this report. A proper analysis of environmental factors is both beyond the scope of this analysis, and requires incorporating a richer set of weather data than the handful of indicators available in the FARS system. A quick initial check of the relevance of environmental conditions doesn't return many relevant results. The plot below shows data from Cook County, Illinois, chosen for its high number of traffic fatalities and variable weather⁵. The vast majority of fatal collisions occur in clear weather, which is due in large part no doubt to the fact that it is simply clear much more often in Chicago than it is rainy or snowy!

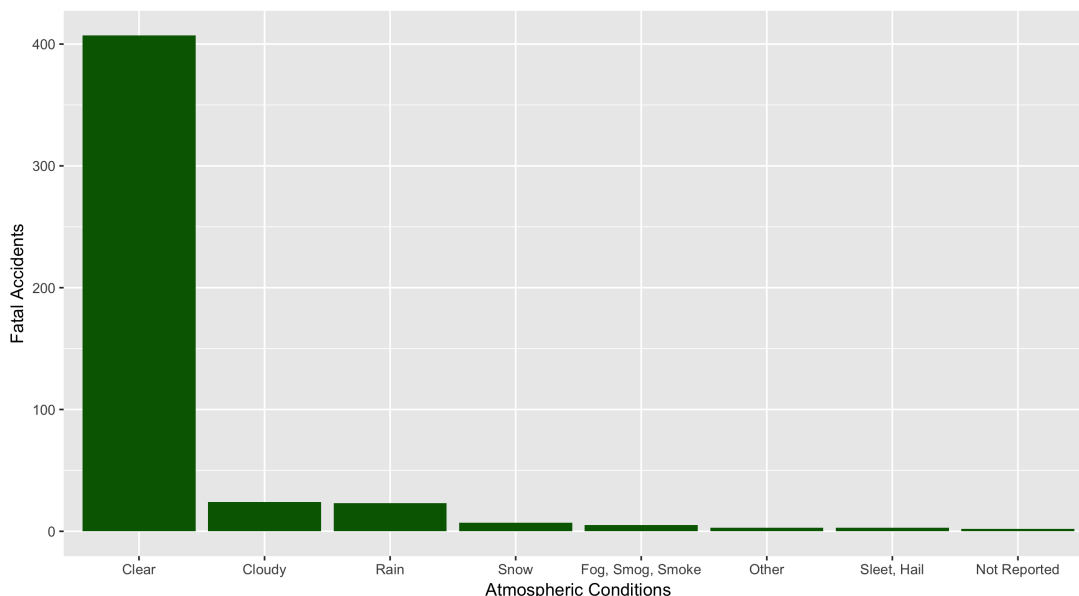


Figure 7: Fatal Accidents in Cook County, by Atmospheric Condition

Conclusion

(To be further updated once geographic analysis is incorporated)

Many of the issues considered in this analysis will likely already have been considered by the well-prepared motorist or non-motorist. However, they bear repeating, alongside some recommendations that may surprise the average reader. In particular:

Where to Drive: (TEERTH)

When to Drive: Fatality rates are consistently highest between midnight and 5AM throughout much of the country. The hour of a crash is also a key determinant of the probability that an accident results in multiple fatalities.

⁵Especially when compared to Dallas, Phoenix, and LA County

Which Cars to Avoid: Steer clear of the largest automakers, and rest easier among Subarus, BMWs, Jaguars, and Range Rovers.

Which Drivers to Avoid: Drivers on drugs or alcohol, distracted drivers, drivers not wearing seatbelts, and drivers traveling at high speeds.

References

- Batterman, Stuart, Richard Cook, and Thomas Justin. "Temporal variation of traffic on highways and the development of accurate temporal allocation factors for air pollution analyses." *Atmos Environ.* Apr. 2015.
- Chawla, Nitesh, Kevin Bowyer, Lawrence Hall, and W. Philip Kegelmeyer. "SMOTE: Synthetic Minority Over-sampling Technique." *Journal of Artificial Intelligence Research.* 2002.
- Choi, Eun-Ha. "Crash Factors in Intersection-Related Crashes: An On-Scene Perspective." *U.S. Department of Transportation - National Highway Traffic Safety Administration.* Sept. 2010.
- Gravano, Luis and John Paparrizos. "k-Shape: Efficient and Accurate Clustering of Time Series." *SIGMOD.* June 2015.
- Zador, P.L, S.A. Krawchuk, and R.B. Voas. "Relative Risk of Fatal Crash Involvement by BAC, Age, and Gender." *U.S. Department of Transportation - National Highway Traffic Safety Administration.* Apr. 2000.
- "National Motor Vehicle Crash Causation Survey: Report to Congress." *U.S. Department of Transportation - National Highway Traffic Safety Administration.* July 2008.
- "2014 Traffic Safety Factsheet Pedestrians." *U.S. Department of Transportation - National Highway Traffic Safety Administration.* May 2016.