Figure 3: IEEE 8-Bus Test System with DOCR Placement (0% PV)

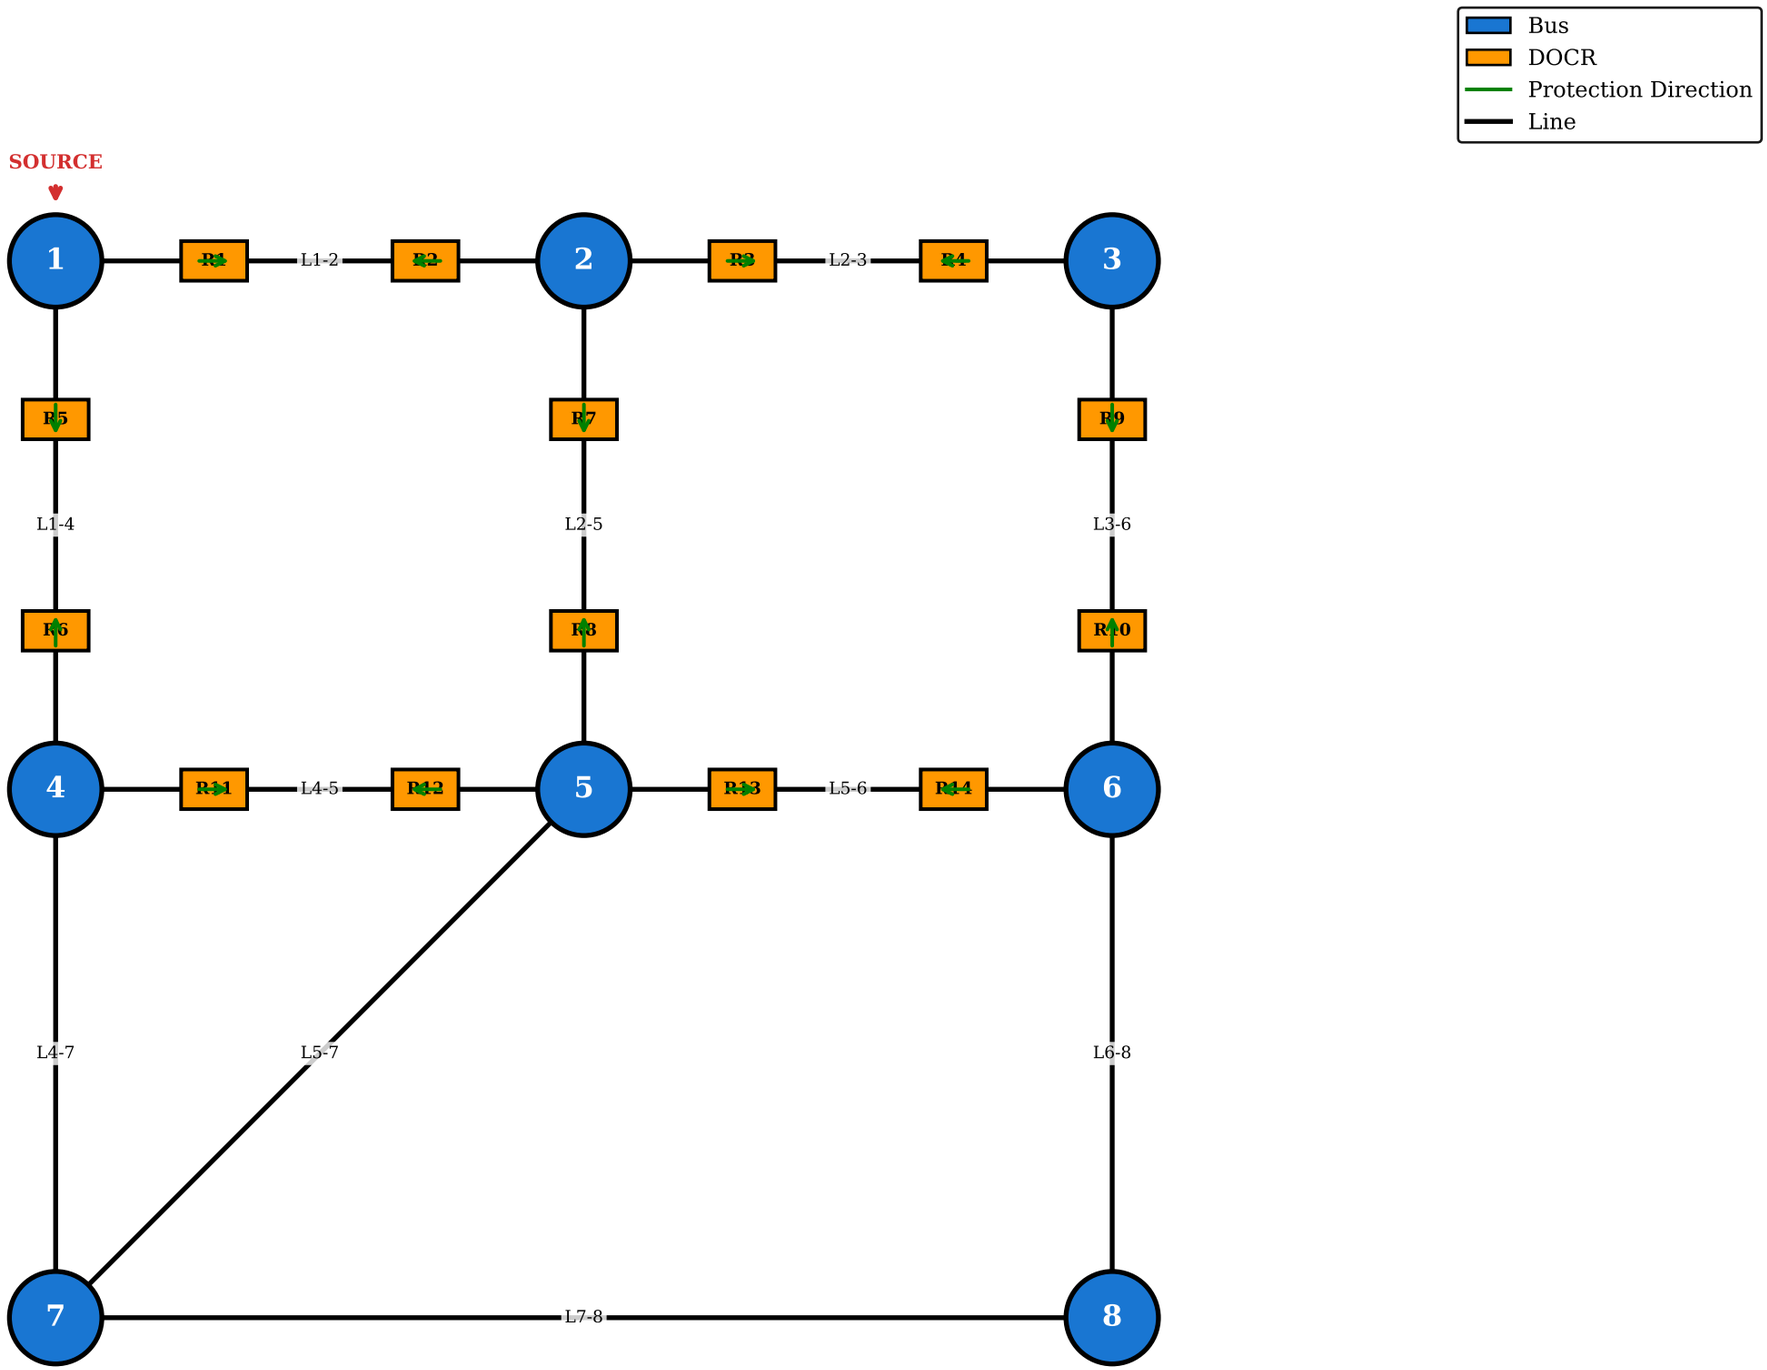

System Parameters:
- Buses: 8 | Relays: 14 | P/B Pairs: 20
- CTI ≥ 0.30 s | TMS ∈ [0.05, 1.1]
- Standard Inverse: t = TMS × 0.02 / ((I/I_pickup)^0.02 - 1)
- Source: Bus 1 (slack) | Load buses: 4, 5, 6, 7, 8