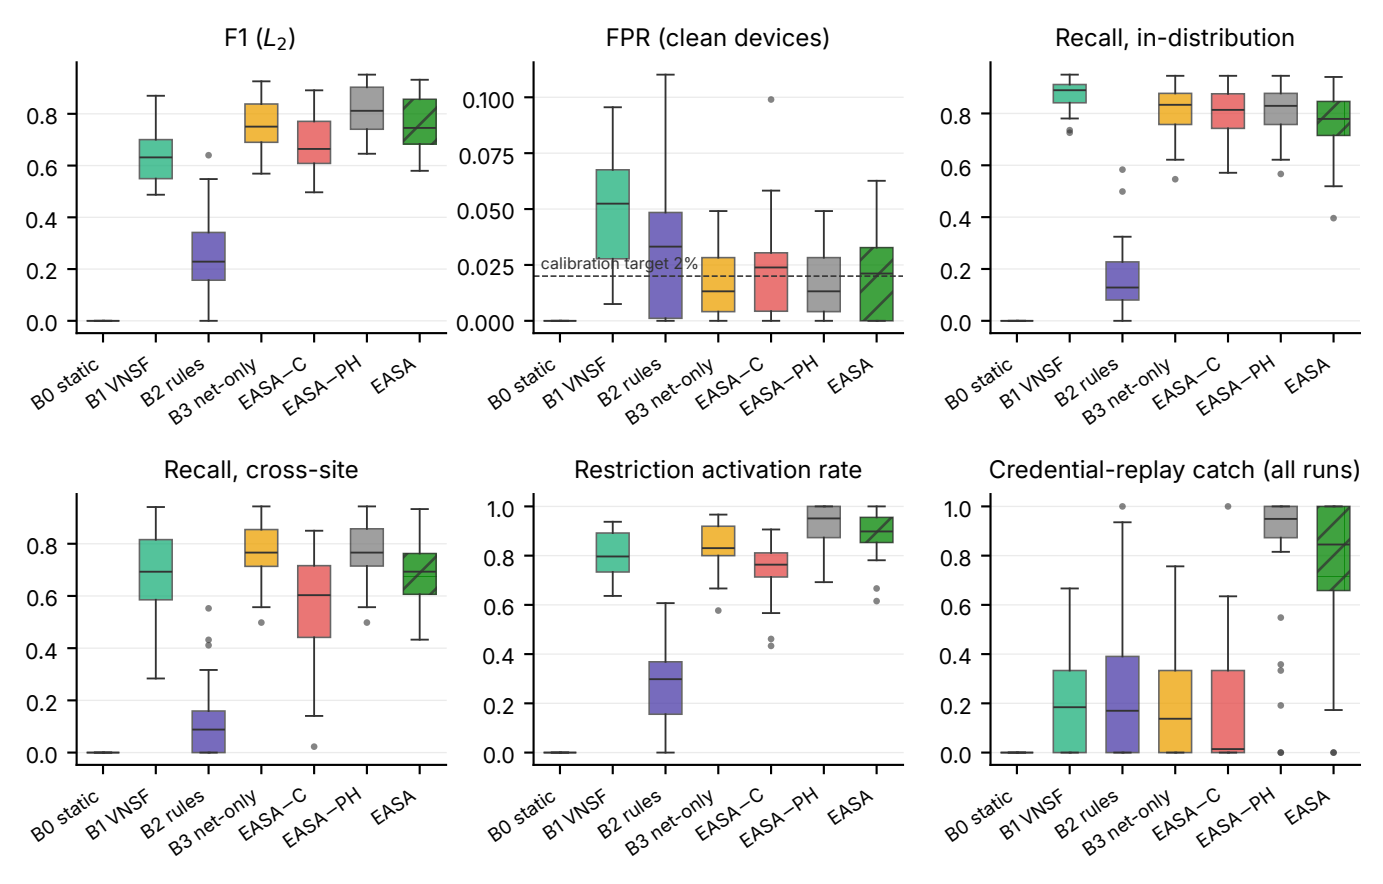
F1 (L_2)
FPR (clean devices)
calibration target 2%
Recall, in-distribution
Recall, cross-site
Restriction activation rate
Credential-replay catch (all runs)
B0 static
B1 VNSF
B2 rules
B3 net-only
EASA–C
EASA–PH
EASA