Base Station Configuration

1. After 30 seconds of plugging in the base station, it will start up and send out a wifi signal. The wifi name is eslap - the last four digits of the base station's MAC address. (If the phone/computer does not detect the signal sent by the base station, please turn off the wifi function and then turn it back on.) As shown in the following figure:

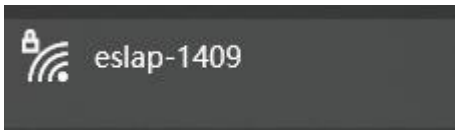

2. Connect to the base station WiFi with your phone or computer, and the WiFi password is: 12345678

Open the browser on your phone/computer and enter http://192.168.66.1 (Recommended to copy) Then go to the login page, username root, password 123456, and enter this page, click wifi:

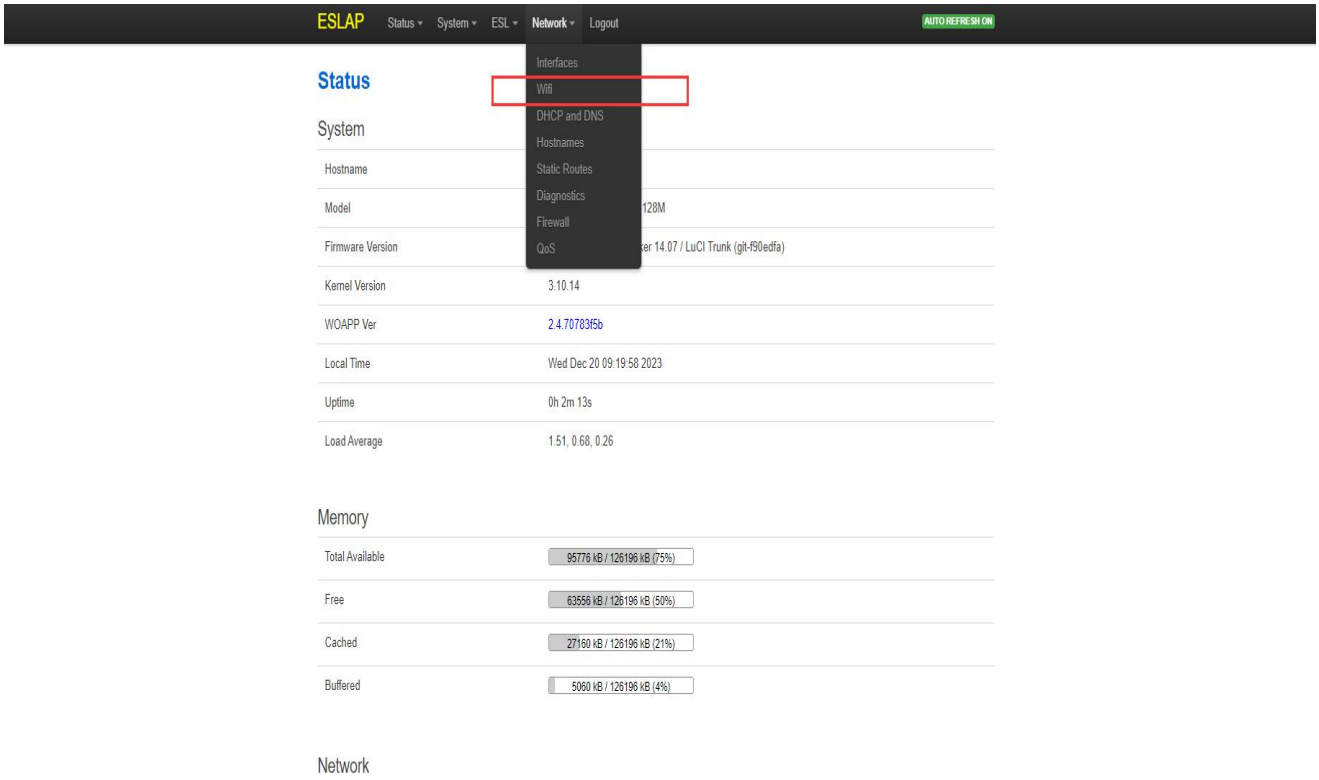

3. Click on the first selection box and choose （Bridge）

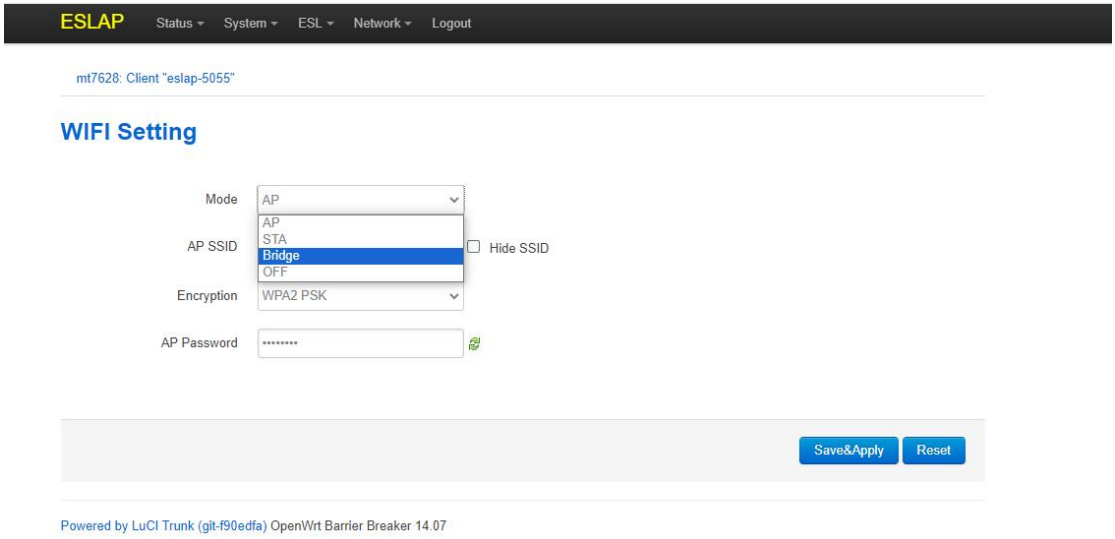

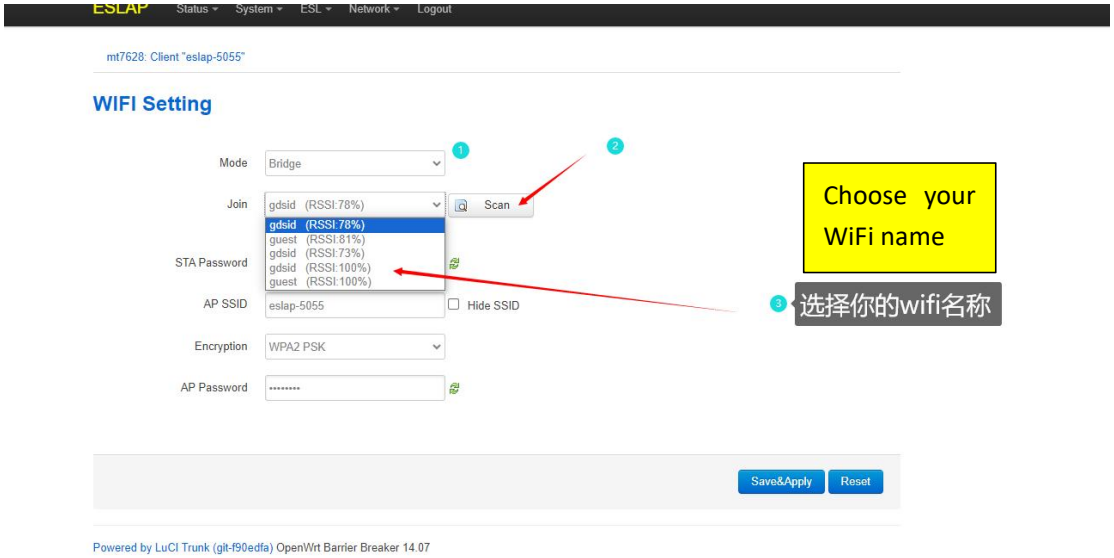

4. Finally, click save&apply.