



Rev No.	Version note:	Date	Signature	Approved
---------	---------------	------	-----------	----------

Drawing 1

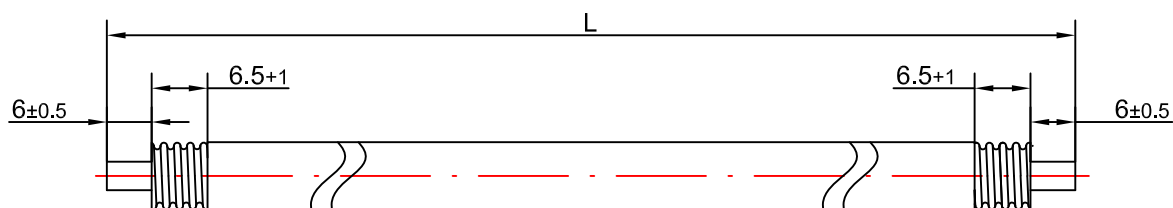

Drawing I

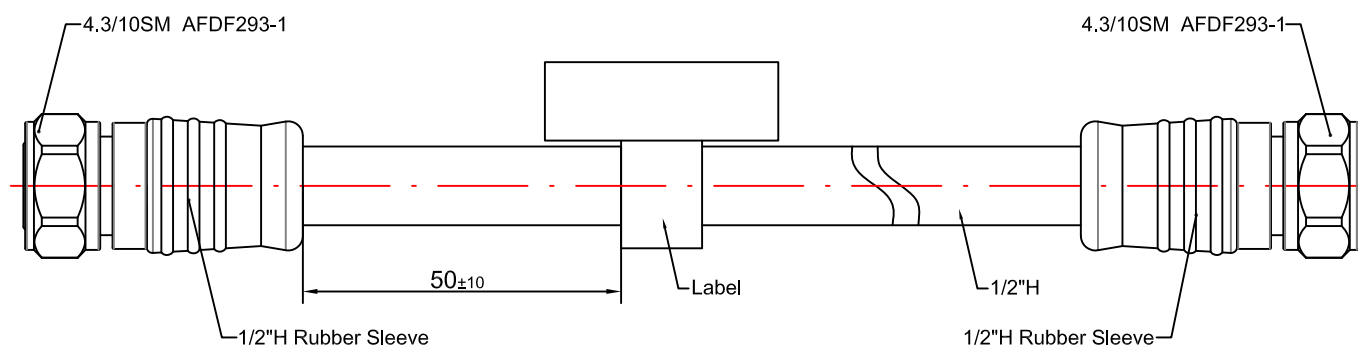

Technical performance:

1. Normal impedance: 50Ω
2. Frequency range: DC~6GHz
3. Return loss:
≤-28dB(DC-3GHz)
≤-19dB(3-6GHz)
4. PIM (2X43dBm): ≤-163dBc(700MHz spot-check 10%,
2600MHz full-check)
5. Insertion loss (dB): ≤See the table
(2.7GHz, Both connectors test)
6. Insulation resistance: ≥5000MΩ(DC/500±50V)
7. Proof voltage: 1000V (AC50Hz)

1、Nokia Product Label:
(Font:Arial Narrow Bold, print on both sides)

Specification: Code 128 Auto. details:1PCS75202.04 (1P) is fixed content.
CS75202.04 is Nokia Item code.

(N)P is fixed content.
CS75202.04 is Nokia Item code.

(S) KL is fixed content. 0001 is Serial No.

Specification: Code 128 Auto. details:
SKL0001(SKL is fixed content, 0001 is Serial No.)

NOKIA Nokia Solutions and Networks
Barcode
(1P) CS75202.04
(S) KL0001
Barcode
Made In Mexico

1/2" JUMPER CABLE
20 symbol

Jumper cable style

Details: I) >061PCS75202.04 SKL0001
IIVLENNNAI.CN 16020150615
CS75202.04 is Nokia Item code
0001 is Serial No.
20150615 is Manufacturing date YYYYMMDD

P/N.	L (mm)	IL (dB)	Product description
K576-8.3/0135	3000 ⁺³⁰ ₋₁₀	0.79	4.3/10SM-4.3/10SM 1/2"H Fuyang Cable 0.14 3m (Special for Nokia)

				 Fuyang Mexico		
DRAWN		Description 4.3/10SM-4.3/10SM 1/2"H		Drawing No.	Ver.	Rev.
CHECKED				FMK576-8	3	0
APPROVED		Sheet 1/1	Metric mm			