



Rev No.	Version note:	Date	Signature	Approved
---------	---------------	------	-----------	----------

Drawing I

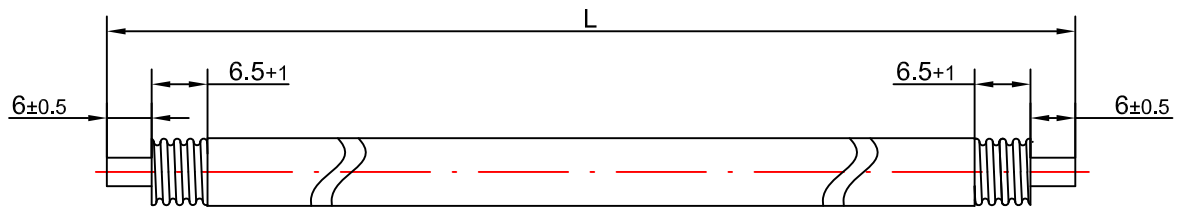

Drawing I

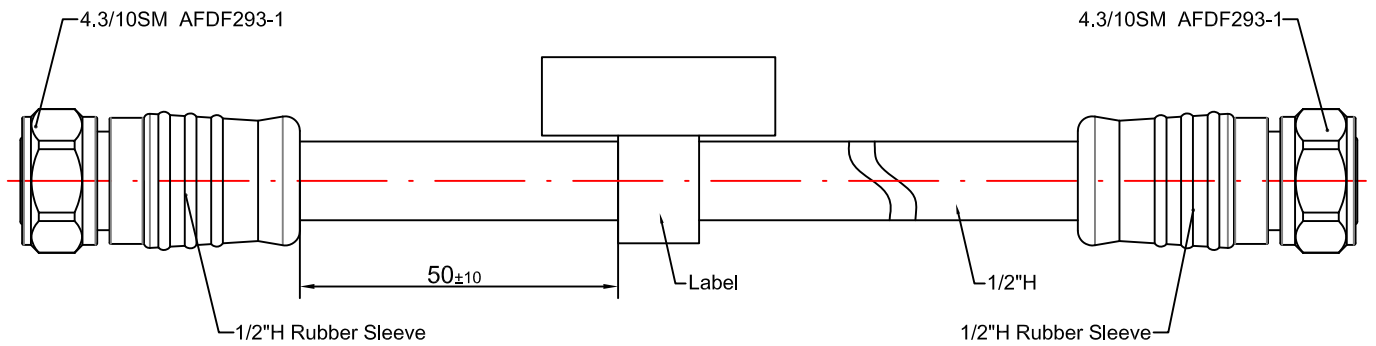

Technical performance:

1. Normal impedance: 50Ω
2. Frequency range: DC~6GHz
3. Return loss: $\leq -28\text{dB}$ (DC-3GHz)
 $\leq -19\text{dB}$ (3-6GHz)
4. PIM (2X43dBm): $\leq -163\text{dBc}$ (700MHz spot-check 10%,
2600MHz full-check)
5. Insertion loss (dB): $\leq$ See the table
(2.7GHz, Both connectors test)
6. Insulation resistance: $\geq 5000\text{M}\Omega$ (DC/500±50V)
7. Proof voltage: 1000V (AC50Hz)

1. Nokia Product Label:
(Font: Arial Narrow Bold, print on both sides)

Specification: Code 128 Auto, details: 1PCS75202.04 (1P) Is fixed content, CS75202.04 Is Nokia Item Code	NOKIA Nokia Solutions and Networks Barcode (1P) CS75202.04 (S) KL0001 Barcode Made in Mexico	1/2" JUMPER CABLE 2D symbol	Jumper cable style Details: 1) > 061PCS75202.04 SKL0001 18VLENSN4LCN 16D20150615 CS75202.04 Is Nokia Item code 0001 Is Serial No. 20150615 Is Manufacturing date YYYYMMDD
---	---	--------------------------------	--

P/N.	L (mm)	IL (dB)	Product description
K576-8.3/0135	3000 ⁺³⁰ ₋₁₀	0.79	4.3/10SM-4.3/10SM 1/2"H Fuyang Cable 0.14 3m (Special for Nokia)

Amphenol Fuyang Mexico

DRAWN		Description	Drawing No.	Ver.	Rev.
CHECKED		4.3/10SM-4.3/10SM 1/2"H			
APPROVED		Sheet 1/1	FMK576-8	3	0
		Metric mm			