



Rev No.	Version note:	Date	Signature	Approved
---------	---------------	------	-----------	----------

Drawing 1

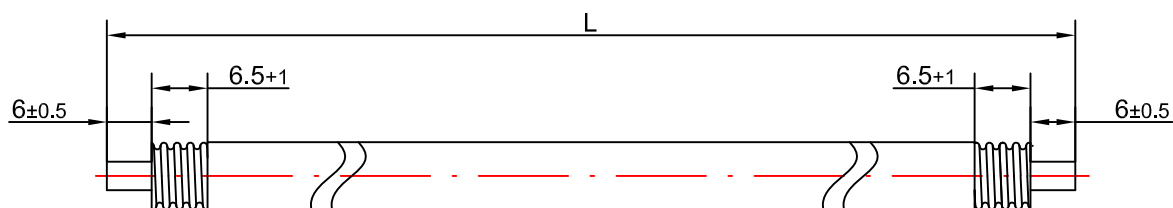

Drawing I

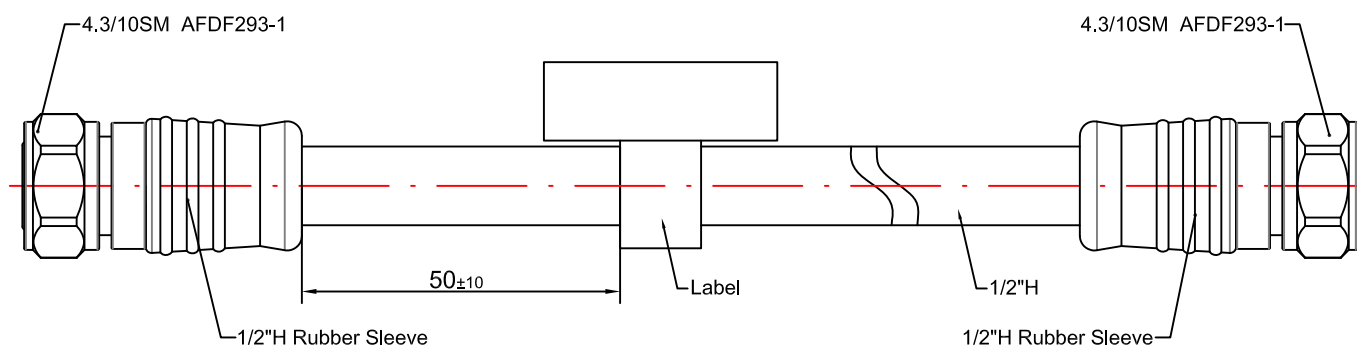

Technical performance:

1. Normal impedance: 50Ω
2. Frequency range: DC~6GHz
3. Return loss:
≤-28dB(DC-3GHz)
≤-19dB(3-6GHz)
4. PIM (2X43dBm): ≤-163dBc(700MHz spot-check 10%,
2600MHz full-check)
5. Insertion loss (dB): ≤See the table
(2.7GHz, Both connectors test)
6. Insulation resistance: ≥5000MΩ(DC/500±50V)
7. Proof voltage: 1000V (AC50Hz)

1、Nokia Product Label:
(Font:Arial Narrow Bold, print on both sides)

Specification: Code 128 Auto. details:1PCS75202.04 (1P) is fixed content.
CS75202.04 is Nokia Item code.

(N)P is fixed content.
CS75202.04 is Nokia Item code.

(S) KL is fixed content. 0001 is Serial No.

Specification: Code 128 Auto. details:
SKL0001(SKL is fixed content, 0001 is Serial No.)

NOKIA Nokia Solutions and Networks
Barcode
(1P) CS75202.04
(S) KL0001
Barcode
Made In Mexico

12P JUMPER CABLE
20 symbol

Jumper cable style

Details: I) >=061PCS75202.04 SKL0001
IIVLENNNAI.CN 16020150615
CS75202.04 is Nokia Item code
0001 is Serial No.
20150615 is Manufacturing date YYYYMMDD

P/N.	L (mm)	IL (dB)	Product description
K576-8.3/0135	3000 ⁺³⁰ ₋₁₀	0.79	4.3/10SM-4.3/10SM 1/2"H Fuyang Cable 0.14 3m (Special for Nokia)

				 Fuyang Mexico		
DRAWN		Description 4.3/10SM-4.3/10SM 1/2"H		Drawing No.	Ver.	Rev.
CHECKED				FMK576-8	3	0
APPROVED		Sheet 1/1	Metric mm			