



|         |               |      |           |          |
|---------|---------------|------|-----------|----------|
| Rev No. | Version note: | Date | Signature | Approved |
|---------|---------------|------|-----------|----------|

Drawing I

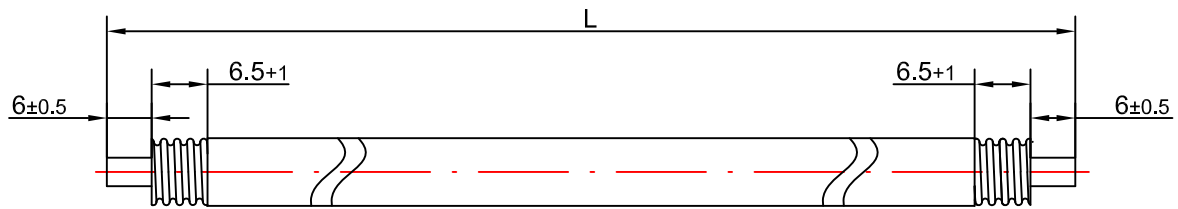


Drawing I

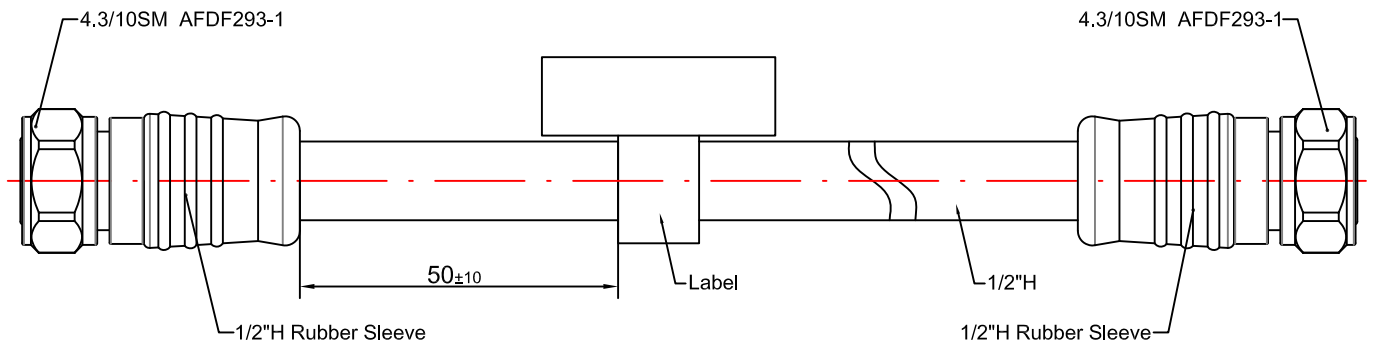

Technical performance:

1. Normal impedance: 50Ω
2. Frequency range: DC~6GHz
3. Return loss: ≤-28dB(DC-3GHz)  
≤-19dB(3-6GHz)
4. PIM (2X43dBm): ≤-163dBc(700MHz spot-check 10%,  
2600MHz full-check)
5. Insertion loss (dB): ≤See the table  
(2.7GHz, Both connectors test)
6. Insulation resistance: ≥5000MΩ(DC/500±50V)
7. Proof voltage: 1000V (AC50Hz)

1. Nokia Product Label:  
(Font:Arial Narrow Bold, print on both sides)

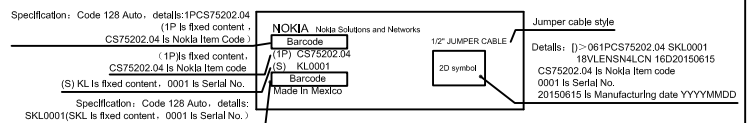

| P/N.          | L<br>(mm)                          | IL<br>(dB) | Product description                                              |
|---------------|------------------------------------|------------|------------------------------------------------------------------|
| K576-8.3/0135 | 3000 <sup>+30</sup> <sub>-10</sub> | 0.79       | 4.3/10SM-4.3/10SM 1/2"H Fuyang Cable 0.14 3m (Special for Nokia) |

**Amphenol** Fuyang Mexico

|          |  |                         |             |      |      |
|----------|--|-------------------------|-------------|------|------|
| DRAWN    |  | Description             | Drawing No. | Ver. | Rev. |
| CHECKED  |  | 4.3/10SM-4.3/10SM 1/2"H |             |      |      |
| APPROVED |  | Sheet 1/1               | FMK576-8    | 3    | 0    |
|          |  | Metric mm               |             |      |      |