


1. WORKMANSHIP MUST CONFORM TO ANSI/IPC-A-610 (CLASS 2), LATEST REVISION.
2. CONFORMAL COATING MUST CONFORM TO IPC-J-STD-001, LATEST REVISION.
3. CONFORMAL COAT MATERIAL:
USE TESLA P/N 01-002192-00, LATEST REVISION. ALL MATERIAL MUST CONFORM TO IPC-CC-830, LATEST REVISION.
4. APPLY TO BOTH SIDES USING PROCESS PER COATING MANUFACTURER'S INSTRUCTIONS.
5. MASK THE FOLLOWING TOP SIDE MOUNTED CONNECTORS ACCORDINGLY: J1, J3, J4, J5.
6. MASK THREE HOLES AS INDICATED.
7. MASK ALONG EDGES OF PCB. 49.40 AND 62.10 DIMENSIONS APPLIES AFTER CONFORMAL COATING.

- [R] 8. ALL MATERIALS AND COATINGS MUST COMPLY WITH EU DIRECTIVE 2000/53/EC (ELV DIRECTIVE).
- [R] 9. THIS COMPONENT HAS BEEN DESIGNED TO COMPLY WITH A REGULATORY REQUIREMENT. CONTACT TESLA TYPE APPROVAL BEFORE UNDERTAKING DESIGN MODIFICATIONS. A COMPONENT WHICH EMBODIES ALL REQUIREMENTS STATED ON THIS DRAWING WILL COMPLY WITH THE REGULATORY REQUIREMENT.

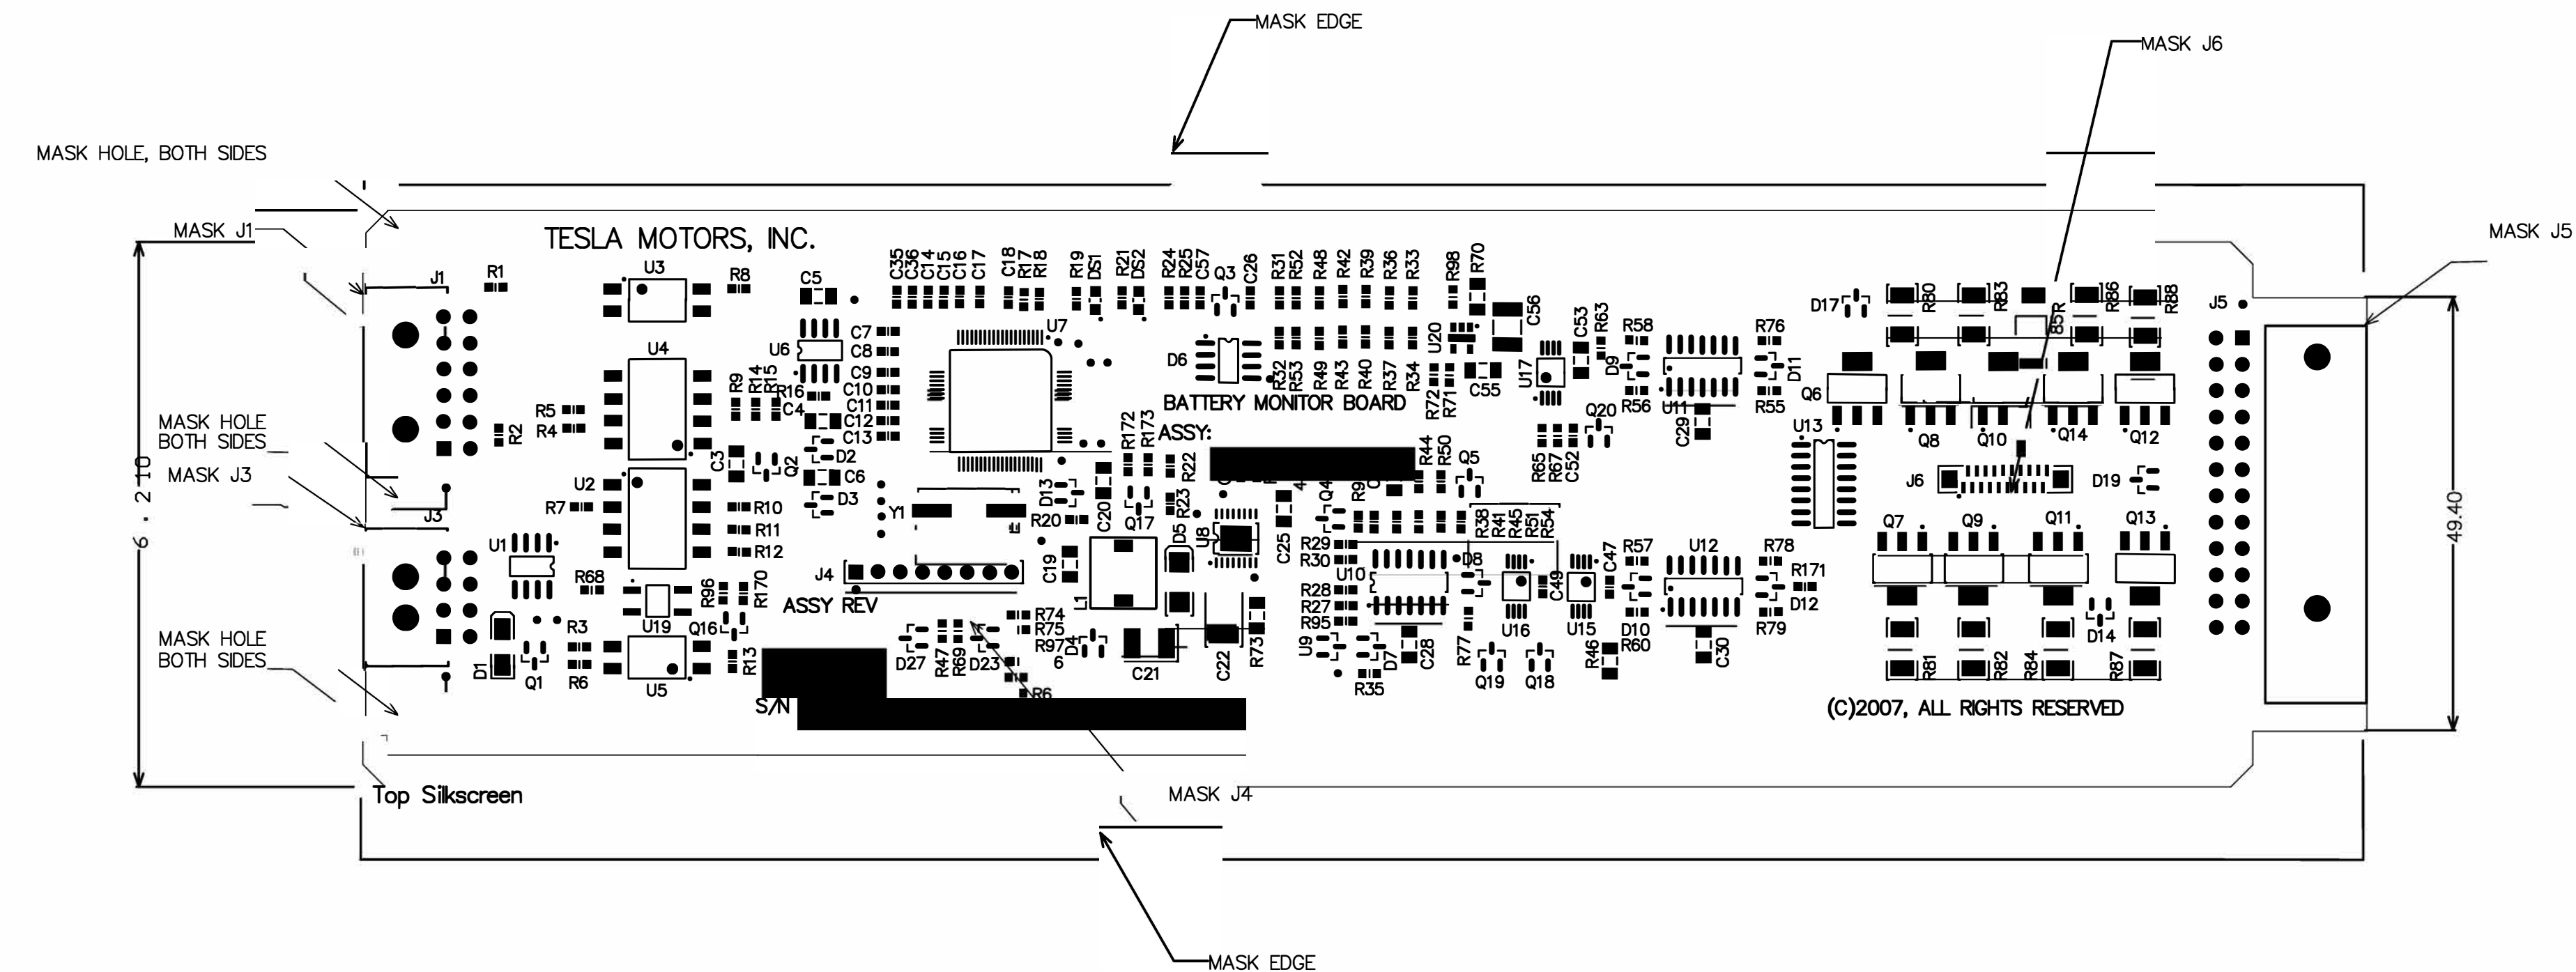

CONFORMAL COAT MASK
BATTERY MONITOR PCBA