V-IDLER & FLAT IDLER PULLEYS



SINGLE ROW BALL BEARINGS


V-BELT IDLER PULLEYS for Agriculture and Industry




Precisely yours...Don Dye pressed steel pulleys are designed to make a complete, economical, self-contained unit for either flat or "V" side of belt. They are furnished with a single-row, radial-type, highest quality precision ground, pre-lubricated ball bearing with contact-type seals to insure positive retention of lubricant and full protection against dirt, dust or foreign matter. No relubrication required. The ball bearing inner ring is extended on both sides to provide clearance for abutting parts and greater support on the shaft. A compression ring is compressed between center O.D. of bearing and center I.D. of pulley bearing pocket to assure a firm reliable fit of pulleys to bearing. This helps distribute loads from the pulley more evenly to the outer bearing race resulting in minimum distortion of bearing O.D. Our tests have proven this method of bearing installation to give longer and more reliable bearing life. With little or no engineering alterations, these belt pulleys can be adapted to new designs or to existing machines.

APPLICATIONS FOR IDLER PULLEY UNITS

- Accurately bore sized for easy, quick mounting on standard 1/2" or 5/8" bolts
- Pulleys are riveted for strength and durability—No spot welding is used
- Feature smoothly rolled-out edges which eliminate belt chafing and scuffing
- "Weep Holes" on the rivet circle allow water drainage when the pulley is mounted in a horizontal position
- V-Groove specially designed to reduce friction and wear on belt






don dye COMPANY INC



GENERAL SPECIFICATIONS OF IDLER PULLEY UNITS

SINGLE ROW BEARINGS

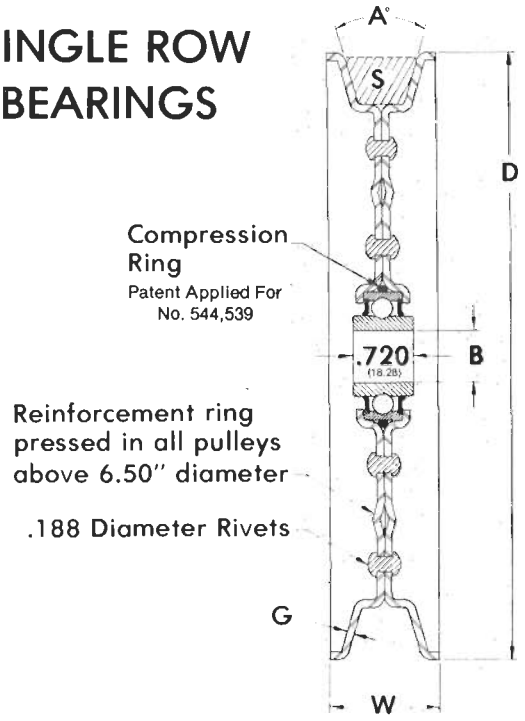

V - IDLERS

Pulley Part No.	A Inc. Angle	B Bore	D Outside Diam.	W Pulley Width	S Belt Size Section	Rows Of Rivets	No. Of Rivets	G Ga. Mat.	Wt.
G2AVI-64	34	.510	4.00	.84	A	1	6	14	.77
		12.95	101.60	21.33	A	1	6	14	.35
G4AVI-64	34	.635	4.00	.84	A	1	6	14	.77
		16.13	101.60	21.33	A	1	6	14	.35
G2BVI-70	32	.510	4.37	1.00	B	1	6	14	.88
		12.95	110.99	25.40	B	1	6	14	.40
G4BVI-70	32	.635	4.37	1.00	B	1	6	14	.88
		16.13	110.99	25.40	B	1	6	14	.40
G2ABVI-80	34	.510	5.00	1.00	AB	1	6	14	1.12
		12.95	127.00	25.40	AB	1	6	14	.51
G4ABVI-80	34	.635	5.00	1.00	AB	1	6	14	1.12
		16.13	127.00	25.40	AB	1	6	14	.51
G2BVI-80	32	.510	5.00	1.00	B	2	18	14	1.12
		12.95	127.00	25.40	B	2	18	14	.51
G4BVI-80	32	.635	5.00	1.00	B	2	18	14	1.12
		16.13	127.00	25.40	B	2	18	14	.51
G2BCVI-81	32	.510	5.06	1.31	BC	1	6	14	1.12
		12.95	128.52	33.27	BC	1	6	14	.51
G4BCVI-81	32	.635	5.06	1.31	BC	1	6	14	1.12
		16.13	128.52	33.27	BC	1	6	14	.51
G2CVI-84	32	.510	5.25	1.31	C	2	18	14	1.23
		12.95	133.35	33.27	C	2	18	14	.56
G4CVI-84	32	.635	5.25	1.31	C	2	18	14	1.23
		16.13	133.35	33.27	C	2	18	14	.56
G2BVI-100	32	.510	6.25	1.00	B	2	18	14	1.62
		12.95	158.75	25.40	B	2	18	14	.73
G4BVI-100	32	.635	6.25	1.00	B	2	18	14	1.62
		16.13	158.75	25.40	B	2	18	14	.73
G2CVI-100	32	.510	6.25	1.31	C	2	18	14	1.68
		12.95	158.75	33.72	C	2	18	14	.76
G4CVI-100	32	.635	6.25	1.31	C	2	18	14	1.68
		16.13	158.75	33.27	C	2	18	14	.76
G2DVI-100	32	.510	6.25	1.62	D	2	18	14	1.73
		12.95	158.75	41.14	D	2	18	14	.78
G4DVI-100	32	.635	6.25	1.62	D	2	18	14	1.73
		16.13	158.75	41.14	D	2	18	14	.78
G2BVI-108	32	.510	6.75	1.00	B	2	18	14	1.82
		12.95	171.45	25.40	B	2	18	14	.83
G4BVI-108	32	.635	6.75	1.00	B	2	18	14	1.82
		16.13	171.45	25.40	B	2	18	14	.83
G2BCVI-117	32	.510	7.31	1.31	BC	2	18	14	2.14
		12.95	185.67	33.27	BC	2	18	14	.97
G4BCVI-117	32	6.35	7.31	1.31	BC	2	18	14	2.14
		16.13	185.67	33.27	BC	2	18	14	.97
G2CVI-117	32	.510	7.31	1.31	C	2	18	14	2.11
		12.95	185.67	33.27	C	2	18	14	.91
G4CVI-117	32	.635	7.31	1.31	C	2	18	14	2.11
		16.13	185.67	33.27	C	2	18	14	.91
G25VI-128	38	.510	8.047	1.06	5V	2	18	14	2.25
		12.95	204.39	26.97	5V	2	18	14	1.02
G45VI-128	38	.635	8.047	1.06	5V	2	18	14	2.25
		16.13	204.39	26.97	5V	2	18	14	1.02
G25VI-137	38	.510	8.56	1.12	5V	2	18	14	2.56
		12.95	217.42	28.44	5V	2	18	14	1.16
G45VI-137	38	.635	8.56	1.12	5V	2	18	14	2.56
		16.13	217.42	28.44	5V	2	18	14	1.16
G2CVI-144	32	.510	9.00	1.31	C	2	18	14	3.05
		12.95	228.60	33.27	C	2	18	14	1.38
G4CVI-144	32	.635	9.00	1.31	C	2	18	14	3.05
		16.13	228.60	33.27	C	2	18	14	1.38
G25VI-152	38	.510	9.50	1.12	5V	2	18	14	3.26
		12.95	241.30	28.44	5V	2	18	14	1.48
G45VI-152	38	.635	9.50	1.12	5V	2	18	14	3.26
		16.13	241.30	28.44	5V	2	18	14	1.48

Inch Dimensions
Metric Dimensions

1984


FLAT IDLER PULLEYS for Agriculture and Industry



Precisely yours...Don Dye pressed steel pulleys are designed to make a complete, economical, self-contained unit for either flat or "V" side of belt. They are furnished with a single-row, radial-type, highest quality precision ground, pre-lubricated ball bearing with contact-type seals to insure positive retention of lubricant and full protection against dirt, dust or foreign matter. No relubrication required. The ball bearing inner ring is extended on both sides to provide clearance for abutting parts and greater support on the shaft. A compression ring is compressed between center O.D. of bearing and center I.D. of pulley bearing pocket to assure a firm reliable fit of pulleys to bearing. This helps distribute loads from the pulley more evenly to the outer bearing race resulting in minimum distortion of bearing O.D. Our tests have proven this method of bearing installation to give longer and more reliable bearing life. With little or no engineering alterations, these belt pulleys can be adapted to new designs or to existing machines.

APPLICATIONS FOR IDLER PULLEY UNITS

- Accurately bore sized for easy, quick mounting on standard 1/2" or 5/8" bolts
- Pulleys are riveted for strength and durability—No spot welding is used
- Feature smoothly rolled-out edges which eliminate belt chafing and scuffing
- "Weep Holes" on the rivet circle allow water drainage when the pulley is mounted in a horizontal position




don dye COMPANY INC



GENERAL SPECIFICATIONS OF IDLER PULLEY UNITS

SINGLE ROW BEARINGS

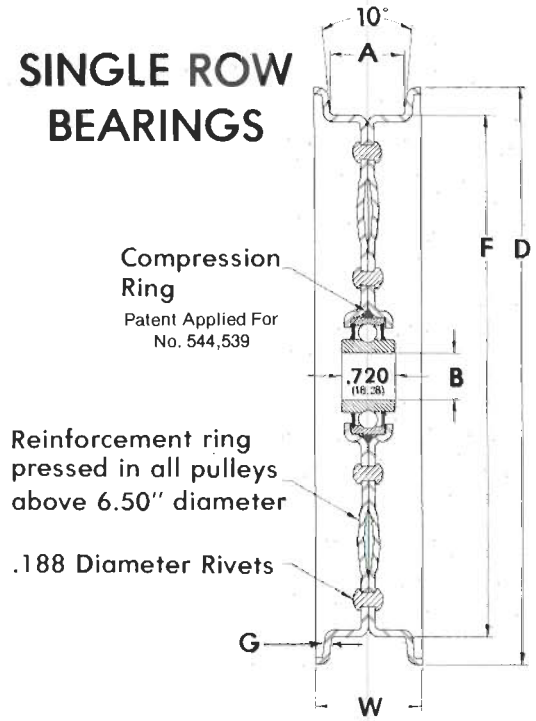

FLAT IDLERS

Pulley Part No.	A Face Width	B Bore	D Outside Diam.	W Pulley Width	F Face Diam.	Rows Of Rivets	No. Of Rivets	G Ga. Mat.	Wt.
G2ABFI-64	.75	.510	4.00	1.12	3.38	1	6	14	.83
	19.05	12.95	101.60	28.44	85.85	1	6	14	.38
G4ABFI-64	.75	.635	4.00	1.12	3.38	1	6	14	.83
	19.05	16.13	101.60	28.44	85.85	1	6	14	.38
G2ABFI-76	.75	.510	4.75	1.12	4.00	2	18	14	1.09
	19.05	12.95	120.65	28.44	101.60	2	18	14	.49
G4ABFI-76	.75	.635	4.75	1.12	4.00	2	18	14	1.09
	19.05	16.13	120.65	28.44	101.60	2	18	14	.49
G2BCFI-76	1.00	.510	4.75	1.43	4.00	2	18	14	1.14
	25.40	12.95	120.65	36.51	101.60	2	18	14	.52
G4BCFI-76	1.00	.635	4.75	1.43	4.00	2	18	14	1.14
	25.40	16.13	120.65	36.51	101.60	2	18	14	.52
G2BCFI-92	1.00	.510	5.75	1.43	5.00	2	18	14	1.55
	25.40	12.95	146.05	36.51	127.00	2	18	14	.70
G4BCFI-92	1.00	.635	5.75	1.43	5.00	2	18	14	1.55
	25.40	16.13	146.05	36.51	127.00	2	18	14	.70
G2FPB2A-92	1.31	.510	5.75	1.75	5.00	2	18	14	1.70
	33.27	12.95	146.05	44.45	127.00	2	18	14	.77
G4FPB2A-92	1.31	.635	5.75	1.75	5.00	2	18	14	1.70
	33.27	16.13	146.05	44.45	127.00	2	18	14	.77
G226FI-92	1.62	.510	5.75	2.06	5.00	2	18	14	1.75
	41.14	12.95	146.05	52.39	127.00	2	18	14	.79
G426FI-92	1.62	.635	5.75	2.06	5.00	2	18	14	1.75
	41.14	16.13	146.05	52.39	127.00	2	18	14	.79
G232FI-92	2.00	.510	5.75	2.43	5.00	2	18	14	1.85
	50.80	12.95	146.05	61.91	127.00	2	18	14	.84
G432FI-92	2.00	.635	5.75	2.43	5.00	2	18	14	1.85
	50.80	16.13	146.05	61.91	127.00	2	18	14	.84
G2ABFI-100	.75	.510	6.25	1.18	5.50	2	18	14	1.68
	19.05	12.95	158.75	30.16	139.70	2	18	14	.76
G4ABFI-100	.75	.635	6.25	1.18	5.50	2	18	14	1.68
	19.05	16.13	158.75	30.16	139.70	2	18	14	.76
G2BCFI-100	1.00	.510	6.25	1.43	5.50	2	18	14	1.75
	25.40	12.95	158.75	36.51	139.70	2	18	14	.79
G4BCFI-100	1.00	.635	6.25	1.43	5.50	2	18	14	1.75
	25.40	16.13	158.75	36.51	139.70	2	18	14	.79

Pulley Part No.	A Face Width	B Bore	D Outside Diam.	W Pulley Width	F Face Diam.	Rows Of Rivets	No. Of Rivets	G Ga. Mat.	Wt.
*G224FFI-104	1.50	.510	6.50	1.50	6.50	2	18	14	2.125
	38.10	12.95	165.1	38.10	165.1	2	18	14	.963
*G424FFI-104	1.50	.635	6.50	1.50	6.50	2	18	14	2.125
	38.10	16.13	165.1	38.10	165.1	2	18	14	.963
G2ABFI-108	.75	.510	6.75	1.18	6.00	2	18	14	1.91
	19.05	12.95	171.45	30.16	152.40	2	18	14	.87
G4ABFI-108	.75	.635	6.75	1.18	6.00	2	18	14	1.91
	19.05	16.13	171.45	30.16	152.40	2	18	14	.87
G2BCFI-108	1.00	.510	6.75	1.43	6.00	2	18	14	1.97
	25.40	12.95	171.45	36.51	152.40	2	18	14	.89
G4BCFI-108	1.00	.635	6.75	1.43	6.00	2	18	14	1.97
	25.40	16.13	171.45	36.51	152.40	2	18	14	.89
G226FI-108	1.62	.510	6.75	2.06	6.00	2	18	14	2.19
	41.28	12.95	171.45	52.39	152.40	2	18	14	.99
G426FI-108	1.62	.635	6.75	2.06	6.00	2	18	14	2.19
	41.28	16.13	171.45	52.39	152.40	2	18	14	.99
G2BCFI-124	1.00	.510	7.75	1.43	7.00	2	18	14	2.46
	25.40	12.95	196.85	36.51	177.80	2	18	14	1.12
G4BCFI-124	1.00	.635	7.75	1.43	7.00	2	18	14	2.46
	25.40	16.13	196.85	36.51	177.80	2	18	14	1.12
G2BCFI-140	1.00	.510	8.75	1.43	8.00	2	18	14	3.01
	25.40	12.95	222.25	36.51	203.20	2	18	14	1.37
G4BCFI-140	1.00	.635	8.75	1.43	8.00	2	18	14	3.01
	25.40	16.13	222.25	36.51	203.20	2	18	14	1.37
G2DFI-144	1.50	.510	9.00	1.93	8.00	2	18	14	3.36
	38.10	12.95	228.60	49.21	203.20	2	18	14	1.52
G4DFI-144	1.50	.635	9.00	1.93	8.00	2	18	14	3.36
	38.10	16.13	228.60	49.21	203.20	2	18	14	1.52
G232FI-144	2.00	.510	9.00	2.43	8.00	2	18	14	3.56
	50.80	12.95	228.60	61.91	203.20	2	18	14	1.61
G432FI-144	2.00	.635	9.00	2.43	8.00	2	18	14	3.56
	50.80	16.13	228.60	61.91	203.20	2	18	14	1.61
G2DFI-176	1.50	.510	11.00	1.93	10.00	2	18	14	4.71
	38.10	12.95	279.40	49.31	254	2	18	14	4.71
G4DFI-176	1.50	.635	11.00	1.93	10.00	2	18	14	2.14
	38.10	16.13	279.40	49.21	254	2	18	14	2.14

*Flat Face, No Flange

1984

Inch Dimensions
Metric Dimensions



P.O. Box 107/Kingman, Kansas 67068
Phone 316-532-3131

V-IDLER & FLAT IDLER PULLEYS

don dye COMPANY INC.®


FORMED POCKET DESIGN
(Non Replaceable Bearing)

WELDED HUB DESIGN
(Replaceable Bearing)

DOUBLE ROW BALL BEARINGS

DOUBLE ROW BALL BEARING IDLER PULLEYS

FORMED POCKET DESIGN

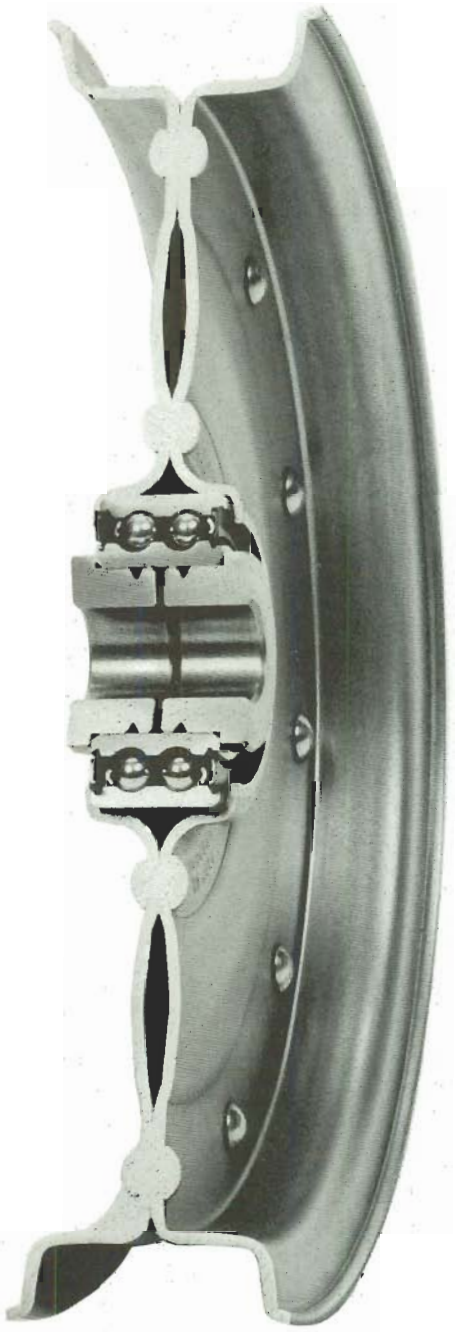

Precisely yours . . . This Don Dye line of heavy duty double row ball bearing flat, flanged, and V groove idlers of formed pocket design was developed to handle heavier loads that exceed the capacity of single row ball bearing idlers. The double row idlers listed on pages 6 and 7 are more stable when side loads or off center loads occur. They are available with ½", ⅝" or even ¾" bolt mounting. These riveted idlers are constructed from 13 gauge material. The high quality precision bearings are prelubricated, have contact type seals for retention of high temperature lubricant to ensure protection against dust, dirt or foreign matter. No relubrication is required. A compression ring is compressed between center of O.D. of bearing and center I.D. of pulley bearing pocket to assure a firm reliable fit of pulleys to bearing. This helps distribute loads from the pulley more evenly to the outer bearing race resulting in minimum distortion of bearing O.D. Our tests have proved this method of bearing installation to give longer and more reliable bearing life.




don dye COMPANY INC.®

1985


GENERAL SPECIFICATIONS OF IDLER PULLEY UNITS

DOUBLE ROW BALL BEARINGS

FORMED POCKET DESIGN

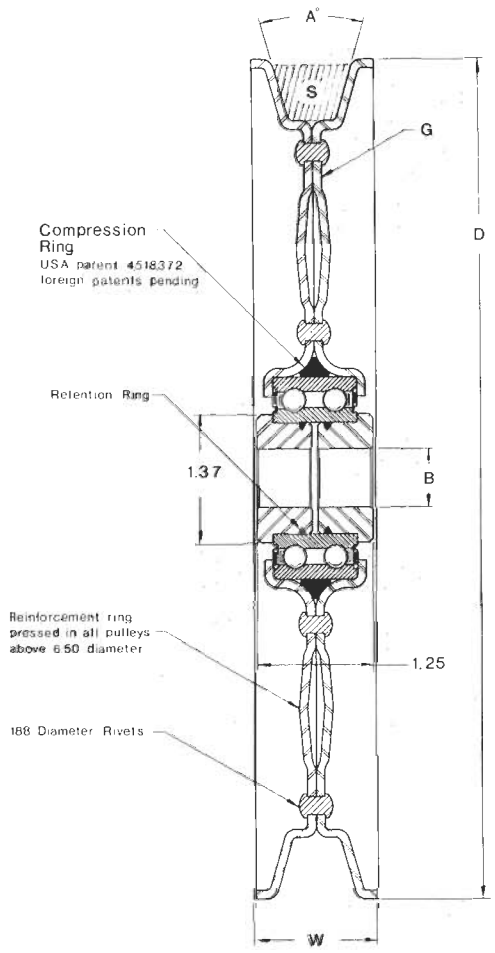

FORMED POCKET DESIGN

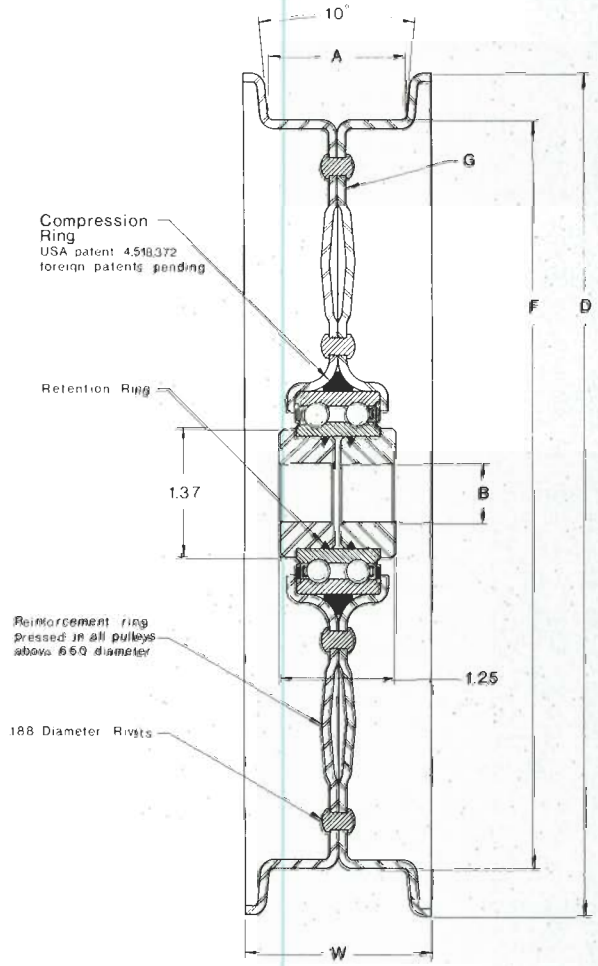

V - IDLERS

Pulley Part No.	A Inc. Angle	B Bore	D Outside Diam.	W Pulley Width	S Belt Size Section	Rows Of Rivets	No. Of Rivets	G Ga. Mat.	App. Wt.
2CVI-84	32°	Bolt Diameter ½" - ⅝" - ¾"	5.25	1.37	C	1	9	13	1.88
			133.35	34.80	C	1	9	13	.85
2CVI-117	32°		7.31	1.37	C	2	18	13	3.00
			185.67	34.80	C	2	18	13	1.36
2CVI-144	32°		9.00	1.37	C	2	18	13	4.20
			228.60	34.80	C	2	18	13	1.91

FLAT FLANGED - IDLERS

Pulley Part. No.	F Face Width	B Bore	D Outside Diam.	W Pulley Width	F Face Diam.	Rows Of Rivets	No. Of Rivets	G Ga. Mat.	App. Wt.
208032092	2.00	Bolt Diameter ½" - ⅝" - ¾"	5.75	2.48	5.00	2	18	13	2.62
	50.80		146.05	63.10	127.00	2	18	13	1.19
209626108	1.62		6.75	2.06	6.00	2	18	13	3.04
	41.14		171.45	52.40	152.40	2	18	13	1.40
209632108	2.00		6.75	2.48	6.00	2	18	13	3.27
	50.80		171.45	63.10	152.40	2	18	13	1.48
212824144	1.50		9.00	2.03	8.00	2	18	13	4.55
	38.10		228.60	51.56	230.20	2	18	13	2.07
*212826144	1.62		9.00		8.00	2	18	13	3.81
	41.14		228.60		203.20	2	18	13	1.73
212832144	2.00		9.00	2.57	8.00	2	18	13	4.89
	50.80		228.60	65.27	203.20	2	18	13	2.22
212842160	2.62		10.00	3.31	8.00	2	18	13	6.58
	66.65		254.00	84.07	203.20	2	18	13	2.99
212852160	3.25		10.00	3.87	8.00	2	18	13	6.81
	82.55		254.00	98.30	203.02	2	18	13	3.09


*Flange on one side only



GENERAL SPECIFICATIONS OF IDLE PULLEY UNITS

DOUBLE ROW BALL BEARINGS

FORMED POCKET DESIGN

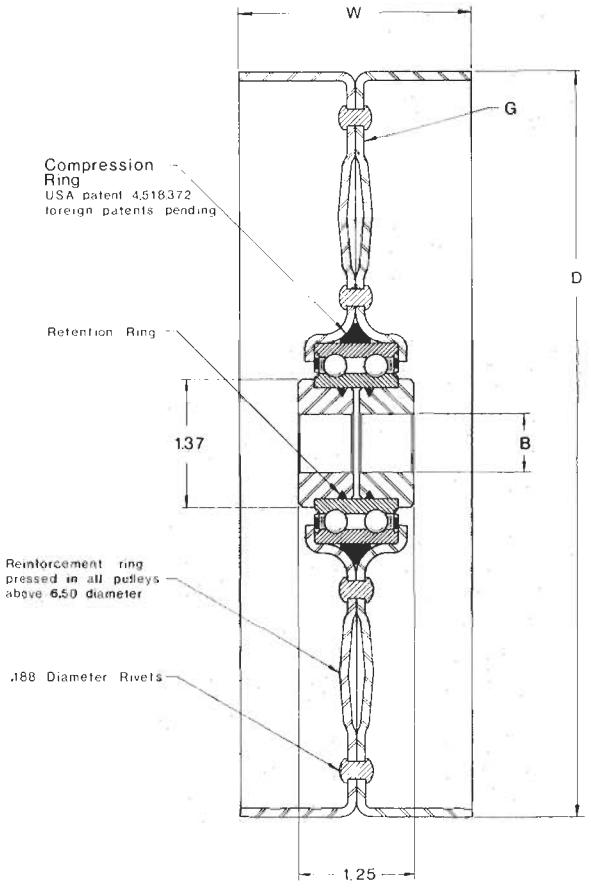

FLAT FACE IDLERS


Pulley Part No.	F Face Width	B Bore	D Outside Dia.	W Pulley Width	F Face Diam.	Rows Of Rivets	No. Of Rivets	G Ga. Mat.	App. Wt.
208032080	2.00		5.00	2.00	5.00	2	18	13	2.32
	50.80		127.00	50.80	127.00	2	18	13	1.05
208036080	2.25		5.00	2.25	5.00	2	18	13	2.41
	57.15		127.00	57.15	127.00	2	18	13	1.10
208040080	2.50		5.00	2.50	5.00	2	18	13	2.51
	63.50		127.00	63.50	127.00	2	18	13	1.14
208048080	3.00		5.00	3.00	5.00	2	18	13	2.66
	76.20		127.00	76.20	127.00	2	18	13	1.21
208052080	3.25		5.00	3.25	5.00	2	18	13	2.77
	82.55		127.00	82.55	127.00	2	18	13	1.26
210432104	2.00	Bolt Diameter ½" - ⅝" - ¾"	6.50	2.00	6.50	2	18	13	3.19
	50.80		165.10	50.80	165.10	2	18	13	1.45
210436104	2.25		6.50	2.25	6.50	2	18	13	3.32
	57.15		165.10	57.15	165.10	2	18	13	1.51
210440104	2.50		6.50	2.50	6.50	2	18	13	3.42
	63.50		165.10	63.50	165.10	2	18	13	1.55
210448104	3.00		6.50	3.00	6.50	2	18	13	3.68
	76.20		165.10	76.20	165.10	2	18	13	1.67
210452104	3.25		6.50	3.25	6.50	2	18	13	3.82
	82.55		165.10	82.55	165.10	2	18	13	1.74
210456104	3.50		6.50	3.50	6.50	2	18	13	3.93
	88.90		165.10	88.90	165.10	2	18	13	1.78
212832128	2.00		8.00	2.00	8.00	2	18	13	4.28
	50.80		203.20	50.80	203.20	2	18	13	1.94
212836128	2.25		8.00	2.25	8.00	2	18	13	4.41
	57.15		203.20	57.15	203.20	2	18	13	2.00
212840128	2.50		8.00	2.50	8.00	2	18	13	4.55
	63.50		203.20	63.50	203.20	2	18	13	2.07
212848128	3.00		8.00	3.00	8.00	2	18	13	4.89
	76.20		203.20	76.20	203.20	2	18	13	2.22
212852128	3.25		8.00	3.25	8.00	2	18	13	5.03
	82.55		203.20	82.55	203.20	2	18	13	2.28
212856128	3.50		8.00	3.50	8.00	2	18	13	5.21
	88.90		203.20	88.90	203.20	2	18	13	2.37

don dye COMPANY INC.®

1985

DOUBLE ROW BALL BEARING IDLER PULLEYS

WELDED HUB DESIGN

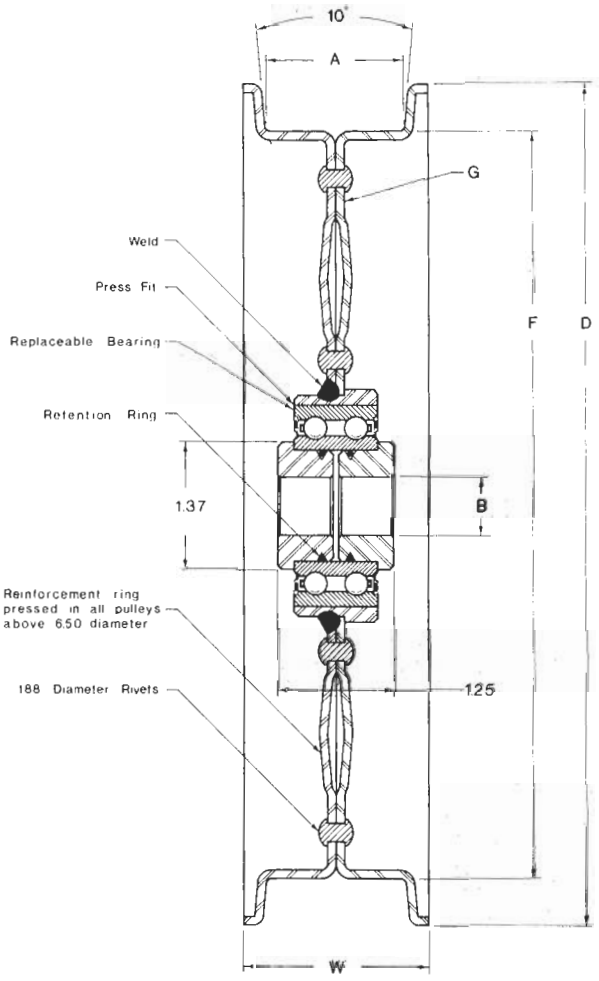

Precisely yours... For ten to twenty percent additional cost over the formed pocket design, **this welded hub design** can be supplied where severe load or speed conditions are encountered and longer more consistent bearing life is desired. A machined hub is mig welded into the idler pulley. The hub bore tolerance is then sized to plus or minus three ten thousandths of an inch. This procedure is designed for maximum bearing life. After many tests and actual use, this welded hub method proved bearing life is more consistent over the formed pocket design. The bearing can be pressed out and a new bearing pressed in when necessary. Considering the advantage of a **replaceable bearing** and consistently **longer bearing life,** this design pulley is an excellent choice. The high quality precision ground bearings are prelubricated, using contact type seals for retention of high temperature lubricant and to ensure protection against dust, dirt and foreign matter. No relubrication is required. (Same bearing as used with formed pocket design.) These riveted idler pulleys are constructed from thirteen gauge material. (Same as formed pocket design.) They are available with ½", ⅝" and ¾" bolt mounting. Where volume justifies, these pulleys can be tooled and fabricated from eleven gauge material when extreme wear conditions are encountered.

TO ORDER Welded hub design.
All pulleys listed on pages six and seven can be supplied with the welded hub design. Pulley dimensions are the same except part numbers will begin with the letter **R.**

Example

Formed Pocket	Welded Hub
212824144	R212824144


don dye COMPANY INC.®
1985



P.O. Box 107/Kingman, Kansas 67068
Phone 316-532-3131

V-BELT DRIVE PULLEYS

don dye COMPANY INC.®

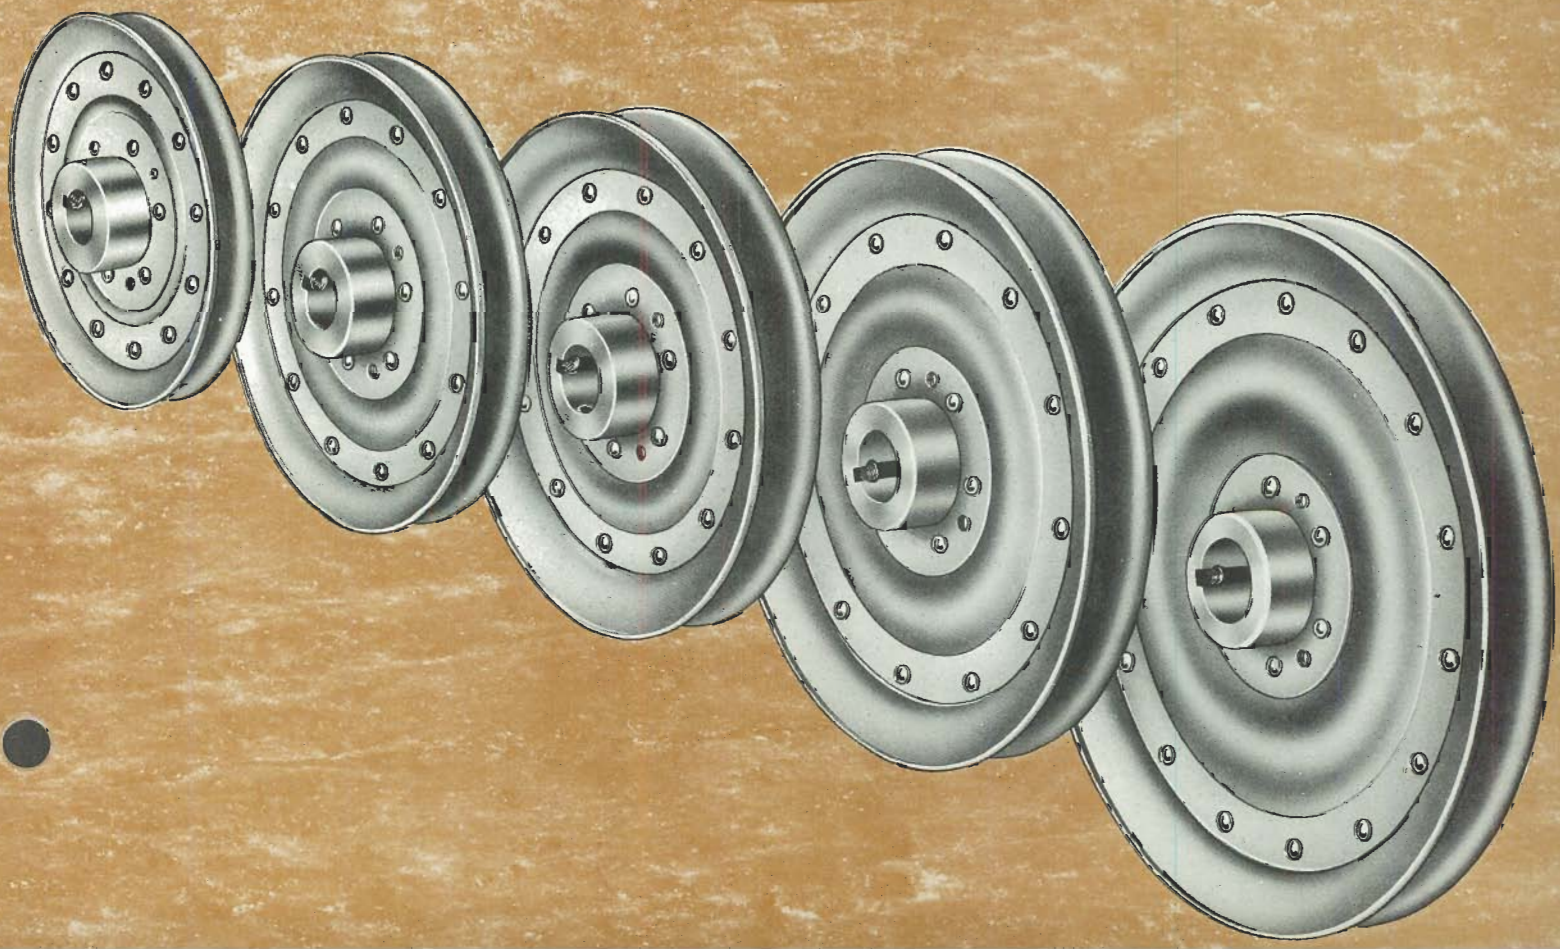


V-BELT DRIVE PULLEYS

These Don Dye drive pulleys are designed for consistent quality. We do not stake, copper braze or spot weld. The pulleys are formed on compound dies designed and built in our plant and held to much closer tolerances than would normally be considered necessary. The halves are then riveted together and the hubs welded in by mig welders on turning and holding fixtures designed and built in our plant for this express purpose. They require no balancing and are easily adapted to standard or special uses. In many instances these pulleys have proved strong enough to replace cast pulleys resulting in considerable cost savings to the manufacturer and consumer.

We believe you will find this to be the strongest and most dependable line of riveted pressed steel drive pulleys on the market today.



STANDARDS When ordering standards please remember the sheave itself is 14 guage and has the same part number regardless of hub design. Our standard hubs with part numbers listed below have keyway and two set screw holes tapped with N.C. threads. Please order pulley number with hub number. For "A", "B", and "C" Section Belt, with groove dimensions to ASAE Standards, except E.O.D. For prices refer to our standard price sheet.

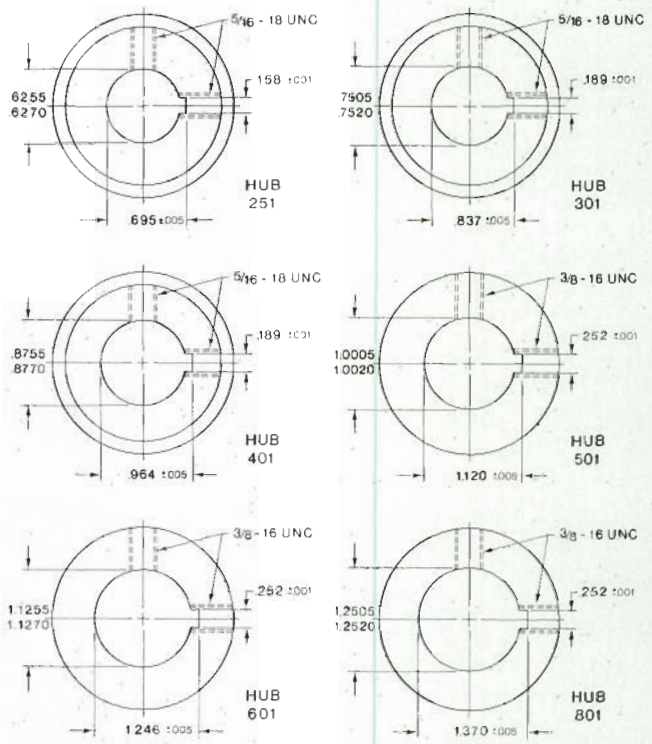


(Other hubs available on pages 16 thru 24)

SPECIALS Specials are produced in 14 gauge, 13 gauge and 11 gauge with many combinations of hub lengths and bores to 1½" diameter. Hubs are machined from 2", 2 1/8" and 2 1/2" diameter steel bar stock. Bores can be tapered with keyways, tapered keyways, broached splines, hex bores, metric bores or dimensions, pin holes or any number of special shapes and combinations. The pulleys can be trimmed and mounted on one hub for two, three or more grooves for power band or matched belts. Pulleys of different diameters can be mounted on the same hub for step cone effect or speed change, also with double row ball bearing hubs, page 15.

Most of these pulleys are available with 6½" diameter flat area in the center for punching a bolt hole arrangement to bolt to customers hub. See pages 25 thru 34 for sizes now available. We are continually tooling additional sizes, therefore, newer pulleys or bolt arrangements may not be listed. Please send prints or sketches of your requirements.

P.O. Box 107/Kingman, Kansas 67068
Phone 316-532-3131

GENERAL SPECIFICATIONS OF "A" GROOVE DRIVE PULLEYS

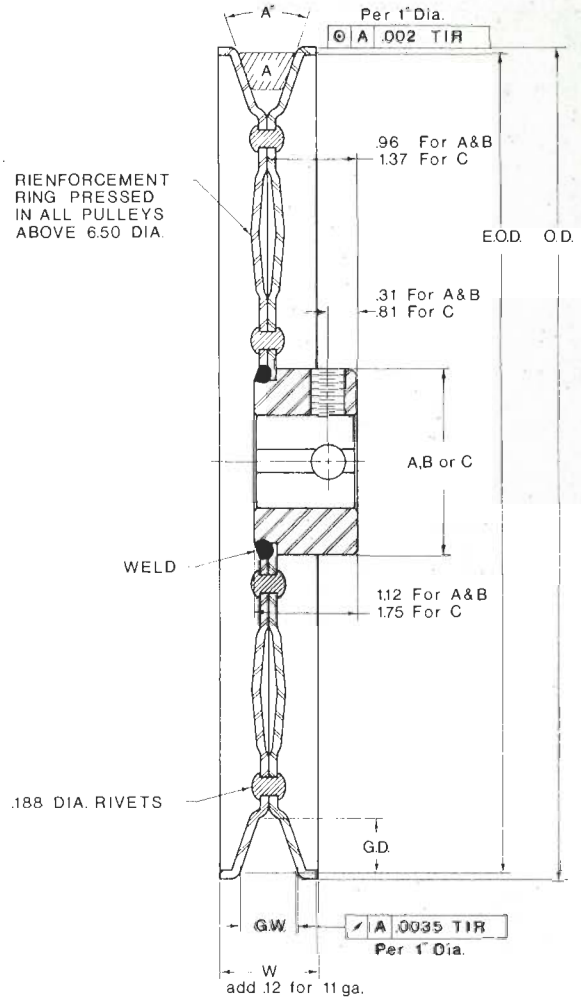


A-1.75" O.D. FOR BORES .751 TO .876
B-2.00" O.D. FOR BORES 1.001 TO 1.251
C-2.50" O.D. FOR BORES 1.376 TO 1.501

Pulley Part No.	O.D.	E.O.D.	Pulley Width	Groove Depth	Groove Width	Incl. Angle	No. Of Rivets	Approx. Wt./Ga. 14	13	11
DA-60	3.78	3.62	.79	.490	.504	34°	0	.45		
	96.02	91.95	20.07	12.45	12.81	34°	0	.20		
DA-64	4.00	3.88	.87	.490	.504	34°	0	.45	.53	
	101.60	98.56	22.10	12.45	12.81	34°	0	.20	.24	
DA-72	4.50	4.37	.87	.645	.580	34°	6	.62		
	114.30	111.00	22.10	16.40	14.73	34°	6	.28		
DA-80	5.00	4.87	.87	.490	.504	34°	18	.80		
	127.00	123.70	22.10	12.45	12.81	34°	18	.36		
DA-96	6.00	5.87	.87	.490	.504	38°	18	1.20		
	152.40	149.10	22.10	12.45	12.81	38°	18	.55		
DA-104	6.50	6.37	.87	.490	.504	38°	18	1.43		
	165.10	161.80	22.10	12.45	12.81	38°	18	.65		
DA-112	7.00	6.87	.87	.490	.504	38°	18	1.64		
	177.80	174.50	22.10	12.45	12.81	38°	18	.74		
DA-128	8.00	7.87	.87	.490	.504	38°	18	2.13		
	203.20	199.90	22.10	12.45	12.81	38°	18	.97		
DA-144	9.00	8.87	.87	.490	.504	38°	18	2.71		
	228.60	225.30	22.10	12.45	12.81	38°	18	1.23		
DA-160	10.00	9.87	.87	.490	.504	38°	21	3.33		
	254.00	250.70	22.10	12.45	12.81	38°	21	1.51		
DA-176	11.00	10.87	.87	.490	.504	38°	24	4.04		
	279.40	276.10	22.10	12.45	12.81	38°	24	1.83		
DA-192	12.00	11.87	.87	.490	.504	38°	24	4.79		
	304.80	301.50	22.10	12.45	12.81	38°	24	2.17		
DA-208	13.00	12.87	.87	.490	.504	38°	24	5.60		
	330.20	326.90	22.10	12.45	12.81	38°	24	2.54		
DA-224	14.00	13.87	.87	.490	.504	38°	30	6.51	7.66	
	355.60	352.30	22.10	12.45	12.81	38°	30	2.96	3.48	
DA-240	15.00	14.87	.87	.490	.504	38°	30	7.46		
	381.00	377.70	22.10	12.45	12.81	38°	30	3.39		

Inch Dimensions
Metric Dimensions


If weight is listed pulley is in production.

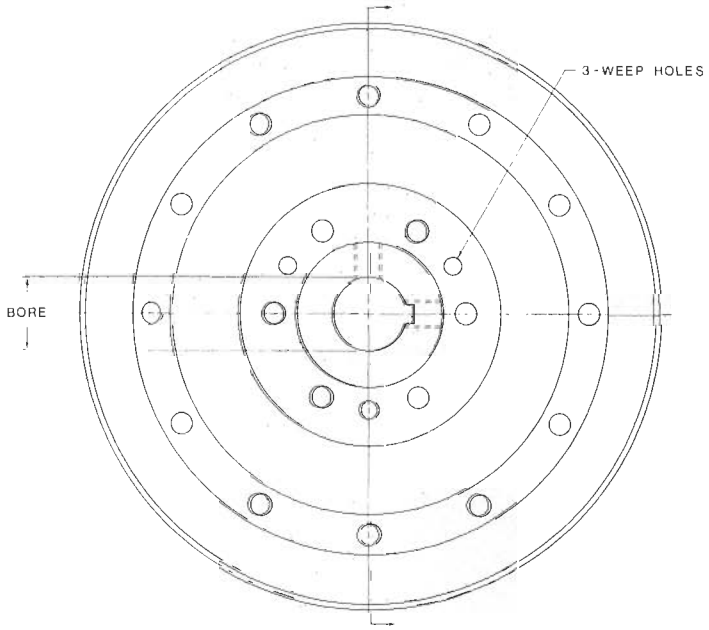

don dye COMPANY INC.®

1985

GENERAL SPECIFICATIONS OF "B" GROOVE DRIVE PULLEYS

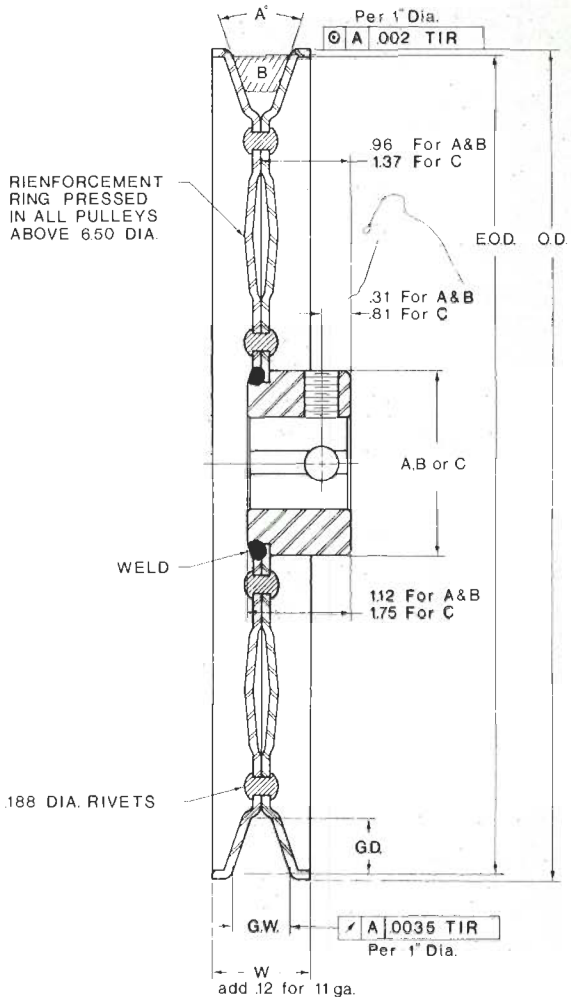


Pulley Part No.	O.D.	E.O.D.	Pulley Width	Groove Depth	Groove Width	Incl. Angle	No. Of Rivets	Approx. Wt./Ga. 14	13	11
DB-64	4.00	3.88	1.06	.580	.637	34°	0	.45	.53	
	101.60	98.56	27.00	14.73	16.18	34°	0	.20	.24	
DB-74	4.62	4.50	1.06	.580	.637	34°	6	.68	.79	
	117.35	114.30	27.00	14.73	16.18	34°	6	.31	.36	
DB-80	5.00	4.87	1.06	.580	.637	34°	9	.80	.94	
	127.00	123.70	27.00	14.73	16.18	34°	9	.36	.42	
DB-88	5.50	5.37	1.06	.580	.637	34°	18	1.02	1.19	
	139.70	136.40	27.00	14.73	16.18	34°	18	.46	.54	
DB-96	6.00	5.87	1.06	.580	.637	34°	18	1.23	1.44	
	152.40	149.10	27.00	14.73	16.18	34°	18	.56	.65	
DDB-100	6.25	5.90	1.06	.760	.748	34°	18	1.34	1.57	
	158.75	149.90	27.00	19.30	19.00	34°	18	.61	.71	
DB-104	6.50	6.37	1.06	.580	.637	34°	18	1.45	1.69	
	165.10	161.80	27.00	14.73	16.18	34°	18	.66	.77	
DB-112	7.00	6.87	1.06	.580	.637	34°	18	1.69	1.98	
	177.80	174.50	27.00	14.73	16.18	34°	18	.77	.90	
DB-128	8.00	7.87	1.06	.580	.650	38°	18	2.14	2.51	
	203.20	199.90	27.00	14.73	16.51	38°	18	.97	1.14	
DB-144	9.00	8.87	1.06	.580	.650	38°	18	2.72	3.20	
	228.60	225.30	27.00	14.73	16.51	38°	18	1.24	1.45	
DB-160	10.00	9.87	1.06	.580	.650	38°	21	3.37	3.96	
	254.00	250.70	27.00	14.73	16.51	38°	21	1.53	1.80	
DB-176	11.00	10.87	1.06	.580	.650	38°	24	4.08	4.80	
	279.40	276.10	27.00	14.73	16.51	38°	24	1.85	2.18	
DB-192	12.00	11.87	1.06	.580	.650	38°	24	4.83	5.68	
	304.80	301.50	27.00	14.73	16.51	38°	24	2.19	2.58	
DB-208	13.00	12.87	1.06	.580	.650	38°	24	5.67	6.67	
	330.20	326.90	27.00	14.73	16.51	38°	24	2.57	3.03	
DB-224	14.00	13.87	1.06	.580	.650	38°	30	6.58	7.75	
	355.60	352.30	27.00	14.73	16.51	38°	30	2.99	3.52	
DB-240	15.00	14.87	1.06	.580	.650	38°	30	7.53	8.86	
	381.00	377.70	27.00	14.73	16.51	38°	30	3.42	4.02	
DB-256	16.00	15.87	1.06	.580	.650	38°	30	8.54	10.05	
	406.40	403.10	27.00	14.73	16.51	38°	30	3.87	4.56	
DB-272	17.00	16.87	1.06	.580	.650	38°	30	9.62	11.33	
	431.80	428.50	27.00	14.73	16.51	38°	30	4.37	5.15	

Inch Dimensions
Metric Dimensions


If weight is listed pulley is in production.

A-1.75" O.D. FOR BORES .751 TO .876
B-2.00" O.D. FOR BORES 1.001 TO 1.251
C-2.50" O.D. FOR BORES 1.001 TO 1.501

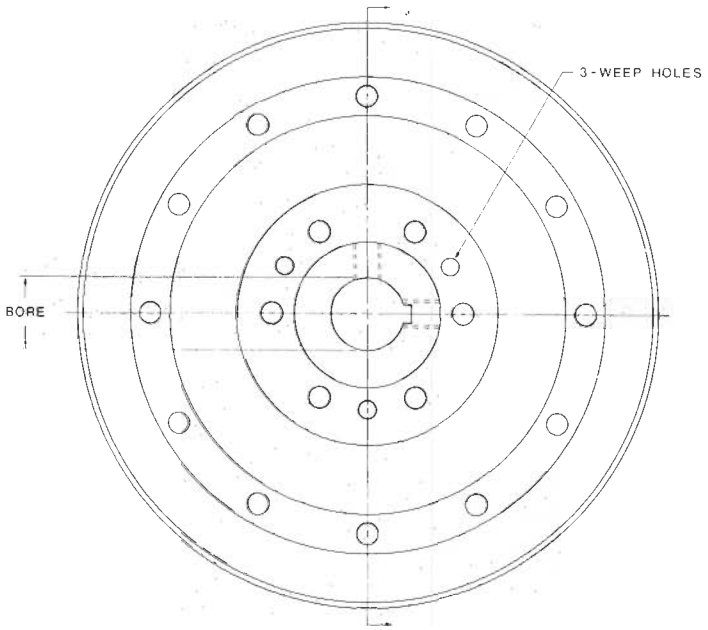

donlye COMPANY INC.®
1985

GENERAL SPECIFICATIONS OF "C" GROOVE DRIVE PULLEYS

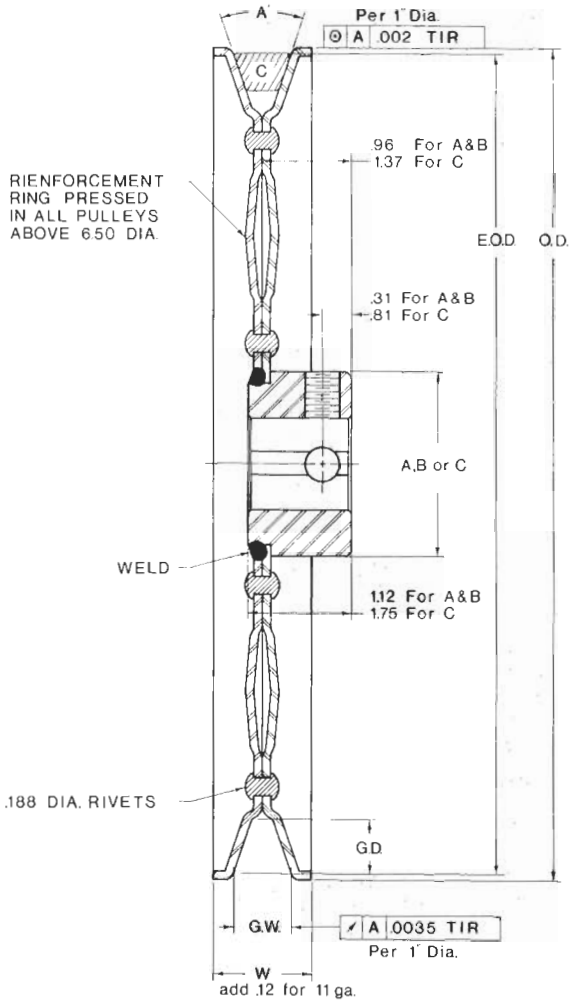


A-1.75" O.D. FOR BORES .7505 TO .877
B-2.00" O.D. FOR BORES 1.0005 TO 1.252
C-2.50" O.D. FOR BORES 1.313 TO 1.502

Pulley Part No.	O.D.	E.O.D.	Pulley Width	Groove Depth	Groove Width	Incl. Angle	No. Of Rivets	Approx. Wt./Ga. 14	13	11
DC-88	5.50	5.37	1.25	.780	.879	34°	9	.74	.86	
	139.70	136.40	31.75	19.81	22.33	34°	9	.34	.39	
DC-104	6.50	6.37	1.25	.780	.879	34°	18	1.46	1.71	
	165.10	161.80	31.75	19.81	22.33	34°	18	.66	.78	
DC-120	7.50	7.37	1.25	.780	.879	34°	18	1.93	2.26	
	190.50	187.20	31.75	19.81	22.33	34°	18	.88	1.03	
DC-136	8.50	8.37	1.25	.780	.887	36°	18	2.46	2.89	
	215.90	212.60	31.75	19.81	22.53	36°	18	1.12	1.31	
*DC-136	8.50	8.37	1.38	.780	.887	36°	18			3.88
	215.90	212.60	35.06	19.81	22.53	36°	18			1.76
DC-152	9.50	9.37	1.25	.780	.887	36°	18	3.05	3.59	
	241.30	238.00	31.75	19.81	22.53	36°	18	1.39	1.63	
*DC-152	9.50	9.37	1.38	.780	.887	36°	18			4.82
	241.30	238.00	35.06	19.81	22.53	36°	18			2.19
DC-168	10.50	10.37	1.25	.780	.887	36°	21	3.71	4.37	
	266.70	263.40	31.75	19.81	22.53	36°	21	1.69	1.98	
*DC-168	10.50	10.37	1.38	.780	.887	36°	21			5.87
	266.70	263.40	35.06	19.81	22.53	36°	21			2.66
DC-176	11.00	10.87	1.25	.780	.887	36°	24	4.11	4.83	
	279.40	276.10	31.75	19.81	22.53	36°	24	1.87	2.19	
DC-184	11.50	11.37	1.25	.780	.887	36°	24	4.48	5.27	
	292.10	288.80	31.75	19.81	22.53	36°	24	2.03	2.39	
*DC-184	11.50	11.37	1.38	.780	.887	36°	24			7.08
	292.10	288.80	35.06	19.81	22.53	36°	24			3.22
DC-192	12.00	11.87	1.25	.780	.895	38°	24	4.85	5.71	
	304.80	301.50	31.75	19.81	22.73	38°	24	2.20	2.59	
DC-200	12.50	12.37	1.25	.780	.895	38°	24	5.23	6.16	
	317.50	314.20	31.75	19.81	22.73	38°	24	2.38	2.80	
*DC-200	12.50	12.37	1.38	.780	.895	38°	24			8.29
	317.50	314.20	35.06	19.81	22.73	38°	24			3.76

Inch Dimensions
Metric Dimensions

*11 Gauge Material Dimensions


If weight is listed pulley is in production.
Continued on next page.

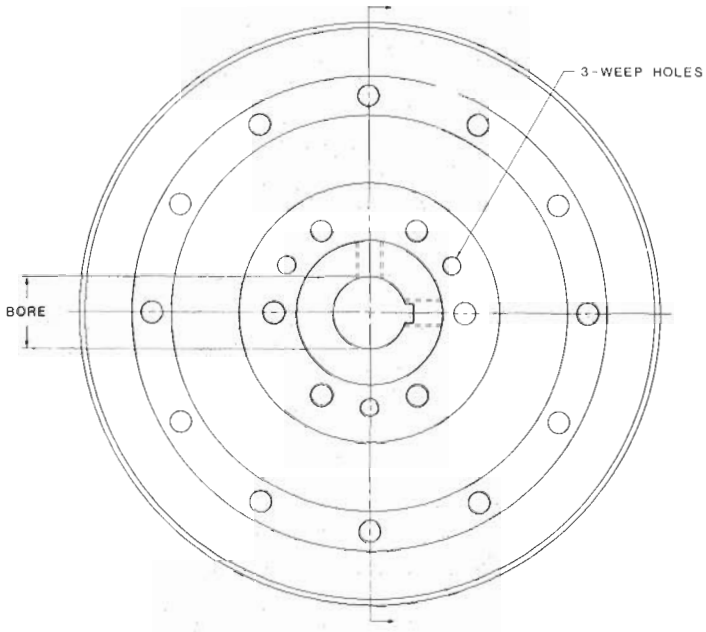

don dye COMPANY INC.®

1985

GENERAL SPECIFICATIONS OF "C" GROOVE DRIVE PULLEYS

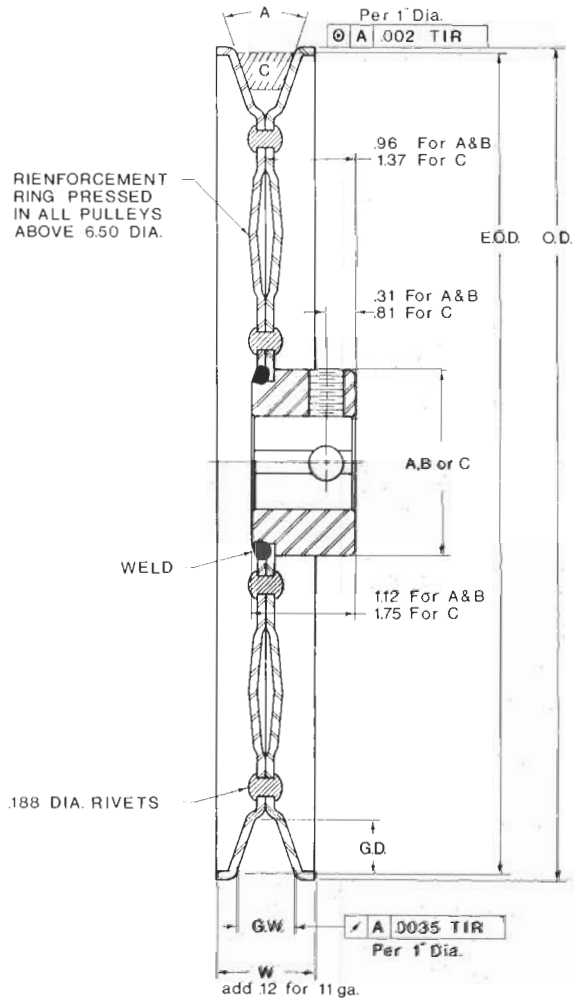


Pulley Part No.	O.D.	E.O.D.	Pulley Width	Groove Depth	Groove Width	Incl. Angle	No. Of Rivets	Approx. Wt./Ga. 14	13	11
DC-208	13.00	12.87	1.25	.780	.895	38°	24	5.23	6.67	
	330.20	326.90	31.75	19.81	22.73	38°	24	2.38	3.03	
DC-216	13.50	13.37	1.25	.780	.895	38°	24	6.08	7.16	
	342.90	339.60	31.75	19.81	22.73	38°	24	2.76	3.25	
*DC-216	13.50	13.37	1.38	.780	.895	38°	24			9.65
	342.90	339.60	35.06	19.81	22.73	38°	24			4.38
DC-232	14.50	14.37	1.25	.780	.895	38°	30	7.07	8.32	
	368.30	365.00	31.75	19.81	22.73	38°	30	3.21	3.78	
DC-248	15.50	15.37	1.25	.780	.895	38°	30	8.05	9.48	
	393.70	390.40	31.75	19.81	22.73	38°	30	3.66	4.31	
DC-264	16.50	16.37	1.31	.780	.895	38°	30	9.14	10.77	
	419.10	415.80	33.28	19.81	22.73	38°	30	4.15	4.89	
DC-280	17.50	17.37	1.31	.780	.895	38°	30	10.25	12.08	
	444.50	441.20	33.28	19.81	22.73	38°	30	4.65	5.48	
DC-320	20.00	19.87	1.37	.780	.895	38°	36	14.08	16.59	
	508.00	504.70	34.80	19.81	22.73	38°	36	6.39	7.53	
*DC-320	20.00	19.87	1.38	.780	.895	38°	36			22.39
	508.00	504.70	35.06	19.81	22.73	38°	36			10.16
DC-384	24.00	23.87	1.37	.780	.895	38°	42	19.23	22.68	
	609.60	606.30	34.80	19.81	22.73	38°	42	8.73	10.29	

Inch Dimensions
Metric Dimensions

If weight is listed pulley is in production.

*11 Gauge Material Dimensions


A-1.75" O.D. FOR BORES .7505 TO .877
B-2.00" O.D. FOR BORES 1.0005 TO 1.252
C-2.50" O.D. FOR BORES 1.313 TO 1.502

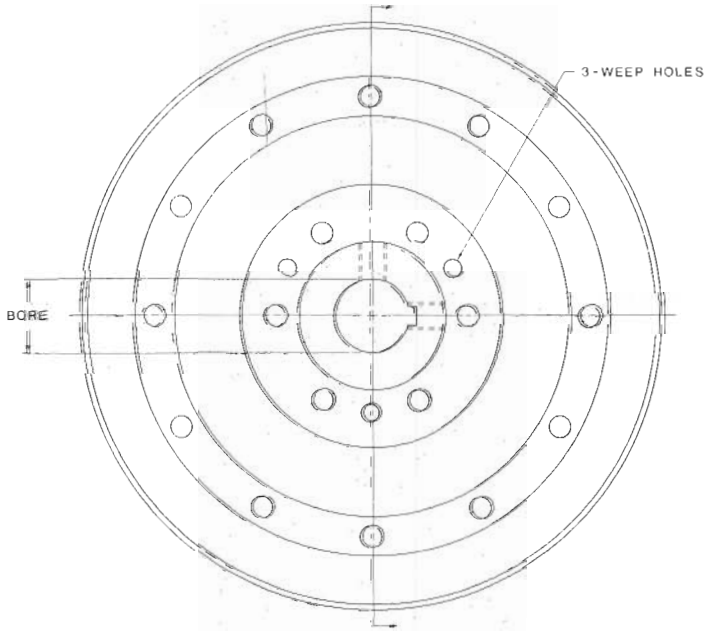

dondye COMPANY INC.®
1985

GENERAL SPECIFICATIONS OF SPECIAL GROOVE DRIVE PULLEYS

(Deep Groove, "A-B", "B", "C", "D", and others)

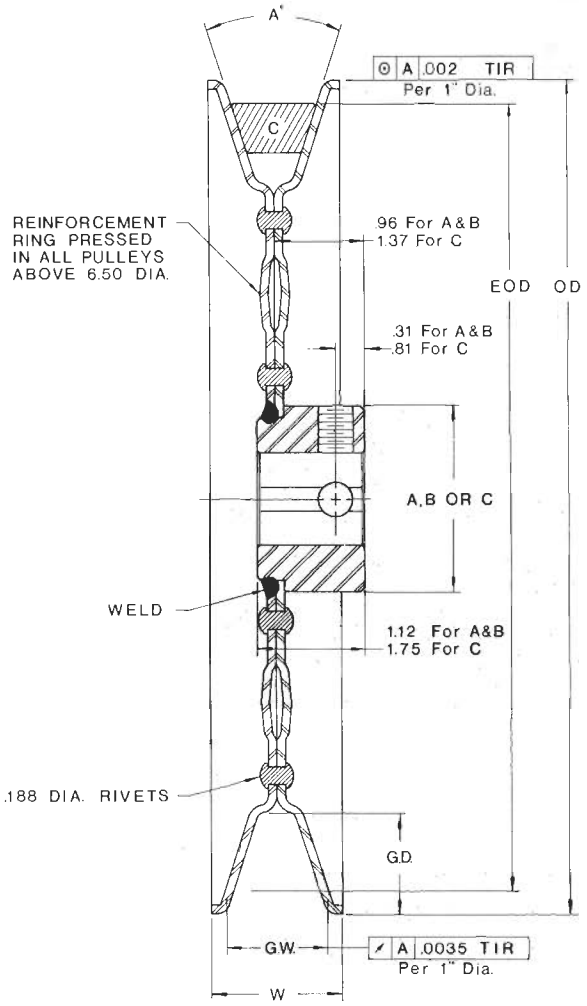


Pulley Part No.	O.D.	E.O.D.	Pulley Width	Groove Depth	Groove Width	Incl. Angle	No. Of Rivets	Belt Size	Approx. Wt./Ga. 14	13	11
DAB-80	5.00	4.62	1.06	.800	.685	34°	6	A or B	.78	.92	
	127.00	117.35	27.00	20.32	17.40	34°	6	A or B	.36	.42	
DDB-100	6.25	5.90	1.06	.760	.748	34°	18	B	1.34	1.57	
	158.75	149.90	27.00	19.30	19.00	34°	18	B	.61	.71	
DDC-120	7.50	7.00	1.43	1.085	1.06	34°	18	C	1.95	2.28	
	190.50	177.80	36.50	27.56	27.00	34°	18	C	.88	1.04	
DDC-128	8.00	7.50	1.43	1.085	1.06	34°	18	C	2.21	2.59	
	203.20	190.50	36.50	27.56	27.00	34°	18	C	1.00	1.18	
*DDC-128	8.00	7.50	1.48	1.085	1.06	34°	18	C			3.47
	203.20	190.50	37.60	27.56	27.00	34°	18	C			1.58
DDC-152	9.50	8.87	1.43	1.085	1.085	36°	21	C	3.10	3.64	
	241.30	225.30	36.50	27.56	27.56	36°	21	C	1.41	1.65	
DDC-160	10.00	9.38	1.50	1.09	1.09	36°	18	C			5.37
	254.00	238.25	38.10	27.70	27.70	36°	18	C			2.44
DDC-184	11.50	10.87	1.50	1.085	1.085	36°	24	C	4.50	5.29	
	292.10	276.10	38.10	27.56	27.56	36°	24	C	2.04	2.40	
DD-194	12.12	12.00	1.87	1.05	1.271	34°	24	D			8.02
	307.84	304.80	47.50	26.67	32.28	34°	24	D			3.64
DDC-200	12.50	11.87	1.43	1.085	1.085	36°	24	C	5.35	6.30	
	317.50	301.50	36.50	27.56	27.56	36°	24	C	2.43	2.86	

Inch Dimensions
Metric Dimensions

*11 Guage Material Dimensions


If weight is listed pulley is in production.


A-1.75" O.D. FOR BORES .7505 TO .877
B-2.00" O.D. FOR BORES 1.0005 TO 1.252
C-2.50" O.D. FOR BORES 1.313 TO 1.502

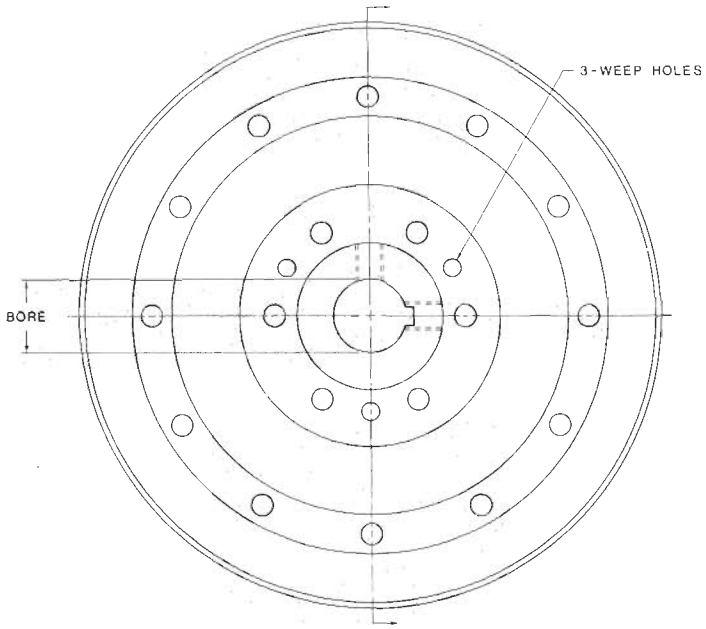


don dye COMPANY INC.®


1985

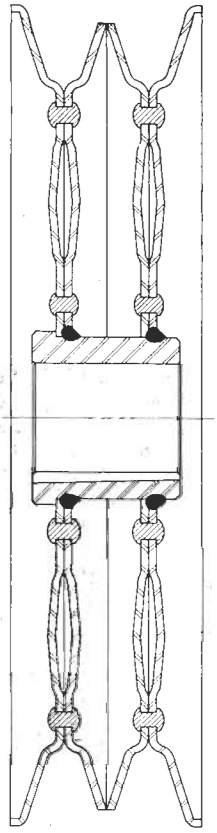

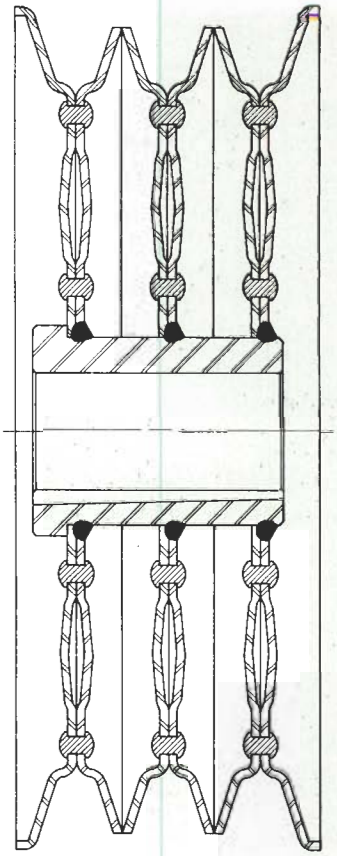


These combinations can be assembled from almost all drive pulleys listed in this catalog using either double row ball bearing or drive hub. Refer to lower right hand corner of page 9.

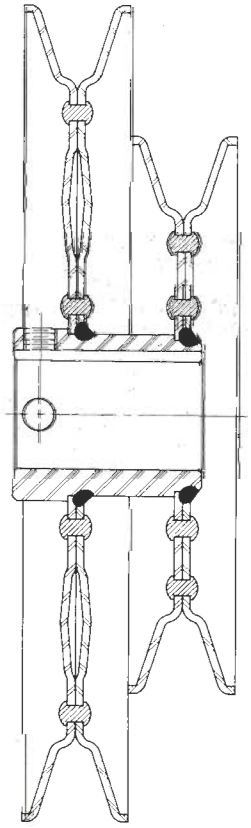


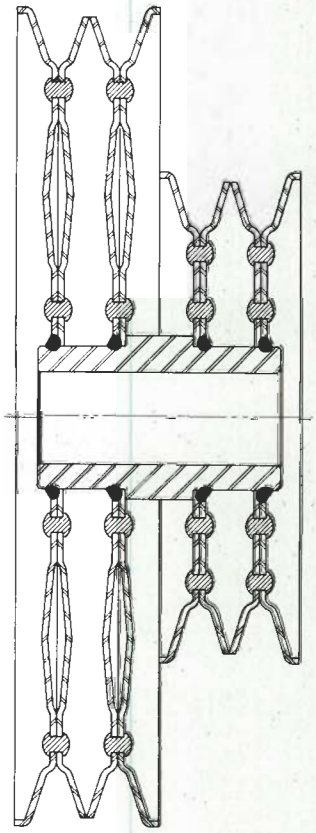

DRIVE PULLEY HUBS

(Standard & Special)
Bore Size Range
.6255 to .8770

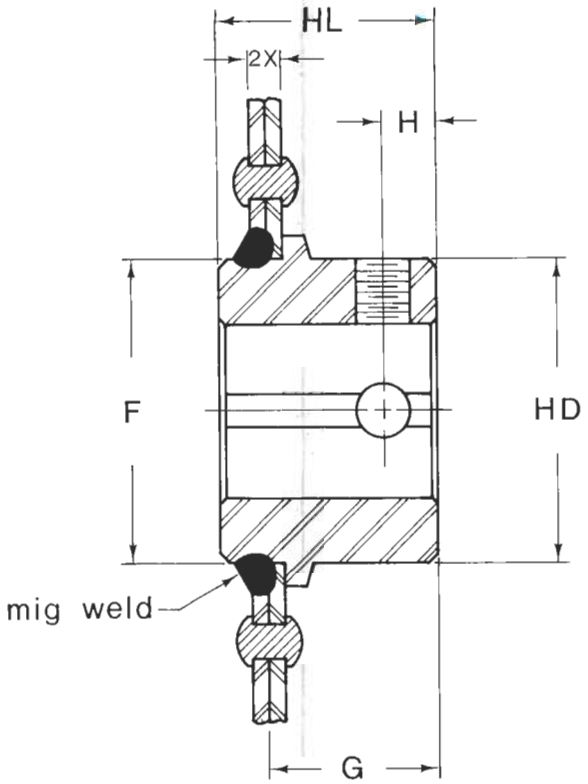

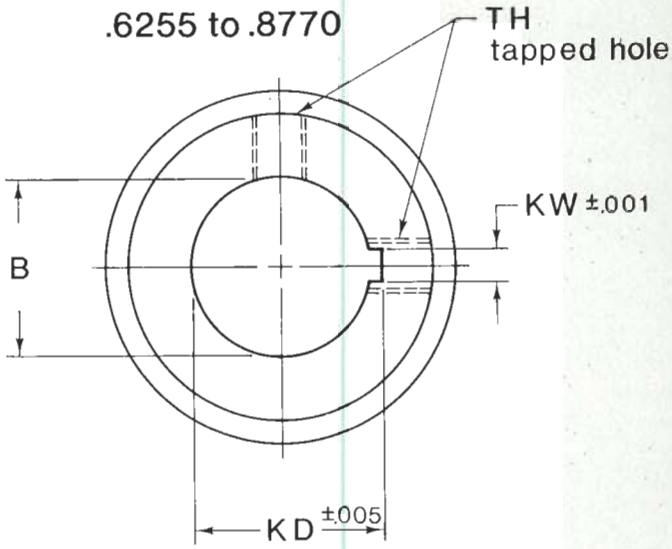

Hub Number	Bore B	KW	KD	HL	HD	F	G	H	TH	2X Max.
251	.6255/.627	.158	.695	1.12	1.50	1.75	.96	.31	5/16-18	13 ga.
	15.888/15.926	4.014	17.66	28.58	38.10	44.45	24.38	8.00	5/16-18	13 ga.
253	.6255/.627	.189	.719	1.12	1.50	1.75	.96	.31	5/16-18	13 ga.
	15.888/15.926	4.801	18.263	28.58	38.10	44.45	24.38	8.00	5/16-18	13 ga.
271	.688/.6895	.189	.782	1.12	1.75	1.75	.96	.31	5/16-18	13 ga.
	17.476/17.514	4.801	19.87	28.58	44.45	44.45	24.38	8.00	5/16-18	13 ga.
301	.7505/.752	.189	.837	1.12	1.75	1.75	.96	.31	5/16-18	13 ga.
	19.063/19.101	4.801	21.26	28.58	44.45	44.45	24.38	8.00	5/16-18	13 ga.
352	.7505/.752	.189	.837	1.40	1.75	1.75	1.12	.50	5/16-18	11 ga.
	19.063/19.101	4.801	21.26	35.56	44.45	44.45	28.58	12.70	5/16-18	11 ga.
361	.7505/.752	.189	.837	1.62	1.75	1.75	1.44	.38	3/8-16	13 ga.
	19.063/19.101	4.801	21.26	41.28	44.45	44.45	36.58	9.66	3/8-16	13 ga.
401	.8755/.8770	.189	.964	1.12	1.75	1.75	.96	.31	5/16-18	13 ga.
	22.238/22.276	4.801	24.50	28.58	44.45	44.45	24.38	8.00	5/16-18	13 ga.
403	.8755/.8770	.252	.990	1.12	1.75	1.75	.96	.31	3/8-16	13 ga.
	22.238/22.276	6.40	25.15	28.58	44.45	44.45	24.38	8.00	3/8-16	13 ga.
461	.8755/.8770	.252	.990	1.68	1.75	1.75	1.52	.59	3/8-16	13 ga.
	22.238/22.276	6.40	25.15	42.85	44.45	44.45	38.61	15.00	3/8-16	13 ga.

Inch Dimensions
Metric Dimensions

don dye COMPANY INC.®


1985


DRIVE PULLEY HUBS

(Standard & Special)

Bore Size Range

.9848 to 1.502

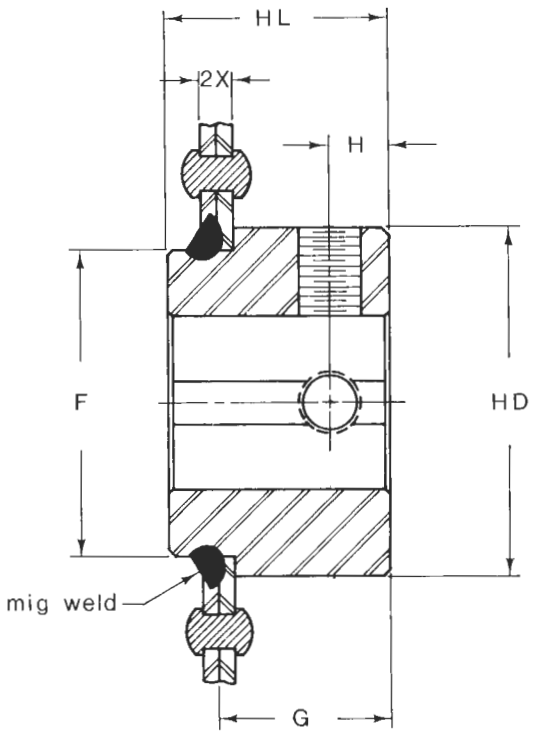

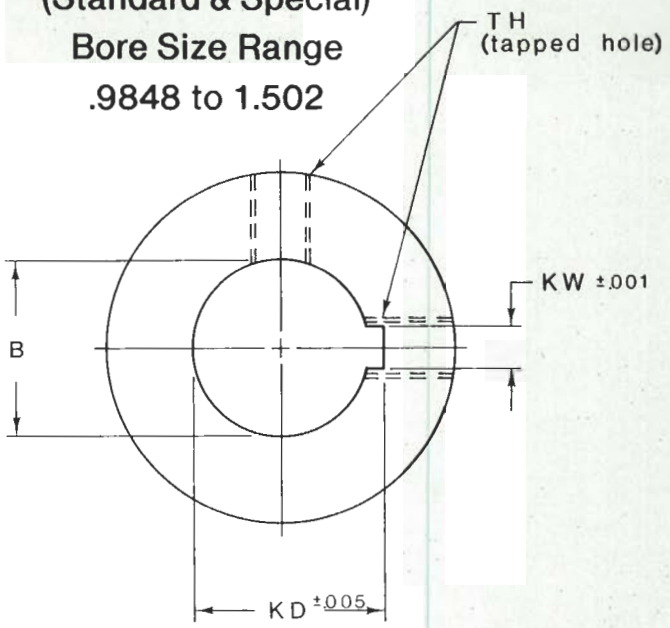


Hub Number	Bore B	KW	KD	HL	HD	F	G	H	TH	2X Max.
2575	.9848/.9870	.238	1.100	1.12	2.00	1.75	.96	.31	M8x1.25	13 ga.
	25.015/25.07	6.055	27.94	28.58	50.80	44.45	24.38	8.00	M8x1.25	13 ga.
2576	.9848/.9870	.238	1.100	1.12	2.00	1.75	.96	.31	M10x1.5	13 ga.
	25.015/25.07	6.055	27.94	28.58	50.80	44.45	24.38	8.00	M10x1.5	13 ga.
501	1.0005/1.002	.252	1.120	1.12	2.00	1.75	.96	.31	3/8-16	13 ga.
	25.413/25.451	6.40	28.45	28.58	50.80	44.45	24.38	8.00	3/8-16	13 ga.
508	1.0005/1.002	.189	1.095	1.12	2.00	1.75	.96	.31	3/8-16	13 ga.
	25.413/25.451	4.801	27.82	28.58	50.80	44.45	24.38	8.00	3/8-16	13 ga.
514	1.0005/1.002	.252	1.120	1.12	2.00	1.75	.96	.31	5/16-18	13 ga.
	25.413/25.451	6.40	28.45	28.58	50.80	44.45	24.38	8.00	5/16-18	13 ga.
554	1.0005/1.002	.3144	1.140	1.37	2.00	1.75	1.16	.31	3/8-16	11 ga.
	25.413/25.451	7.988	28.96	34.93	50.80	44.45	29.50	8.00	3/8-16	11 ga.
557	1.0005/1.002	.189	1.095	1.37	2.00	1.75	1.16	.50	3/8-16	11 ga.
	25.413/25.451	4.801	27.82	34.93	50.80	44.45	29.50	12.70	3/8-16	11 ga.
574	1.0005/1.002	.252	1.120	1.12	2.00	1.75	.88	.31	3/8-16	11 ga.
	25.413/25.451	6.40	28.45	28.58	50.80	44.45	22.36	8.00	3/8-16	11 ga.
601	1.1255/1.127	.252	1.246	1.12	2.00	1.75	.96	.31	3/8-16	13 ga.
	28.589/28.628	6.40	31.65	28.58	50.80	44.45	24.38	8.00	3/8-16	13 ga.
651	1.1255/1.127	.252	1.246	1.37	2.00	1.75	1.16	.50	3/8-16	11 ga.
	28.589/28.628	6.40	31.65	34.93	50.80	44.45	29.50	12.70	3/8-16	11 ga.
701	1.188/1.190	.252	1.305	1.12	2.00	1.75	.96	.31	3/8-16	13 ga.
	30.175/30.226	6.40	33.15	28.58	50.80	44.45	24.38	8.00	3/8-16	13 ga.
801	1.2505/1.252	.252	1.370	1.12	2.00	1.75	.96	.31	3/8-16	13 ga.
	31.763/31.801	6.40	34.80	28.58	50.80	44.45	24.38	8.00	3/8-16	13 ga.
805	1.2505/1.252	.3144	1.397	1.12	2.00	1.75	.96	.31	3/8-16	13 ga.
	31.763/31.801	7.988	35.49	28.58	50.80	44.45	24.38	8.00	3/8-16	13 ga.
809	1.2505/1.252	.3144	1.397	1.12	2.12	2.00	.96	.31	3/8-16	13 ga.
	31.763/31.801	7.988	35.49	28.58	53.85	50.80	24.38	8.00	3/8-16	13 ga.
840	1.2505/1.252	.252	1.370	1.50	2.00	1.75	.96	.31	3/8-16	11 ga.
	31.763/31.801	6.40	34.80	38.10	50.80	44.45	24.38	8.00	3/8-16	11 ga.
851	1.2505/1.252	.252	1.37	1.37	2.00	1.75	1.16	.50	3/8-16	11 ga.
	31.763/31.801	6.40	34.80	34.93	50.80	44.45	29.50	12.70	3/8-16	11 ga.
857	1.2505/1.252	.252	1.370	1.93	2.00	1.75	.96	.31	3/8-16	11 ga.
	31.763/31.801	6.40	34.80	49.03	50.80	44.45	24.38	8.00	3/8-16	11 ga.
919	1.3755/1.377	.252	1.496	1.37	2.12	2.00	1.16	.50	3/8-16	11 ga.
	34.938/34.976	6.40	38.00	34.93	53.85	50.80	29.50	12.70	3/8-16	11 ga.
931	1.181/1.183	.315	1.314	1.12	2.00	1.75	.96	.31	3/8-16	13 ga.
	30.00/30.05	8.001	33.38	28.58	50.80	44.45	24.38	8.00	3/8-16	13 ga.


Inch Dimensions
Metric Dimensions

1985

DRIVE PULLEY HUBS

(Standard & Special)
Bore Size Range
.9848 to 1.502

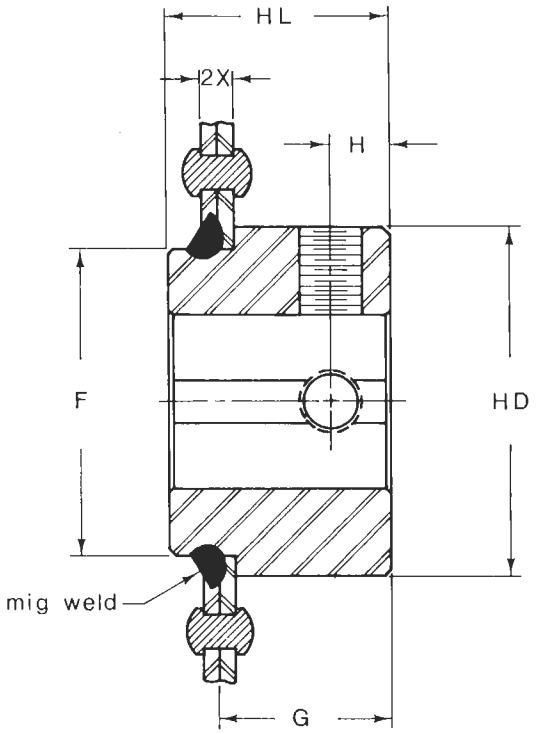

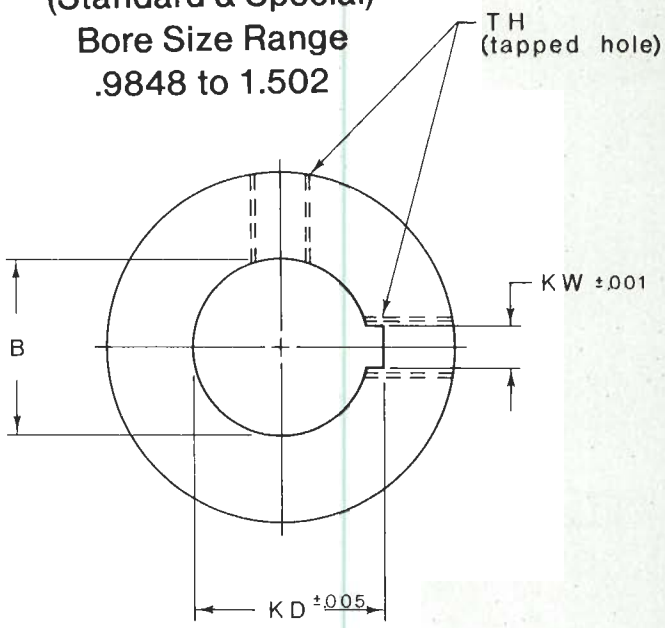

Hub Number	Bore B	KW	KD	HL	HD	F	G	H	TH	2X Max.
954	1.1255/1.127	.3144	1.268	2.25	2.00	1.75	.96	.31	3/8-16	11 ga.
	28.589/28.628	7.988	32.21	57.16	50.80	44.45	24.38	8.00	3/8-16	11 ga.
957	1.181/1.183	.238	1.294	2.28	2.00	1.75	.98	.31	M10x1.5	11 ga.
	30.00/30.05	6.055	32.88	58.00	50.80	44.45	24.90	8.00	M10x1.5	11 ga.
1500	1.5005/1.502	.377	1.674	1.75	2.50	2.38	1.38	.50	1/2-13	11 ga.
	38.113/38.151	9.58	42.52	44.45	63.50	60.46	35.06	12.70	1/2-13	11 ga.
3001	1.181/1.183	.3144	1.314	1.12	2.00	1.75	.96	.31	M8x1.25	13 ga.
	30.00/30.05	7.988	33.38	28.58	50.80	44.45	24.38	8.00	M8x1.25	13 ga.
3003	1.181/1.183	.3144	1.314	1.12	2.00	1.75	.96	.31	M10x1.5	13 ga.
	30.00/30.05	7.988	33.38	28.58	50.80	44.45	24.38	8.00	M10x1.5	13 ga.
3501	1.3789/1.3809	.396	1.511	1.12	2.12	2.00	.96	.31	M10x1.5	13 ga.
	35.024/35.074	10.06	38.38	28.58	53.85	50.80	24.38	8.00	M10x1.5	13 ga.


Inch Dimensions
Metric Dimensions




1985

DRIVE PULLEY HUBS

(Standard & Special)
Bore Size Range
1.0005 to 1.252

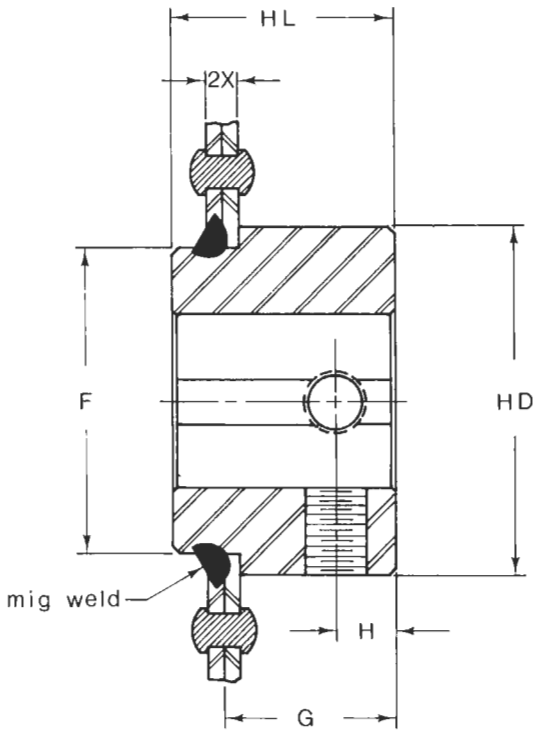

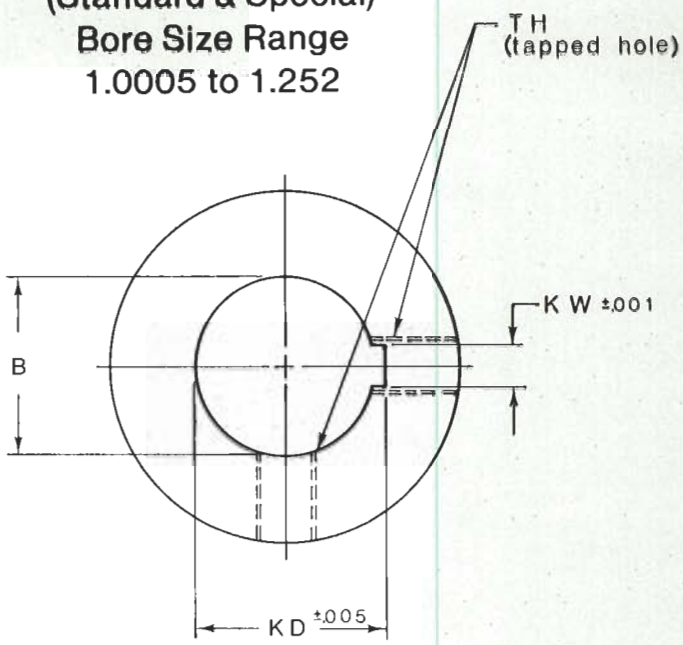


Hub Number	Bore B	KW	KD	HL	HD	F	G	H	TH	2X Max.
502	1.0005/1.002	.314	1.140	1.12	2.00	1.75	.96	.31	3/8-16	13 ga.
	25.413/25.451	7.976	28.96	28.58	50.80	44.45	24.38	8.00	3/8-16	13 ga.
561	1.0005/1.002	.252	1.120	1.69	2.00	1.75	1.52	.59	3/8-16	13 ga.
	25.413/25.451	6.40	28.45	42.93	50.80	44.45	38.61	15.00	3/8-16	13 ga.
761	1.188/1.190	.252	1.305	1.69	2.00	1.75	1.52	.59	3/8-16	13 ga.
	30.175/30.226	6.40	33.15	42.93	50.80	44.45	38.61	15.00	3/8-16	13 ga.
810	1.2505/1.252	.189	1.345	1.12	2.00	1.75	.96	.31	3/8-16	13 ga.
	31.763/31.801	4.80	34.17	28.58	50.80	44.45	24.38	8.00	3/8-16	13 ga.
2577	.9848/.9870	.238	1.100	1.12	2.00	1.75	.96	.31	M6x1	13 ga.
	25.015/25.07	6.055	27.94	28.58	50.80	44.45	24.38	8.00	M6x1	13 ga.
3002	1.181/1.183	.238	1.294	1.12	2.00	1.75	.96	.31	M10x1.5	13 ga.
	30.00/30.05	6.055	32.88	28.58	50.80	44.45	24.38	8.00	M10x1.5	13 ga.


Inch Dimensions
Metric Dimensions

don dye COMPANY INC.®
1985

DRIVE PULLEY HUBS

(Standard & Special)
Bore Size Range
1.2505 to 1.627

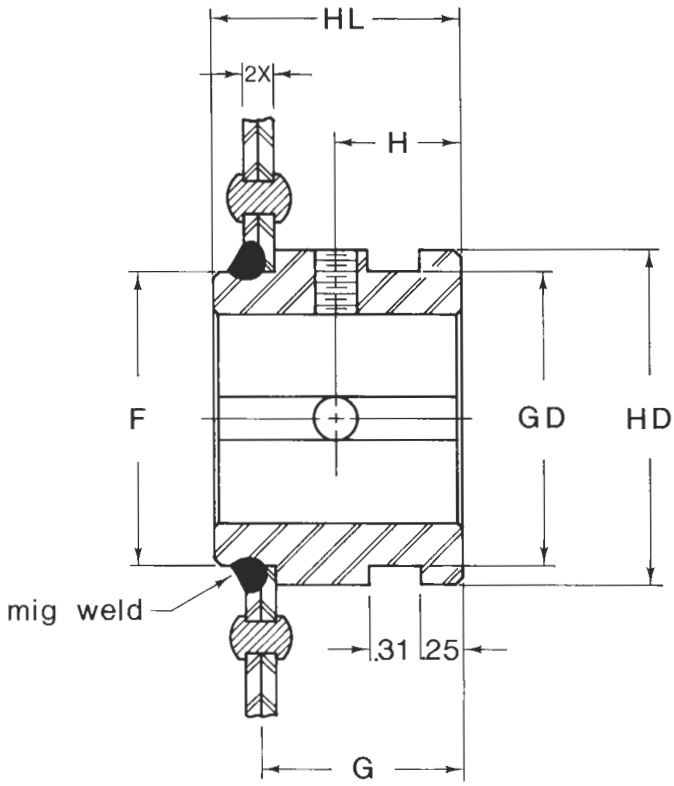

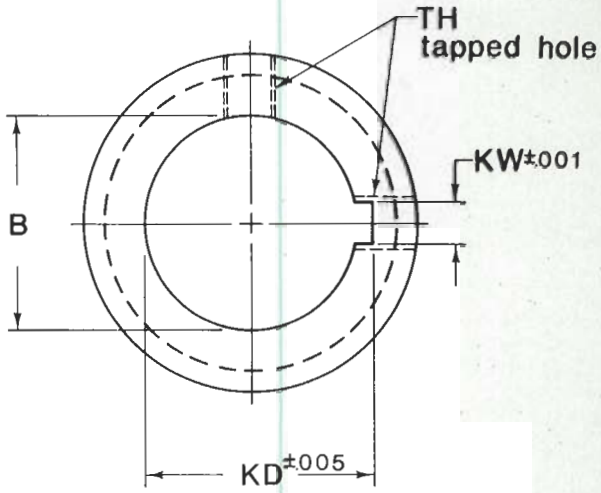

Hub Number	Bore B	KW	KD	HL	HD	GD	F	G	H	TH	2X Max.
861	1.2505/1.252	.252	1.370	1.62	2.00	1.75	1.75	1.46	.81	3/8-16	13 ga.
	31.763/31.801	6.40	34.80	41.27	50.80	44.45	44.45	37.08	20.57	3/8-16	13 ga.
1504	1.5005/1.502	.377	1.674	1.75	2.50	2.25	2.38	1.50	.81	3/8-16	11 ga.
	38.113/38.151	9.58	45.52	44.45	63.50	57.15	60.46	38.10	20.57	3/8-16	11 ga.
1507	1.4395/1.4425	.377	1.610	1.81	2.50	2.25	2.38	1.56	.81	3/8-16	11 ga.
	36.564/36.64	9.58	40.90	46.00	63.50	57.15	60.46	39.70	20.57	3/8-16	11 ga.
1510	1.6255/1.627	.377	1.80	1.75	2.50	2.25	2.38	1.50	.81	3/8-16	11 ga.
	41.288/41.326	9.58	45.73	44.45	63.50	57.15	60.46	38.10	20.57	3/8-16	11 ga.
1512	1.4395/1.4380	.377	1.610	1.75	2.50	2.25	2.38	1.50	.81	3/8-16	11 ga.
	36.564/36.526	9.58	40.90	44.45	63.50	57.15	60.46	38.10	20.57	3/8-16	11 ga.


Inch Dimensions
Metric Dimensions


don dye COMPANY INC.

1985

DRIVE PULLEY HUBS

(Special Pin Holes)
Bore Size Range
.8755 to 1.502

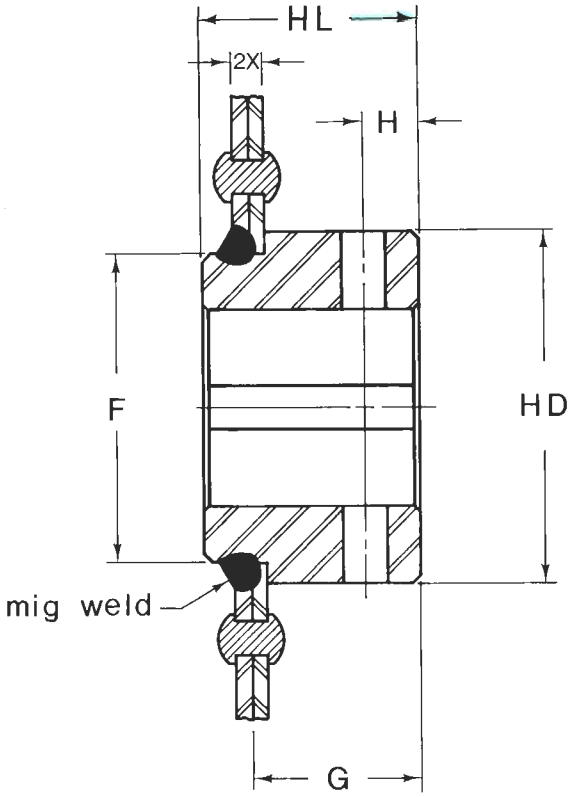

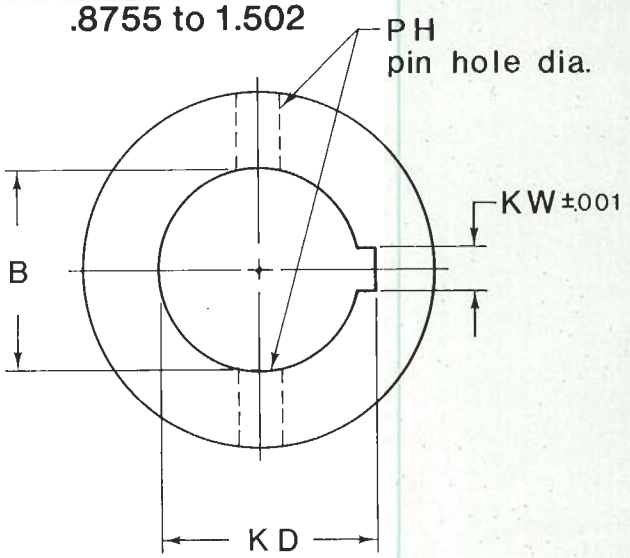


Hub Number	Bore B	HL	HD	F	G	H	PH	KW	KD	2X Max.
402	.8755/.8770	1.12	1.75	1.75	.96	.31	.257			13 ga.
	22.238/22.276	28.58	44.45	44.45	24.38	8.00	6.528			13 ga.
404	.8755/.8770	1.12	1.75	1.75	.96	.31	.312			13 ga.
	22.238/22.276	28.58	44.45	44.45	24.38	8.00	7.93			13 ga.
410	.8755/.8770	1.12	1.75	1.75	.96	.31	.328			13 ga.
	22.238/22.276	28.58	44.45	44.45	24.38	8.00	8.34			13 ga.
504	1.0005/1.002	1.12	2.00	1.75	.96	.31	.390			13 ga.
	25.413/25.451	28.58	50.80	44.45	24.38	8.00	99.07			13 ga.
505	1.0005/1.002	1.12	2.00	1.75	.96	.31	.250	.252	1.120	13 ga.
	25.413/25.451	28.58	50.80	44.45	24.38	8.00	6.35	6.40	28.45	13 ga.
506	1.0005/1.002	1.12	2.00	1.75	.96	.31	.312	.252	1.120	13 ga.
	25.413/25.451	28.58	50.80	44.45	24.38	8.00	7.93	6.40	28.45	13 ga.
507	1.0005/1.002	1.12	2.00	1.75	.96	.31	.312			13 ga.
	25.413/25.451	28.58	50.80	44.45	24.38	8.00	7.93			13 ga.
509	1.0005/1.002	1.12	2.00	1.75	.96	.31	.328			13 ga.
	25.413/25.451	28.58	50.80	44.45	24.38	8.00	8.34			13 ga.
510	1.0005/1.002	1.12	1.75	1.75	.96	.31	.328			13 ga.
	25.413/25.451	28.58	44.45	44.45	24.38	8.00	8.34			13 ga.
513	1.0005/1.002	1.12	2.00	1.75	.96	.31	.250			13 ga.
	25.413/25.451	28.58	50.80	44.45	24.38	8.00	6.35			13 ga.
552	1.0005/1.002	1.37	2.00	1.75	1.16	.31	.250	.252	1.120	11 ga.
	25.413/25.451	34.93	50.80	44.45	29.50	8.00	6.35	6.40	28.45	11 ga.
558	1.0005/1.002	1.25	2.00	1.75	.96	.38	.257	.252	1.120	13 ga.
	25.413/25.451	31.75	50.80	44.45	24.38	9.66	6.528	6.40	28.45	13 ga.
559	1.0005/1.002	1.37	2.00	1.75	1.16	.31	.252			11 ga.
	25.413/25.451	34.93	50.80	44.45	29.50	8.00	6.40			11 ga.
652	1.1255/1.127	1.37	2.00	1.75	1.16	.31	.250	.252	1.246	11 ga.
	28.589/28.628	34.93	50.80	44.45	29.50	8.00	6.35	6.40	31.65	11 ga.
653	1.1255/1.127	1.37	2.00	1.75	1.16	.31	.312			11 ga.
	28.589/28.628	34.93	50.80	44.45	29.50	8.00	7.93			11 ga.
804	1.2505/1.252	1.12	2.00	1.75	.96	.31	.250			13 ga.
	31.763/31.801	28.58	50.80	44.45	24.38	8.00	6.35			13 ga.
902	.876/.878	1.06	2.00	1.75	.81	.31	.323			13 ga.
	22.250/22.301	26.93	50.80	44.45	20.58	8.00	8.21			13 ga.
1506	1.5005/1.502	2.20	2.12	2.00	1.68	.53	.594 & .406			11 ga.
	38.113/38.151	55.88	53.85	50.80	42.70	13.47	15.09/10.31			11 ga.


Inch Dimensions
Metric Dimensions

1985

DRIVE PULLEY HUBS

(Special Hex Bores)
Hex Bore Size Range
.8755 to 1.502

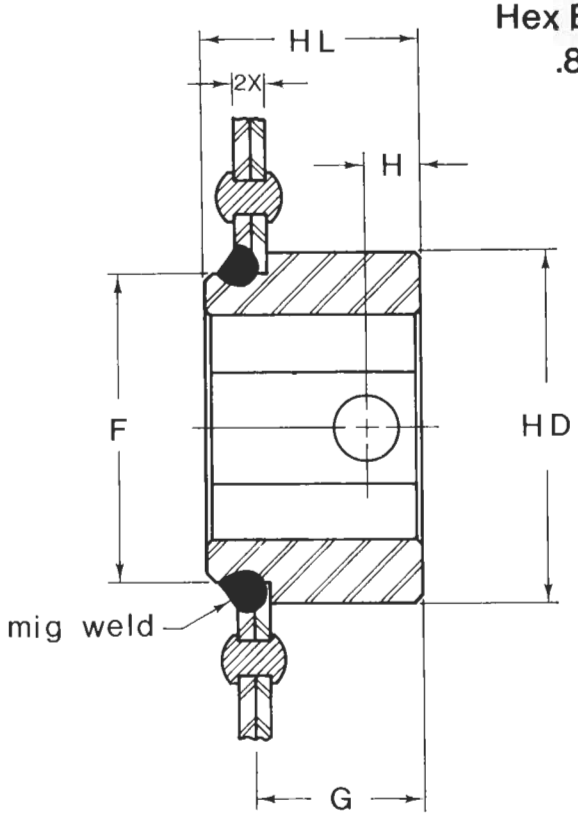

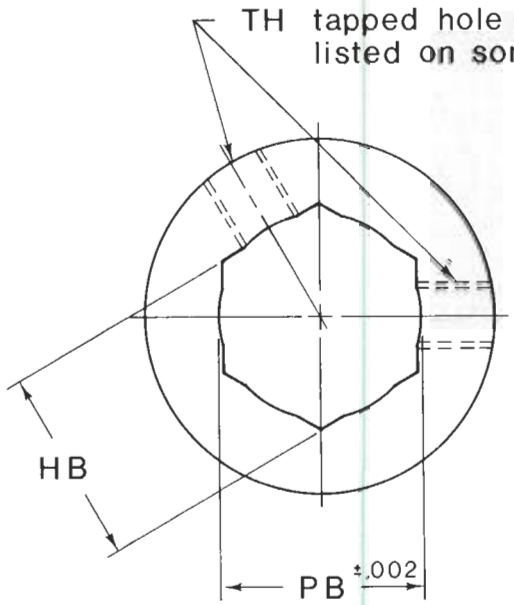

Hub Number	Hex Bore HB	Pilot Bore PB	HL	HD	F	G	H	TH (Opt.)	2X Max.
525	1.002/1.006	1.012	1.125	2.00	1.75	.96	.31	3/8-16	13 ga.
	25.45/25.56	25.71	28.58	50.80	44.45	24.38	8.00	3/8-16	13 ga.
607	1.126/1.130	1.137	1.125	2.00	1.750	.96			13 ga.
	28.60/28.70	28.88	28.58	50.80	44.45	24.38			13 ga.
947	.8745/.8775	.891	1.125	1.75	1.75	.96	.31	5/16-18	13 ga.
	22.21/22.29	22.63	28.58	44.48	44.45	24.38	8.00	1 hole only	13 ga.
955	1.002/1.006	1.012	.79	2.00	1.75	.58			11 ga.
	25.45/25.56	25.71	20.07	50.80	44.45	14.73			11 ga.
956	1.501/1.505	1.520	.98	2.50	2.37	.70			11 ga.
	38.13/38.23	38.61	24.90	63.50	60.20	17.79			11 ga.
1511	1.501/1.505	1.520	2.25	2.50	2.37	1.56			11 ga.
	38.13/38.23	38.61	57.16	63.50	60.20	39.63			11 ga.

Inch Dimensions
Metric Dimensions


1985

DRIVE PULLEY HUBS

(Special Taper Key)

Bore Size Range

1.0005 to 1.502

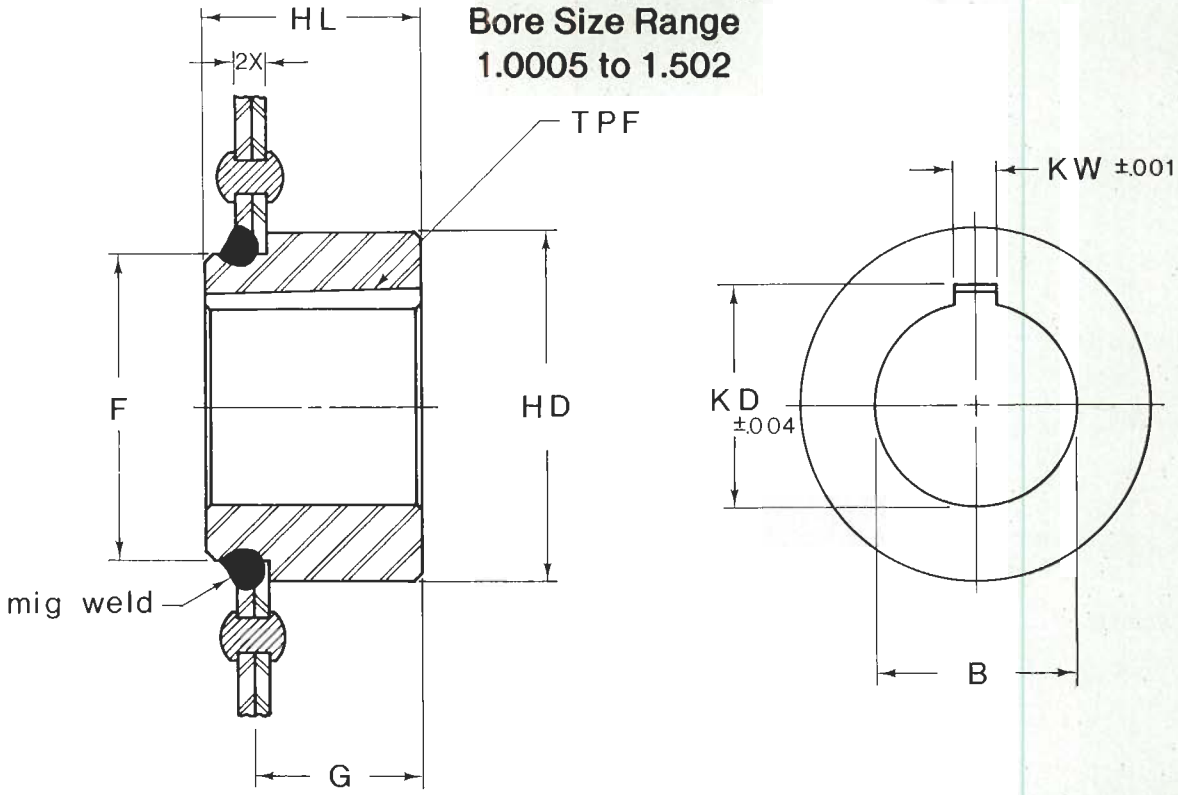

Hub Number	Bore B	TPF	KW	KD	HL	HD	F	G	2X Max.
511	1.0005/1.002	.312	.252	1.106	1.12	2.00	1.75	.96	13 ga.
	25.413/25.45	7.925	6.40	28.10	28.58	50.80	44.45	24.38	13 ga.
602	1.1255/1.127	.312	.314	1.274	1.12	2.00	1.75	.96	13 ga.
	28.589/28.628	7.925	7.976	32.36	28.58	50.80	44.45	24.38	13 ga.
803	1.2505/1.252	.312	.252	1.356	1.12	2.00	1.75	.96	13 ga.
	31.763/31.801	7.925	6.40	34.45	28.58	50.80	44.45	24.38	13 ga.
859	1.2505/1.252	.312	.377	1.431	1.93	2.12	2.00	1.71	11 ga.
	31.763/31.801	7.925	9.576	36.35	49.03	53.85	50.80	43.44	11 ga.
904	1.3755/1.380	.312	.377	1.557	1.93	2.12	2.00	1.71	11 ga.
	34.938/35.053	7.925	9.576	39.548	49.03	53.85	50.80	43.44	11 ga.
905	1.3755/1.380	.312	.377	1.557	1.93	2.12	2.00	.72	11 ga.
	34.938/35.053	7.925	9.576	39.548	49.03	53.85	50.80	18.30	11 ga.
1509	1.5005/1.503	.312	.377	1.670	1.93	2.50	2.37	.70	11 ga.
	38.113/38.117	7.925	9.576	42.42	49.03	63.50	60.20	17.78	11 ga.


Inch Dimensions
Metric Dimensions

dondye COMPANY INC.®

1985

DRIVE PULLEY HUBS

(Special Taper Bore)
Bore Size Range
.684 to 1.252

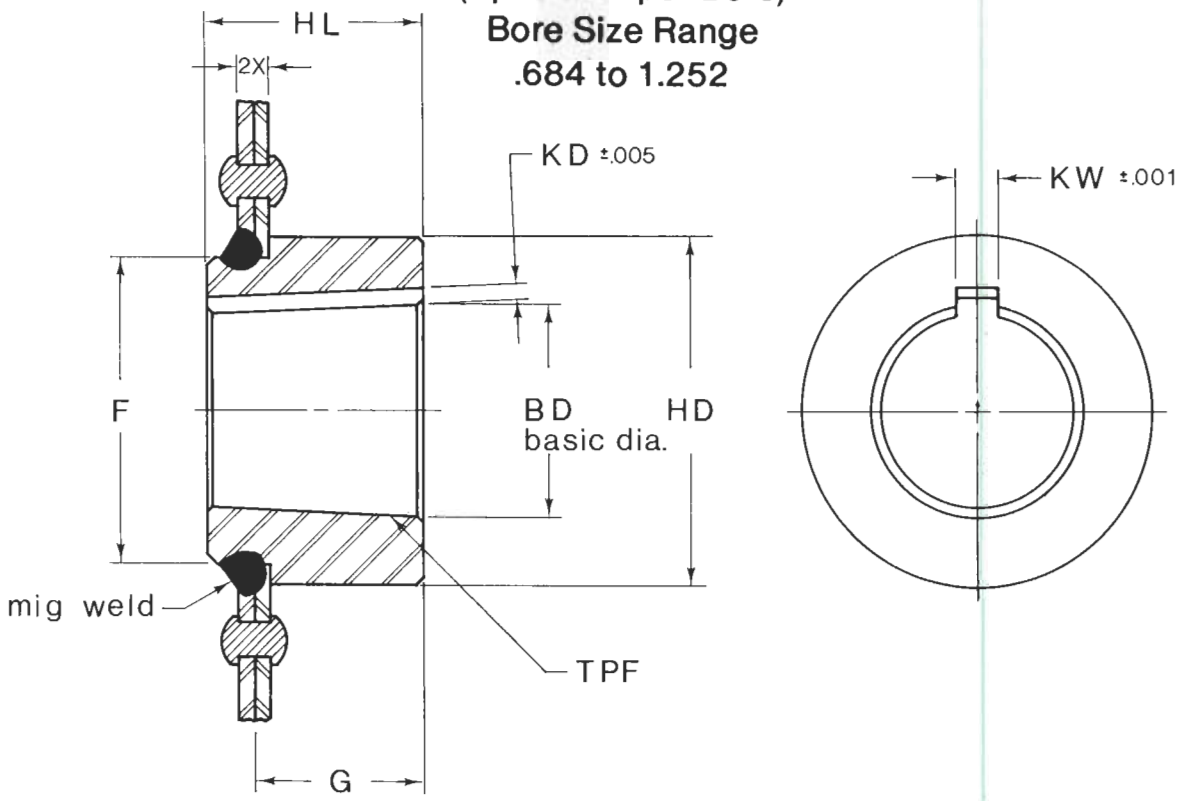

Hub Number	BD	TPF	KW	KD	HL	HD	F	G	2X Max.
909	.684/.685	1.00/5.00	.158	.087	1.12	1.75	1.75	.96	13 ga.
	17.374/17.40	25.40/127.00	4.014	2.21	28.58	44.45	44.45	24.38	13 ga.
915	1.248/1.252	1.500	.252	.129	1.12	2.00	1.75	.96	13 ga.
	31.70/31.80	38.10	6.40	3.278	28.58	50.80	44.45	24.38	13 ga.
926	.684/.685	1.00/5.00	.158	.087	.906	1.75	1.75	.75	13 ga.
	17.374/17.40	25.40/127.00	4.014	2.21	23.02	44.45	44.45	19.05	13 ga.
966	.984/.988	1.500	.252	.118	1.12	2.00	1.75	.75	11 ga.
	25.00/25.10	38.10	6.40	3.00	28.58	50.80	44.45	19.05	11 ga.

Inch Dimensions
Metric Dimensions

don dye COMPANY INC.®

1985

STAMPED BOLT HOLES AND CENTER HOLE LAYOUTS (BHL)

(Designed for bolting to customers hubs)


Minimum pulley diameter and material gauge of pulley is shown in each block.

New designs added, at no cost to the customer, if quantities warrant.

(Unless otherwise specified tolerances are ±.005)


metric

BHL - 1

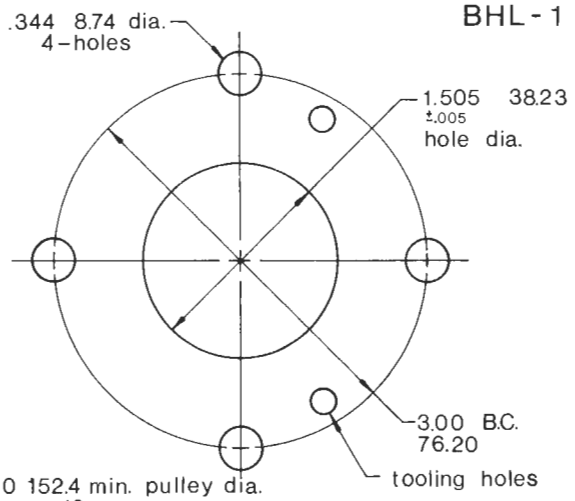


6.00 152.4 min. pulley dia.
14ga. or 13ga.

BHL - 1A

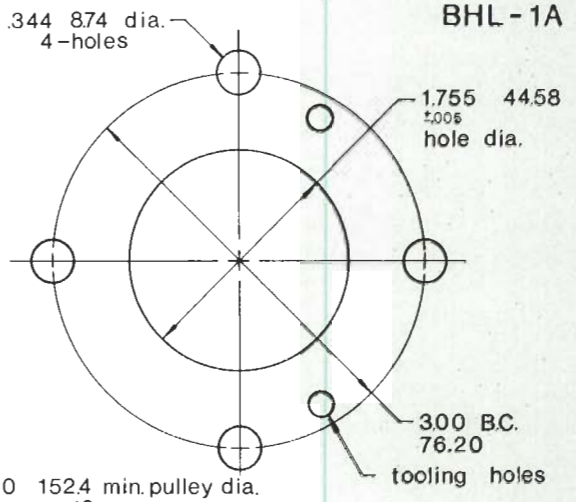


6.00 152.4 min. pulley dia.
14ga. or 13ga.

BHL - 1B

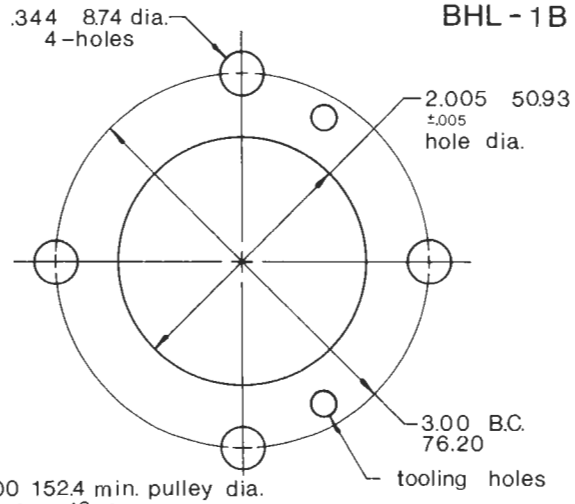


6.00 152.4 min. pulley dia.
14ga. or 13ga.

BHL - 1C

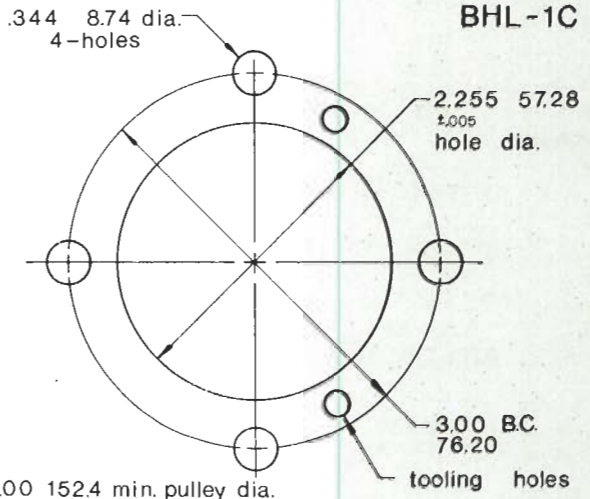


6.00 152.4 min. pulley dia.
14ga. or 13ga.

BHL - 2

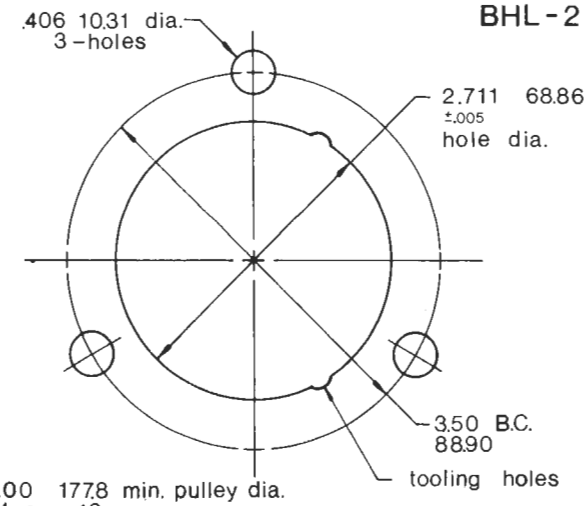

7.00 177.8 min. pulley dia.
14ga. or 13ga.

BHL - 2A

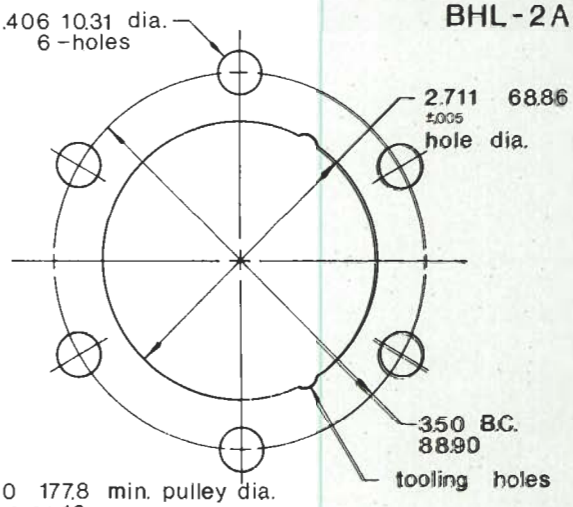

7.00 177.8 min. pulley dia.
14ga. or 13ga.

1985

STAMPED BOLT HOLES AND CENTER HOLE LAYOUTS (BHL)

(Designed for bolting to customers hubs)


Minimum pulley diameter and material gauge of pulley is shown in each block.

New designs added, at no cost to the customer, if quantities warrant.

(Unless otherwise specified tolerances are ±.005)


metric

BHL-3

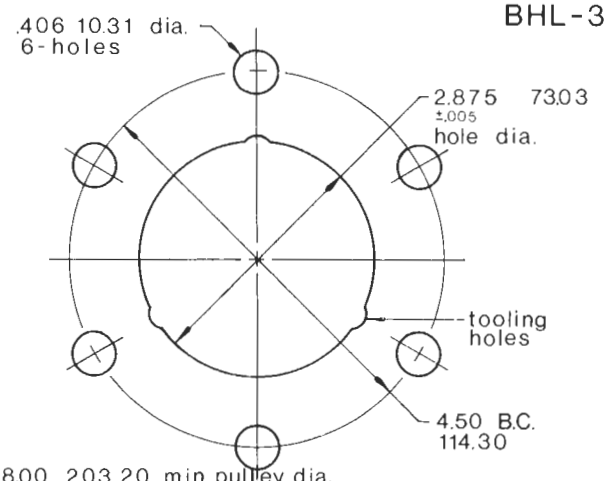


8.00 203.20 min. pulley dia.
14 ga. or 13 ga.

BHL-3A

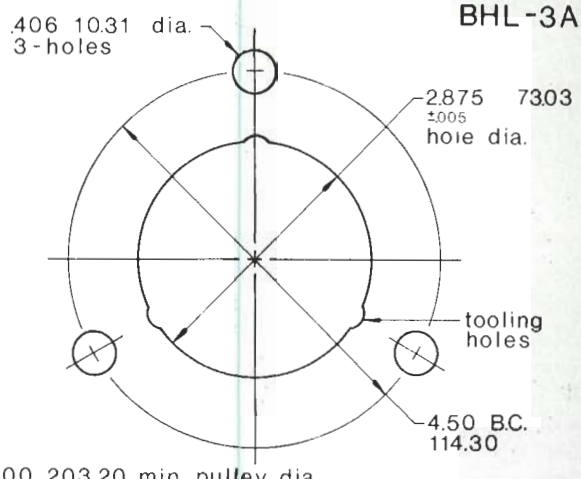


8.00 203.20 min. pulley dia.
14 ga. or 13 ga.

BHL-4

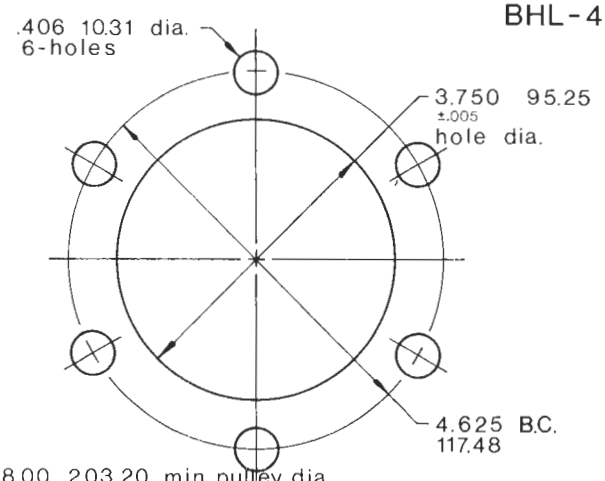


8.00 203.20 min. pulley dia.
14 ga. or 13 ga.

BHL-4A

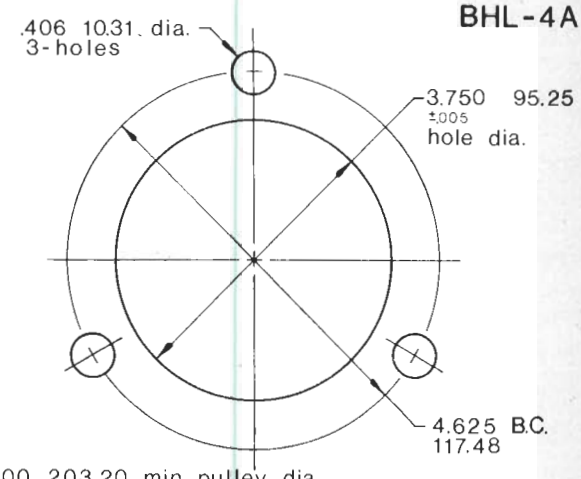


8.00 203.20 min. pulley dia.
14 ga. or 13 ga.

BHL-5

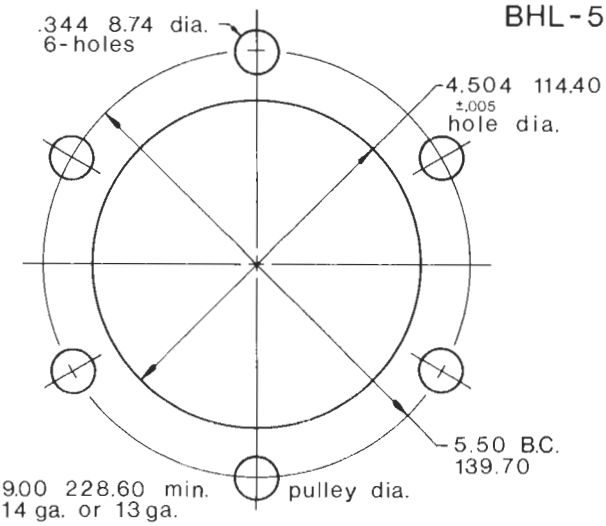

9.00 228.60 min. pulley dia.
14 ga. or 13 ga.

BHL-5A

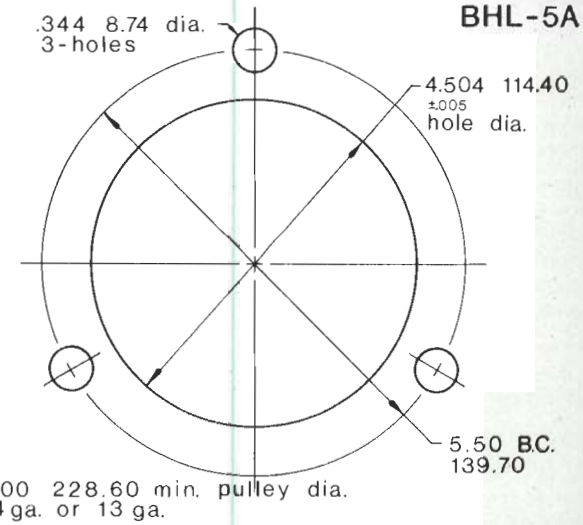

9.00 228.60 min. pulley dia.
14 ga. or 13 ga.

1985

STAMPED BOLT HOLES AND CENTER HOLE LAYOUTS (BHL)


(Designed for bolting to customers hubs)

Minimum pulley diameter and material gauge of pulley is shown in each block.

New designs added, at no cost to the customer, if quantities warrant.


(Unless otherwise specified tolerances are ±.005) metric

BHL-6

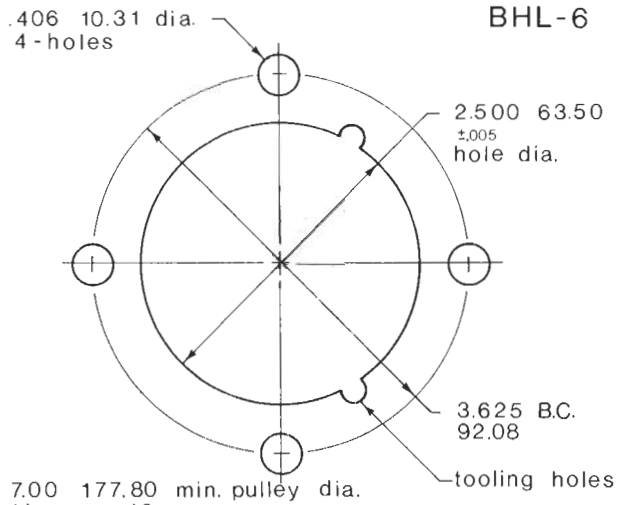


7.00 177.80 min. pulley dia.
14 ga. or 13 ga.

BHL-6A

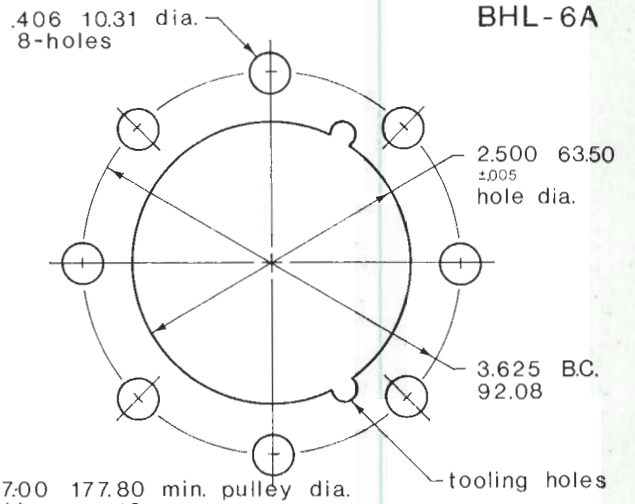


7.00 177.80 min. pulley dia.
14 ga. or 13 ga.

BHL-7

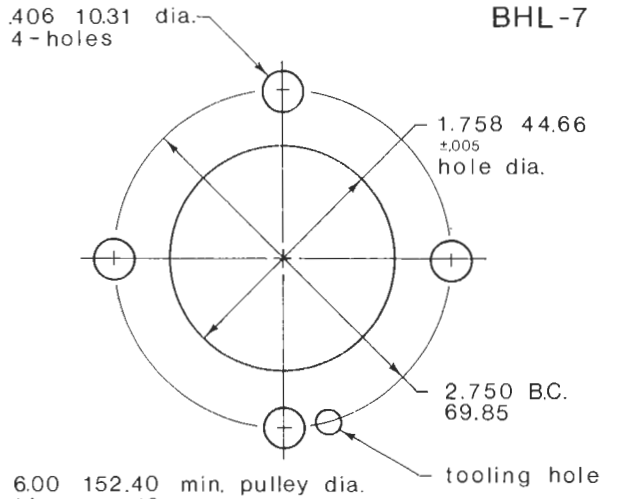


6.00 152.40 min. pulley dia.
14 ga. or 13 ga.

BHL-7A

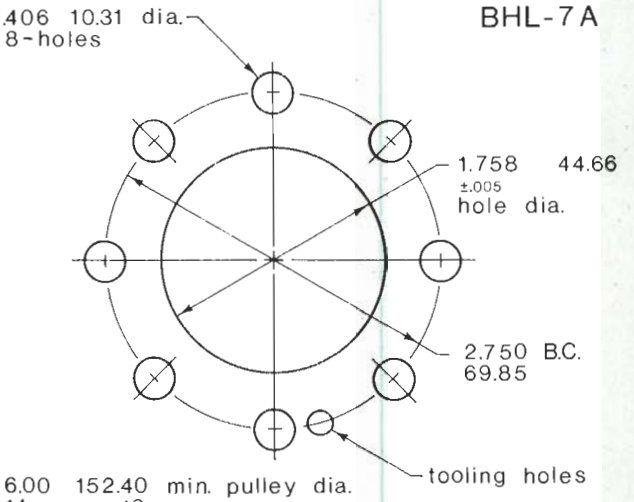


6.00 152.40 min. pulley dia.
14 ga. or 13 ga.

BHL-8

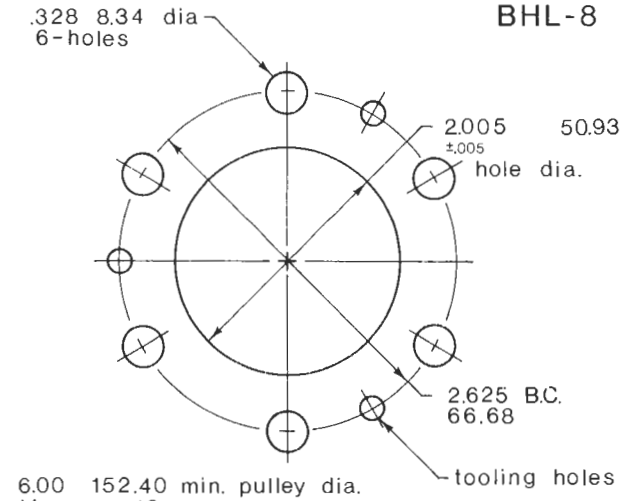

6.00 152.40 min. pulley dia.
14 ga. or 13 ga.

BHL-8A

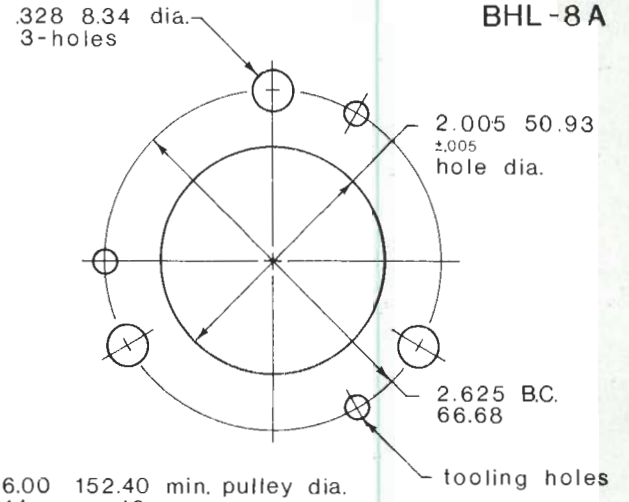

6.00 152.40 min. pulley dia.
14 ga. or 13 ga.

1985

STAMPED BOLT HOLES AND CENTER HOLE LAYOUTS (BHL)


(Designed for bolting to customers hubs)

Minimum pulley diameter and material gauge of pulley is shown in each block.

New designs added, at no cost to the customer, if quantities warrant.


(Unless otherwise specified tolerances are ±.005) metric

BHL-9

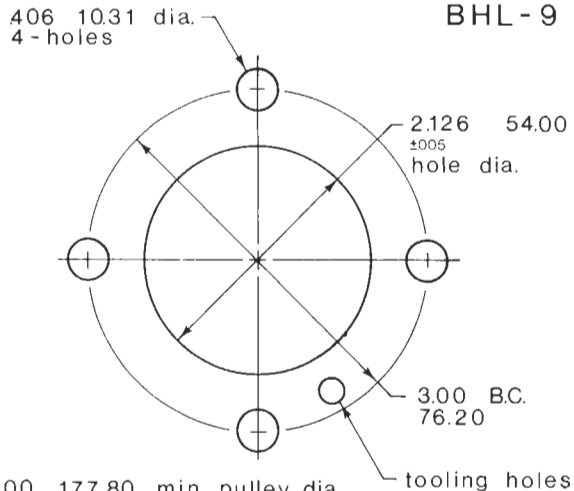


7.00 177.80 min. pulley dia.
14 ga. or 13 ga.

BHL-10

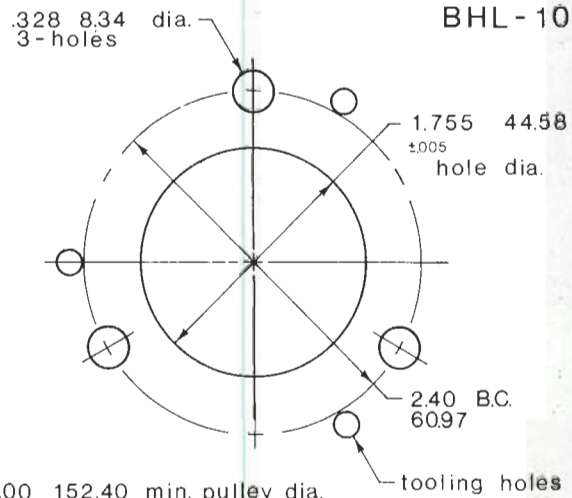


6.00 152.40 min. pulley dia.
14 ga. or 13 ga.

BHL-10A

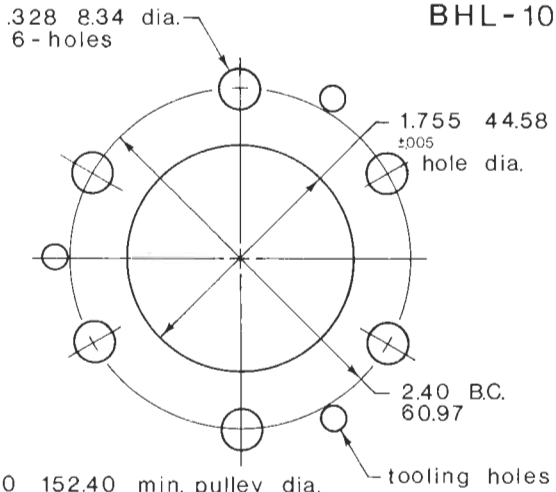


6.00 152.40 min. pulley dia.
14 ga. or 13 ga.

BHL-11

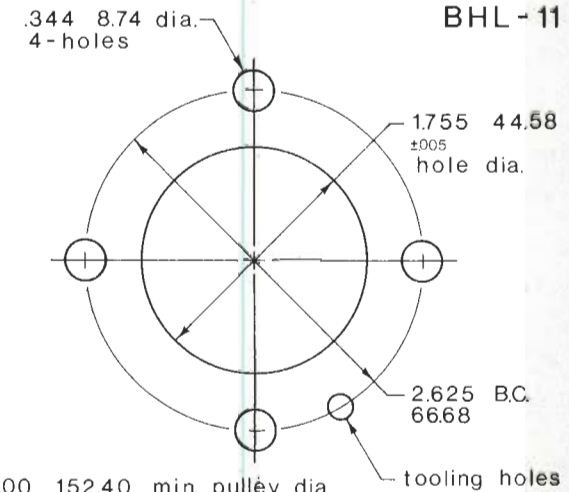


6.00 152.40 min. pulley dia.
14 ga. or 13 ga.

BHL-12

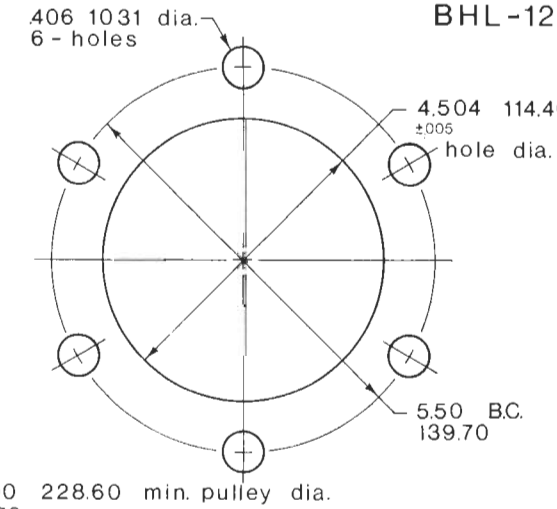

9.00 228.60 min. pulley dia.
11 ga.

BHL-12A

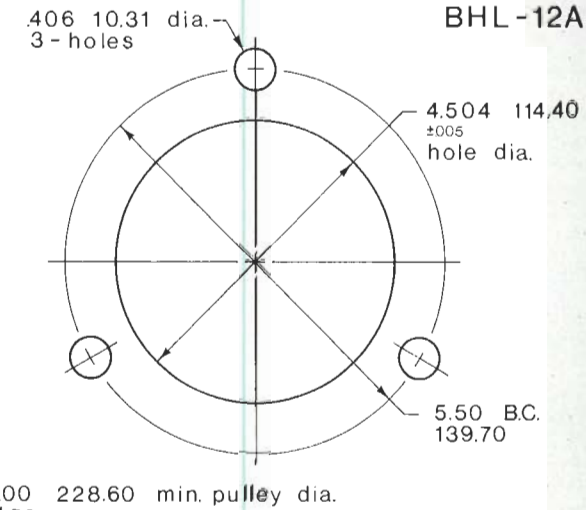

9.00 228.60 min. pulley dia.
11 ga.

1985

STAMPED BOLT HOLES AND CENTER HOLE LAYOUTS (BHL)


(Designed for bolting to customers hubs)

Minimum pulley diameter and material gauge of pulley is shown in each block.

New designs added, at no cost to the customer, if quantities warrant.


(Unless otherwise specified tolerances are ±.005) **metric**

BHL-13

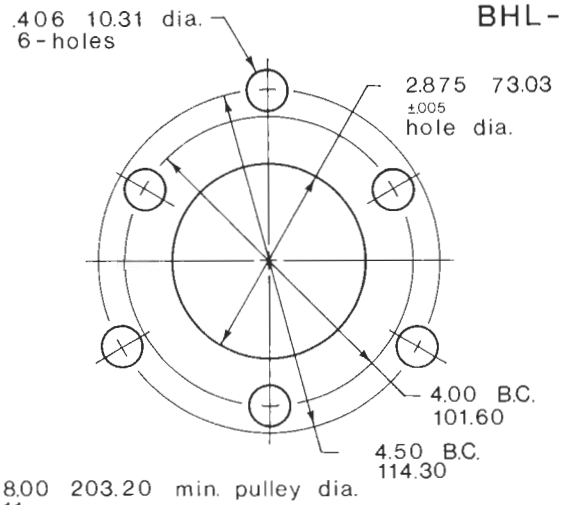


8.00 203.20 min. pulley dia.
11ga.

BHL-14

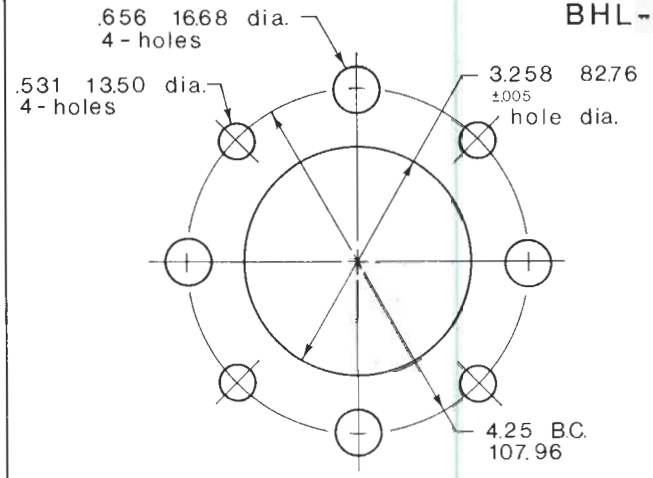


9.00 228.60 min. pulley dia.
14ga. or 13ga.

BHL-16

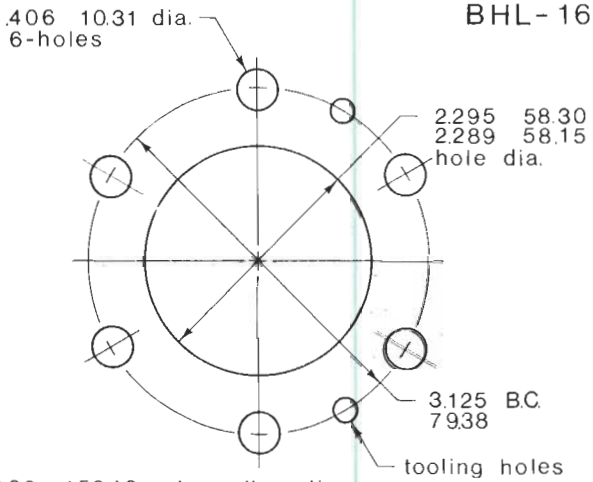


6.00 152.40 min. pulley dia.
14ga. or 13ga.

BHL-16A

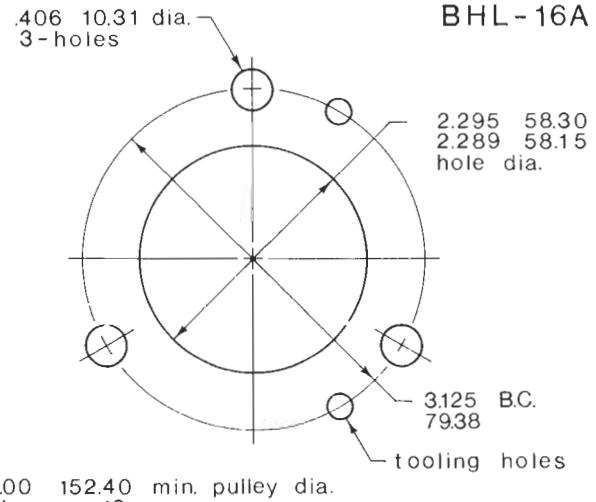

6.00 152.40 min. pulley dia.
14ga. or 13ga.

BHL-17

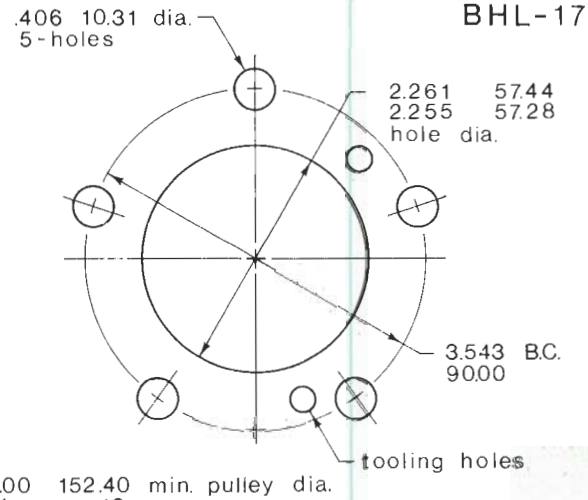

6.00 152.40 min. pulley dia.
14ga. or 13ga.

1985

STAMPED BOLT HOLES AND CENTER HOLE LAYOUTS (BHL)


(Designed for bolting to customers hubs)

Minimum pulley diameter and material gauge of pulley is shown in each block.

New designs added, at no cost to the customer, if quantities warrant.


(Unless otherwise specified tolerances are ±.005) metric

BHL-18A

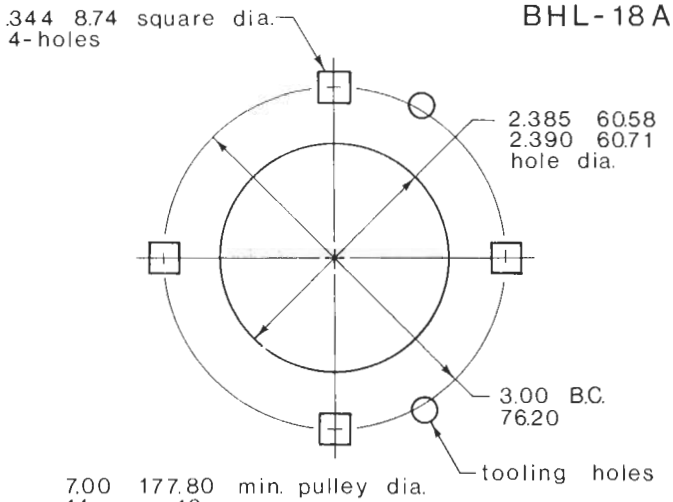


7.00 177.80 min. pulley dia.
14ga. or 13ga.

BHL-19

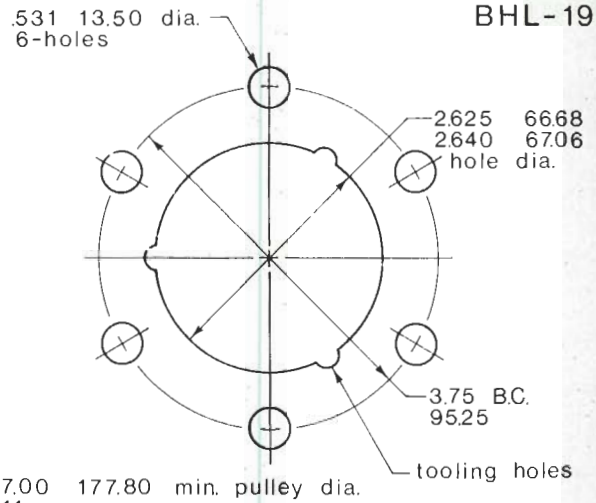


7.00 177.80 min. pulley dia.
11ga.

BHL-20

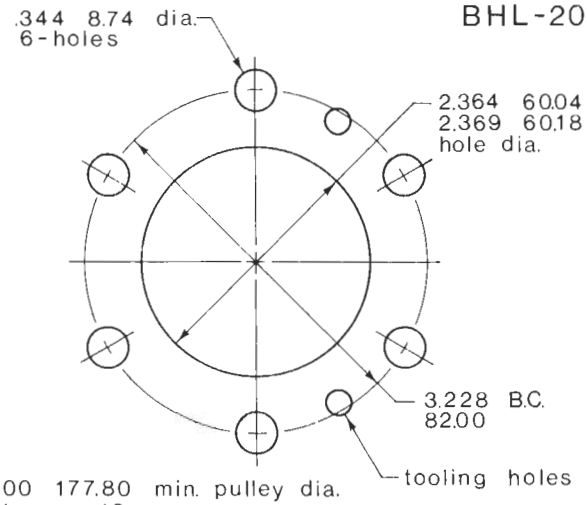


7.00 177.80 min. pulley dia.
14ga. or 13ga.

BHL-20A

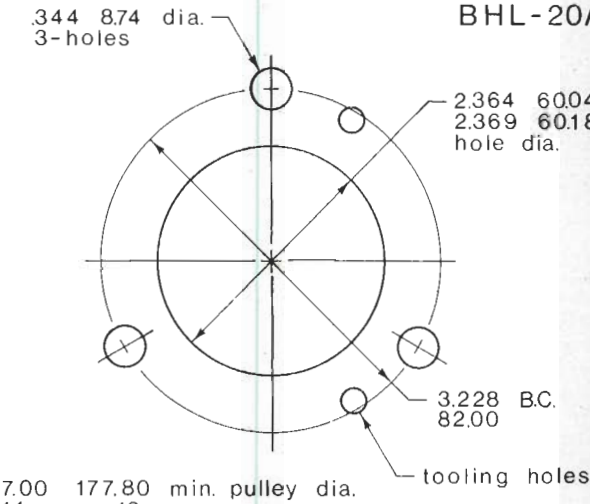

7.00 177.80 min. pulley dia.
14ga. or 13ga.

BHL-21

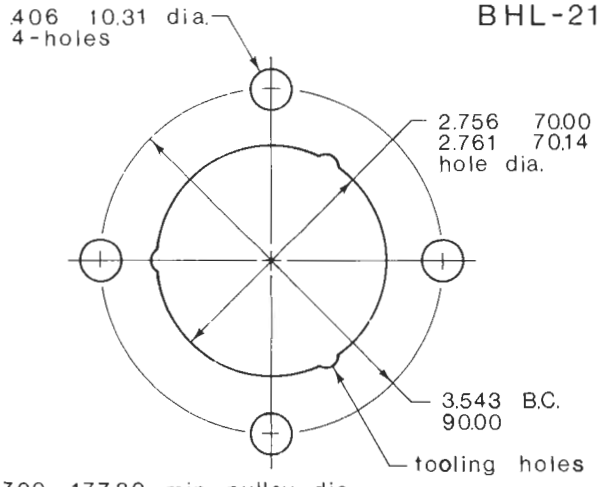

7.00 177.80 min. pulley dia.
14ga. or 13ga.

1985

STAMPED BOLT HOLES AND CENTER HOLE LAYOUTS (BHL)


(Designed for bolting to customers hubs)

Minimum pulley diameter and material gauge of pulley is shown in each block.

New designs added, at no cost to the customer, if quantities warrant.


(Unless otherwise specified tolerances are ±.005) metric

BHL-23

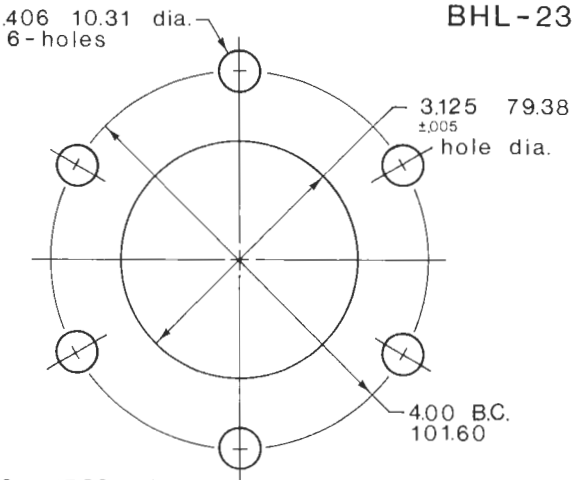


7.00 177.80 min. pulley dia.
14 ga. or 13 ga.

BHL-23A

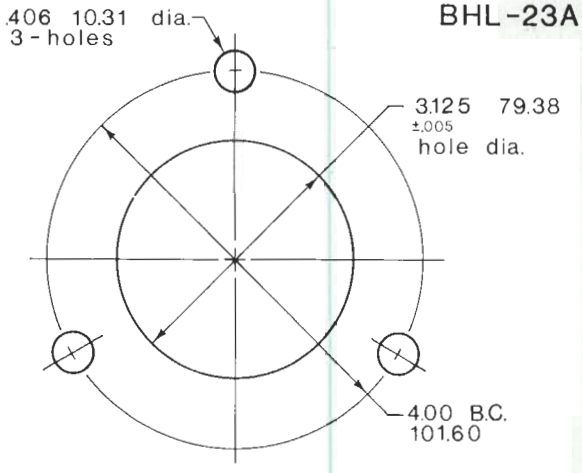


7.00 177.80 min. pulley dia.
14 ga. or 13 ga.

BHL-24

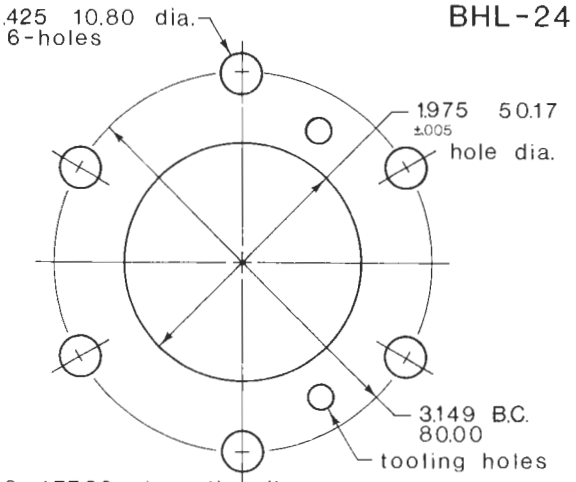

7.00 177.80 min. pulley dia.
14 ga. or 13 ga.

BHL-24A

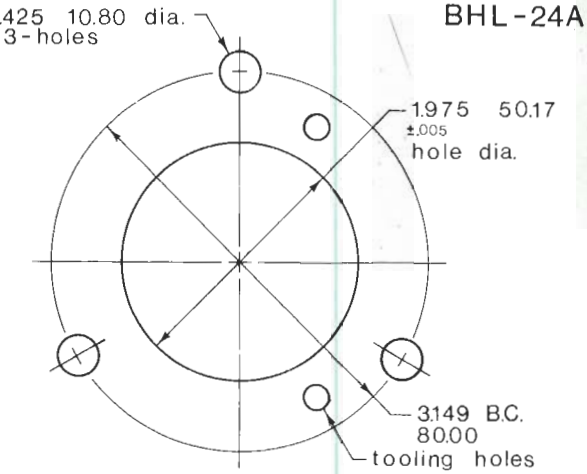


7.00 min. pulley dia.
14 ga. or 13 ga.

1985

GENERAL SPECIFICATIONS OF IDLER PULLEY UNITS

SINGLE ROW BEARINGS

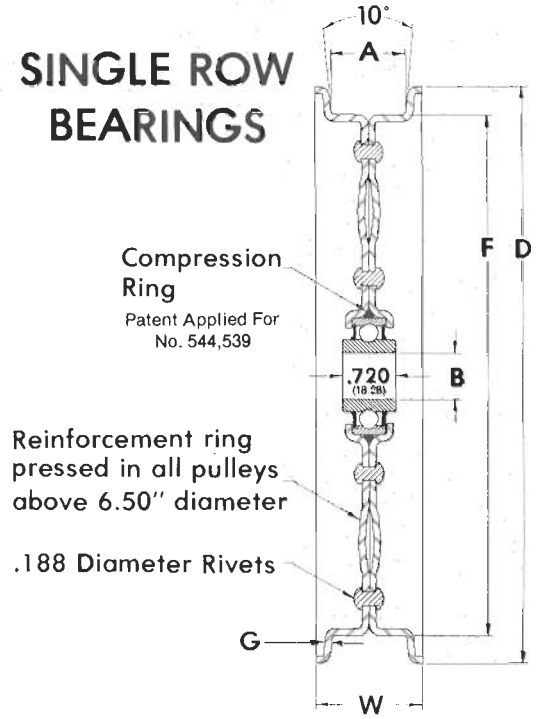

FLAT IDLERS

Pulley Part No.	A Face Width	B Bore	D Outside Diam.	W Pulley Width	F Face Diam.	Rows Of Rivets	No. Of Rivets	G Ga. Mat.	Wt.
G2ABFI-64	.75	.510	4.00	1.12	3.38	1	6	14	.83
	19.05	12.95	101.60	28.44	85.85	1	6	14	.38
G4ABFI-64	.75	.635	4.00	1.12	3.38	1	6	14	.83
	19.05	16.13	101.60	28.44	85.85	1	6	14	.38
G2ABFI-76	.75	.510	4.75	1.12	4.00	2	18	14	1.09
	19.05	12.95	120.65	28.44	101.60	2	18	14	.49
G4ABFI-76	.75	.635	4.75	1.12	4.00	2	18	14	1.09
	19.05	16.13	120.65	28.44	101.60	2	18	14	.49
G2BCFI-76	1.00	.510	4.75	1.43	4.00	2	18	14	1.14
	25.40	12.95	120.65	36.51	101.60	2	18	14	.52
G4BCFI-76	1.00	.635	4.75	1.43	4.00	2	18	14	1.14
	25.40	16.13	120.65	36.51	101.60	2	18	14	.52
G2BCFI-92	1.00	.510	5.75	1.43	5.00	2	18	14	1.55
	25.40	12.95	146.05	36.51	127.00	2	18	14	.70
G4BCFI-92	1.00	.635	5.75	1.43	5.00	2	18	14	1.55
	25.40	16.13	146.05	36.51	127.00	2	18	14	.70
G2FPB2A-92	1.31	.510	5.75	1.75	5.00	2	18	14	1.70
	33.27	12.95	146.05	44.45	127.00	2	18	14	.77
G4FPB2A-92	1.31	.635	5.75	1.75	5.00	2	18	14	1.70
	33.27	16.13	146.05	44.45	127.00	2	18	14	.77
G226FI-92	1.62	.510	5.75	2.06	5.00	2	18	14	1.75
	41.14	12.95	146.05	52.39	127.00	2	18	14	.79
G426FI-92	1.62	.635	5.75	2.06	5.00	2	18	14	1.75
	41.14	16.13	146.05	52.39	127.00	2	18	14	.79
G232FI-92	2.00	.510	5.75	2.43	5.00	2	18	14	1.85
	50.80	12.95	146.05	61.91	127.00	2	18	14	.84
G432FI-92	2.00	.635	5.75	2.43	5.00	2	18	14	1.85
	50.80	16.13	146.05	61.91	127.00	2	18	14	.84
G2ABFI-100	.75	.510	6.25	1.18	5.50	2	18	14	1.68
	19.05	12.95	158.75	30.16	139.70	2	18	14	.76
G4ABFI-100	.75	.635	6.25	1.18	5.50	2	18	14	1.68
	19.05	16.13	158.75	30.16	139.70	2	18	14	.76
G2BCFI-100	1.00	.510	6.25	1.43	5.50	2	18	14	1.75
	25.40	12.95	158.75	36.51	139.70	2	18	14	.79
G4BCFI-100	1.00	.635	6.25	1.43	5.50	2	18	14	1.75
	25.40	16.13	158.75	36.51	139.70	2	18	14	.79

Pulley Part No.	A Face Width	B Bore	D Outside Diam.	W Pulley Width	F Face Diam.	Rows Of Rivets	No. Of Rivets	G Ga. Mat.	Wt.
*G224FFI-104	1.50	.510	6.50	1.50	6.50	2	18	14	2.125
	38.10	12.95	165.1	38.10	165.1	2	18	14	.963
*G424FFI-104	1.50	.635	6.50	1.50	6.50	2	18	14	2.125
	38.10	16.13	165.1	38.10	165.1	2	18	14	.963
G2ABFI-108	.75	.510	6.75	1.18	6.00	2	18	14	1.91
	19.05	12.95	171.45	30.16	152.40	2	18	14	.87
G4ABFI-108	.75	.635	6.75	1.18	6.00	2	18	14	1.91
	19.05	16.13	171.45	30.16	152.40	2	18	14	.87
G2BCFI-108	1.00	.510	6.75	1.43	6.00	2	18	14	1.97
	25.40	12.95	171.45	36.51	152.40	2	18	14	.89
G4BCFI-108	1.00	.635	6.75	1.43	6.00	2	18	14	1.97
	25.40	16.13	171.45	36.51	152.40	2	18	14	.89
G226FI-108	1.62	.510	6.75	2.06	6.00	2	18	14	2.19
	41.28	12.95	171.45	52.39	152.40	2	18	14	.99
G426FI-108	1.62	.635	6.75	2.06	6.00	2	18	14	2.19
	41.28	16.13	171.45	52.39	152.40	2	18	14	.99
G2BCFI-124	1.00	.510	7.75	1.43	7.00	2	18	14	2.46
	25.40	12.95	196.85	36.51	177.80	2	18	14	1.12
G4BCFI-124	1.00	.635	7.75	1.43	7.00	2	18	14	2.46
	25.40	16.13	196.85	36.51	177.80	2	18	14	1.12
G2BCFI-140	1.00	.510	8.75	1.43	8.00	2	18	14	3.01
	25.40	12.95	222.25	36.51	203.20	2	18	14	1.37
G4BCFI-140	1.00	.635	8.75	1.43	8.00	2	18	14	3.01
	25.40	16.13	222.25	36.51	203.20	2	18	14	1.37
G2DFI-144	1.50	.510	9.00	1.93	8.00	2	18	14	3.36
	38.10	12.95	228.60	49.21	203.20	2	18	14	1.52
G4DFI-144	1.50	.635	9.00	1.93	8.00	2	18	14	3.36
	38.10	16.13	228.60	49.21	203.20	2	18	14	1.52
G232FI-144	2.00	.510	9.00	2.43	8.00	2	18	14	3.56
	50.80	12.95	228.60	61.91	203.20	2	18	14	1.61
G432FI-144	2.00	.635	9.00	2.43	8.00	2	18	14	3.56
	50.80	16.13	228.60	61.91	203.20	2	18	14	1.61
G2DFI-176	1.50	.510	11.00	1.93	10.00	2	18	14	4.71
	38.10	12.95	279.40	49.31	254	2	18	14	4.71
G4DFI-176	1.50	.635	11.00	1.93	10.00	2	18	14	2.14
	38.10	16.13	279.40	49.21	254	2	18	14	2.14

*Flat Face, No Flange

1984

Inch Dimensions
Metric Dimensions

STAMPED BOLT HOLES AND CENTER HOLE LAYOUTS (BHL)


(Designed for bolting to customers hubs)

Minimum pulley diameter and material gauge of pulley is shown in each block.

New designs added, at no cost to the customer, if quantities warrant.


(Unless otherwise specified tolerances are ±.005) metric

BHL-27

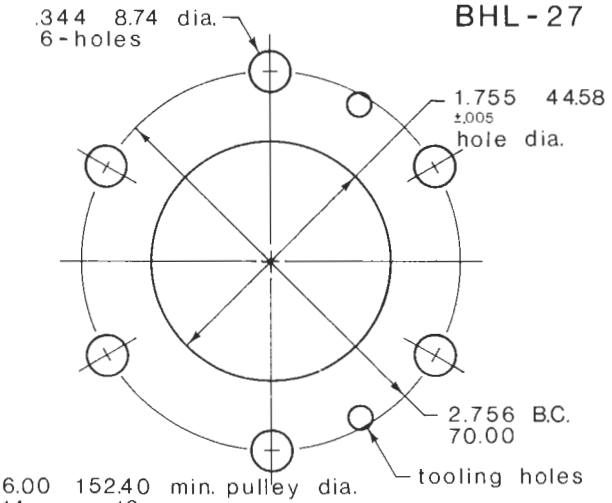


6.00 152.40 min. pulley dia.
14 ga. or 13 ga.

BHL-27A

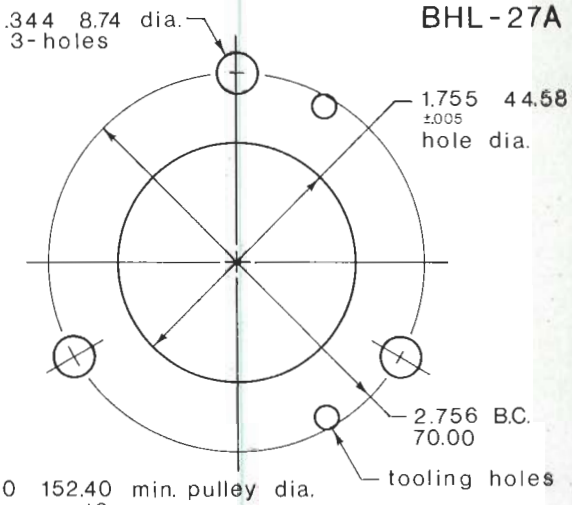


6.00 152.40 min. pulley dia.
14 ga. or 13 ga.

BHL-29

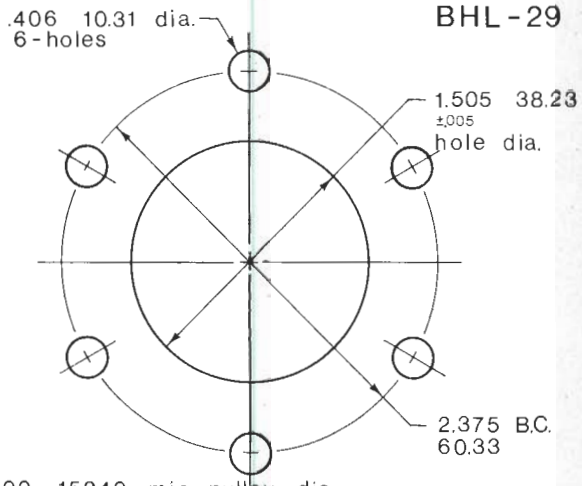


6.00 152.40 min. pulley dia.
14 ga. or 13 ga.

BHL-29A

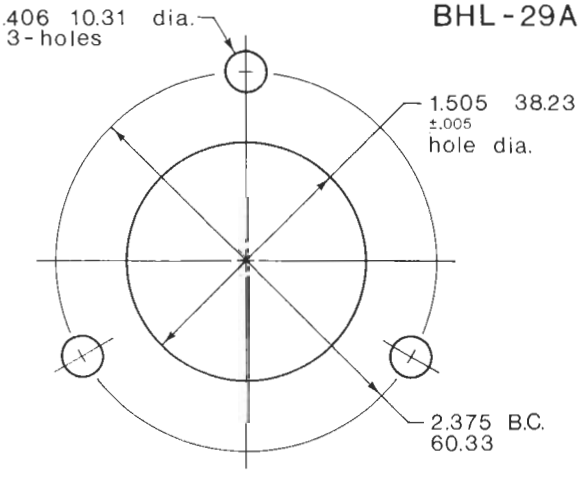

6.00 152.40 min. pulley dia.
14ga. or 13ga.

BHL-30

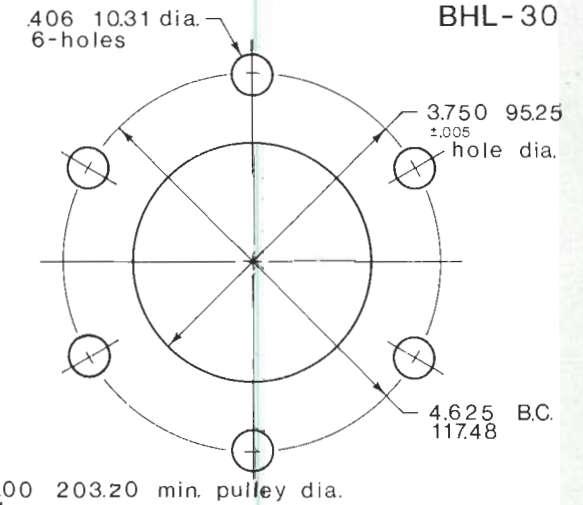

8.00 203.20 min. pulley dia.
11 ga.

1985

STAMPED BOLT HOLES AND CENTER HOLE LAYOUTS (BHL)


(Designed for bolting to customers hubs)

Minimum pulley diameter and material gauge of pulley is shown in each block.

New designs added, at no cost to the customer, if quantities warrant.


(Unless otherwise specified tolerances are ± .005) metric

BHL-30A

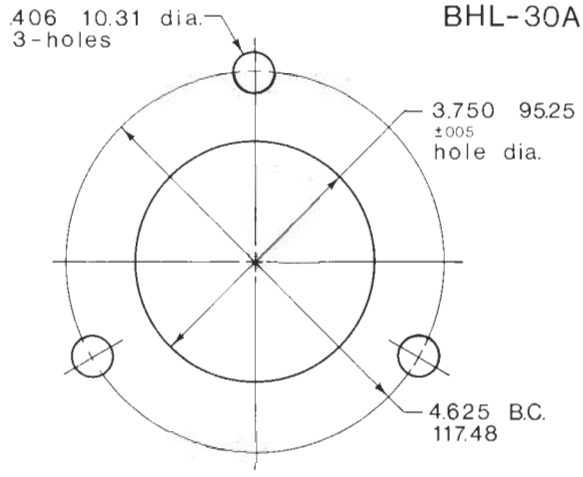


8.00 203.20 min. pulley dia.
11 ga.

BHL-31

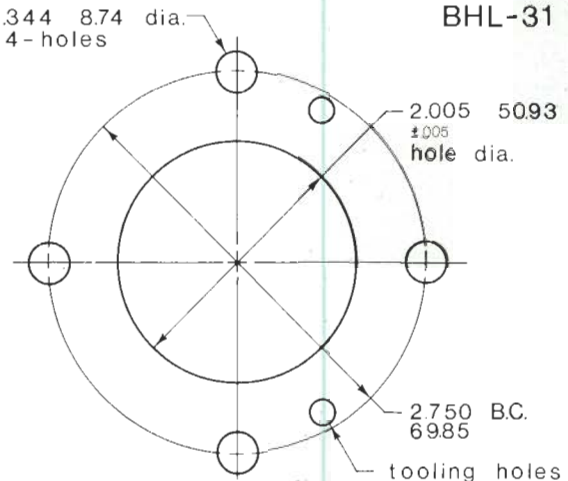


6.00 152.40 min. pulley dia.
14 ga. or 13 ga.

BHL-34

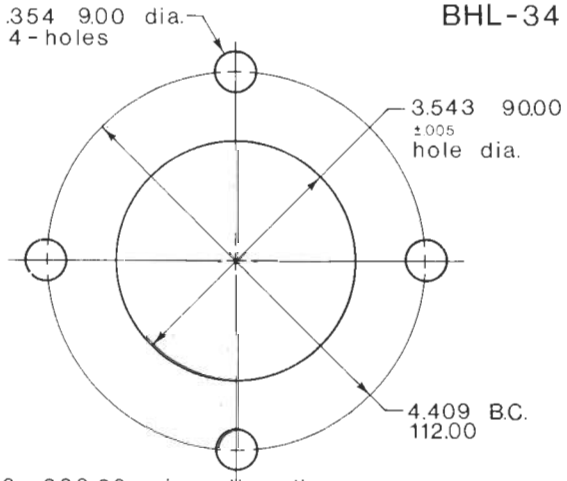


8.00 203.20 min. pulley dia.
14 ga. or 13 ga.

BHL-35

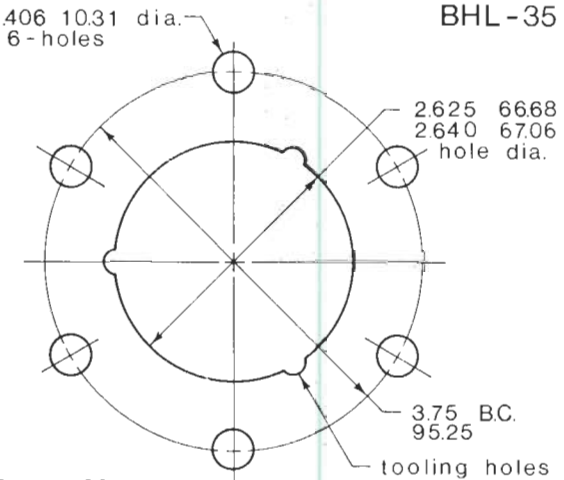

7.00 177.80 min. pulley dia.
14 ga. or 13 ga.

BHL-35A

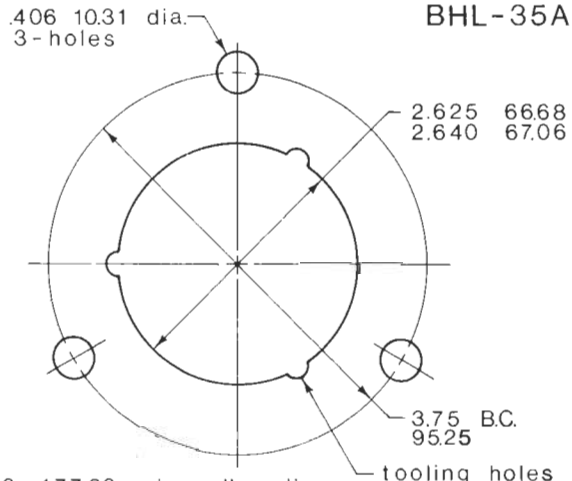

7.00 177.80 min. pulley dia.
14 ga. or 13 ga.

1985

STAMPED BOLT HOLES AND CENTER HOLE LAYOUTS (BHL)


(Designed for bolting to customers hubs)

Minimum pulley diameter and material gauge of pulley is shown in each block.

New designs added, at no cost to the customer, if quantities warrant.


(Unless otherwise specified tolerances are ±.005) metric

BHL-40

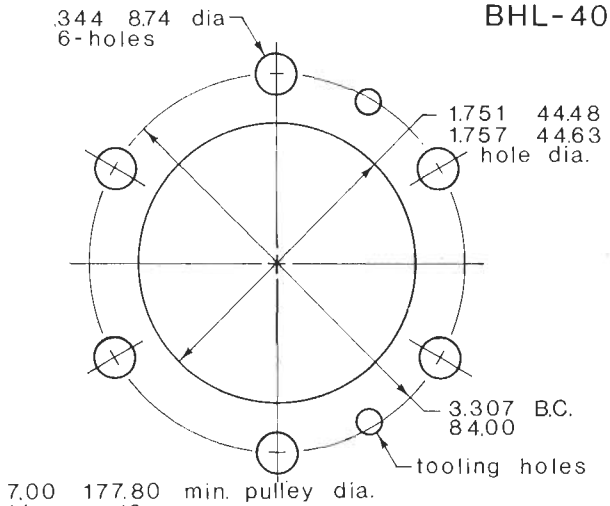

7.00 177.80 min. pulley dia.
14ga. or 13ga.

BHL-40A

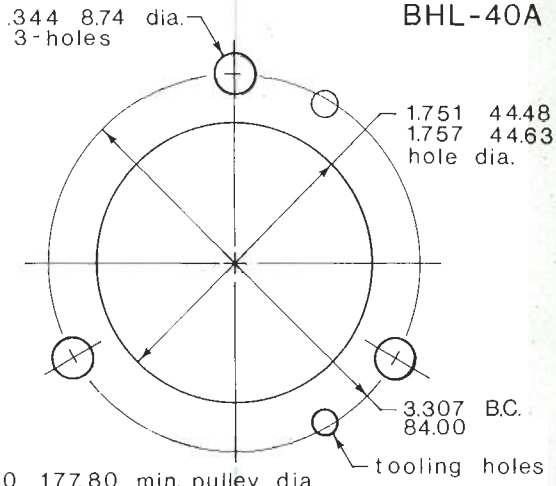

7.00 177.80 min. pulley dia.
14ga. or 13ga.

1985



P.O. Box 107/Kingman, Kansas 67068
Phone 316-532-3131