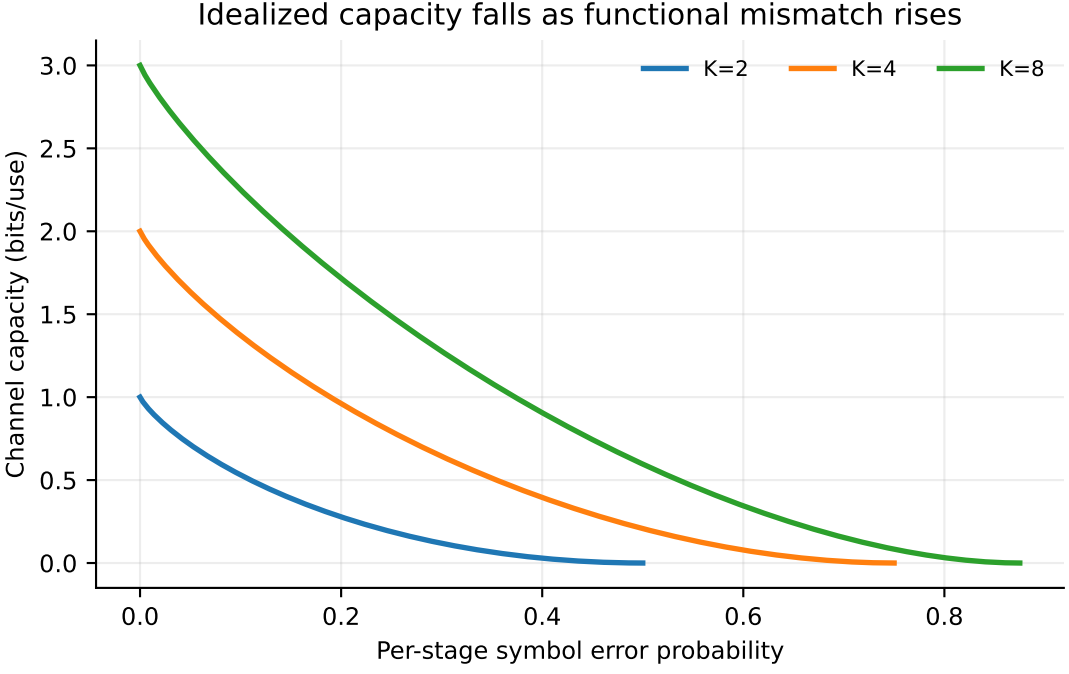
Idealized capacity falls as functional mismatch rises
K=2
K=4
K=8
Channel capacity (bits/use)
3.0
2.5
2.0
1.5
1.0
0.5
0.0
0.0
0.2
0.4
0.6
0.8
Per-stage symbol error probability