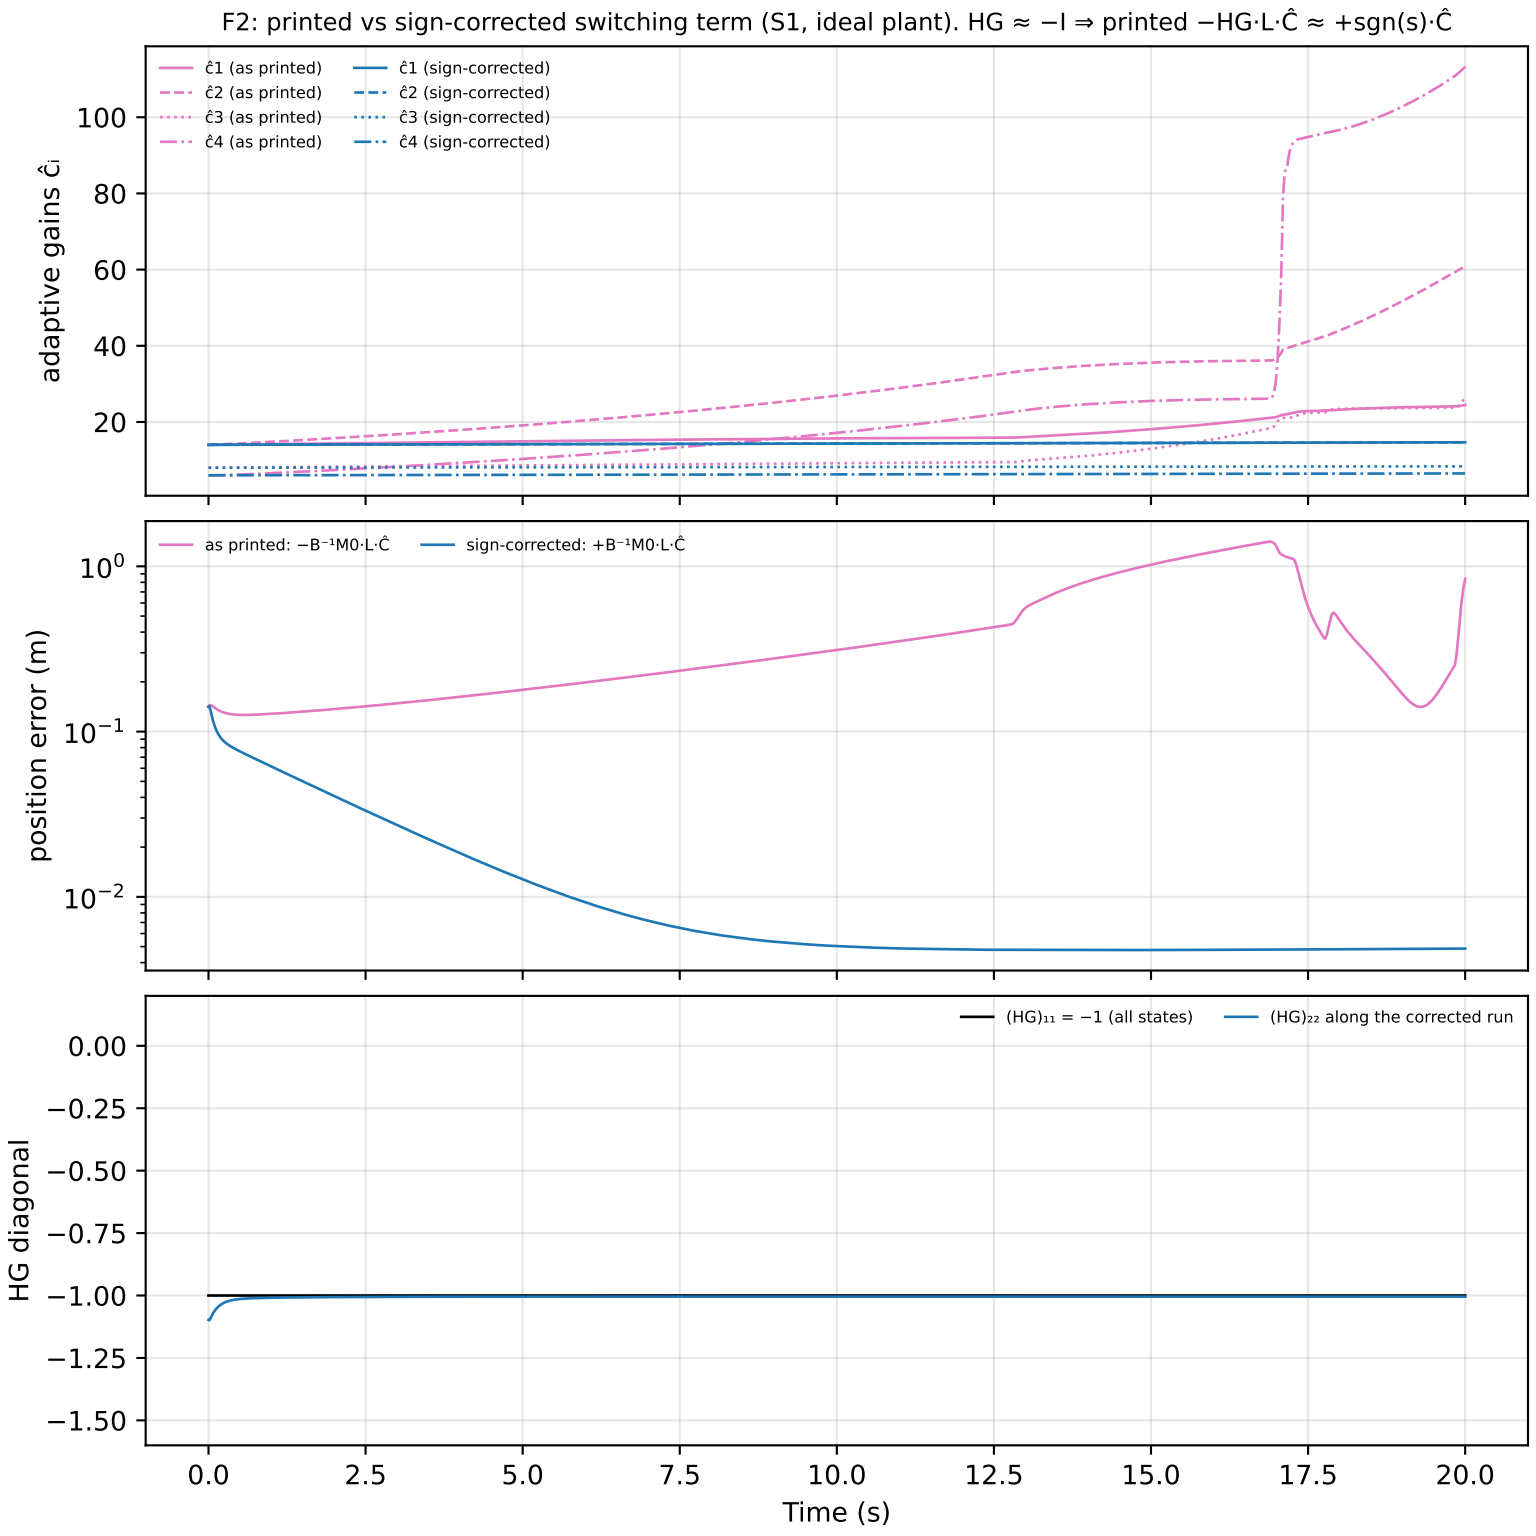
F2: printed vs sign-corrected switching term (S1, ideal plant). HG ≈ −I ⇒ printed −HG·L·Ĉ ≈ +sgn(s)·Ĉ
ĉ1 (as printed)
ĉ2 (as printed)
ĉ3 (as printed)
ĉ4 (as printed)
ĉ1 (sign-corrected)
ĉ2 (sign-corrected)
ĉ3 (sign-corrected)
ĉ4 (sign-corrected)
adaptive gains ĉᵢ
100
80
60
40
20
as printed: −B⁻¹M0·L·Ĉ
sign-corrected: +B⁻¹M0·L·Ĉ
position error (m)
10⁰
10⁻¹
10⁻²
(HG)₁₁ = −1 (all states)
(HG)₂₂ along the corrected run
HG diagonal
0.00
−0.25
−0.50
−0.75
−1.00
−1.25
−1.50
0.0
2.5
5.0
7.5
10.0
12.5
15.0
17.5
20.0
Time (s)