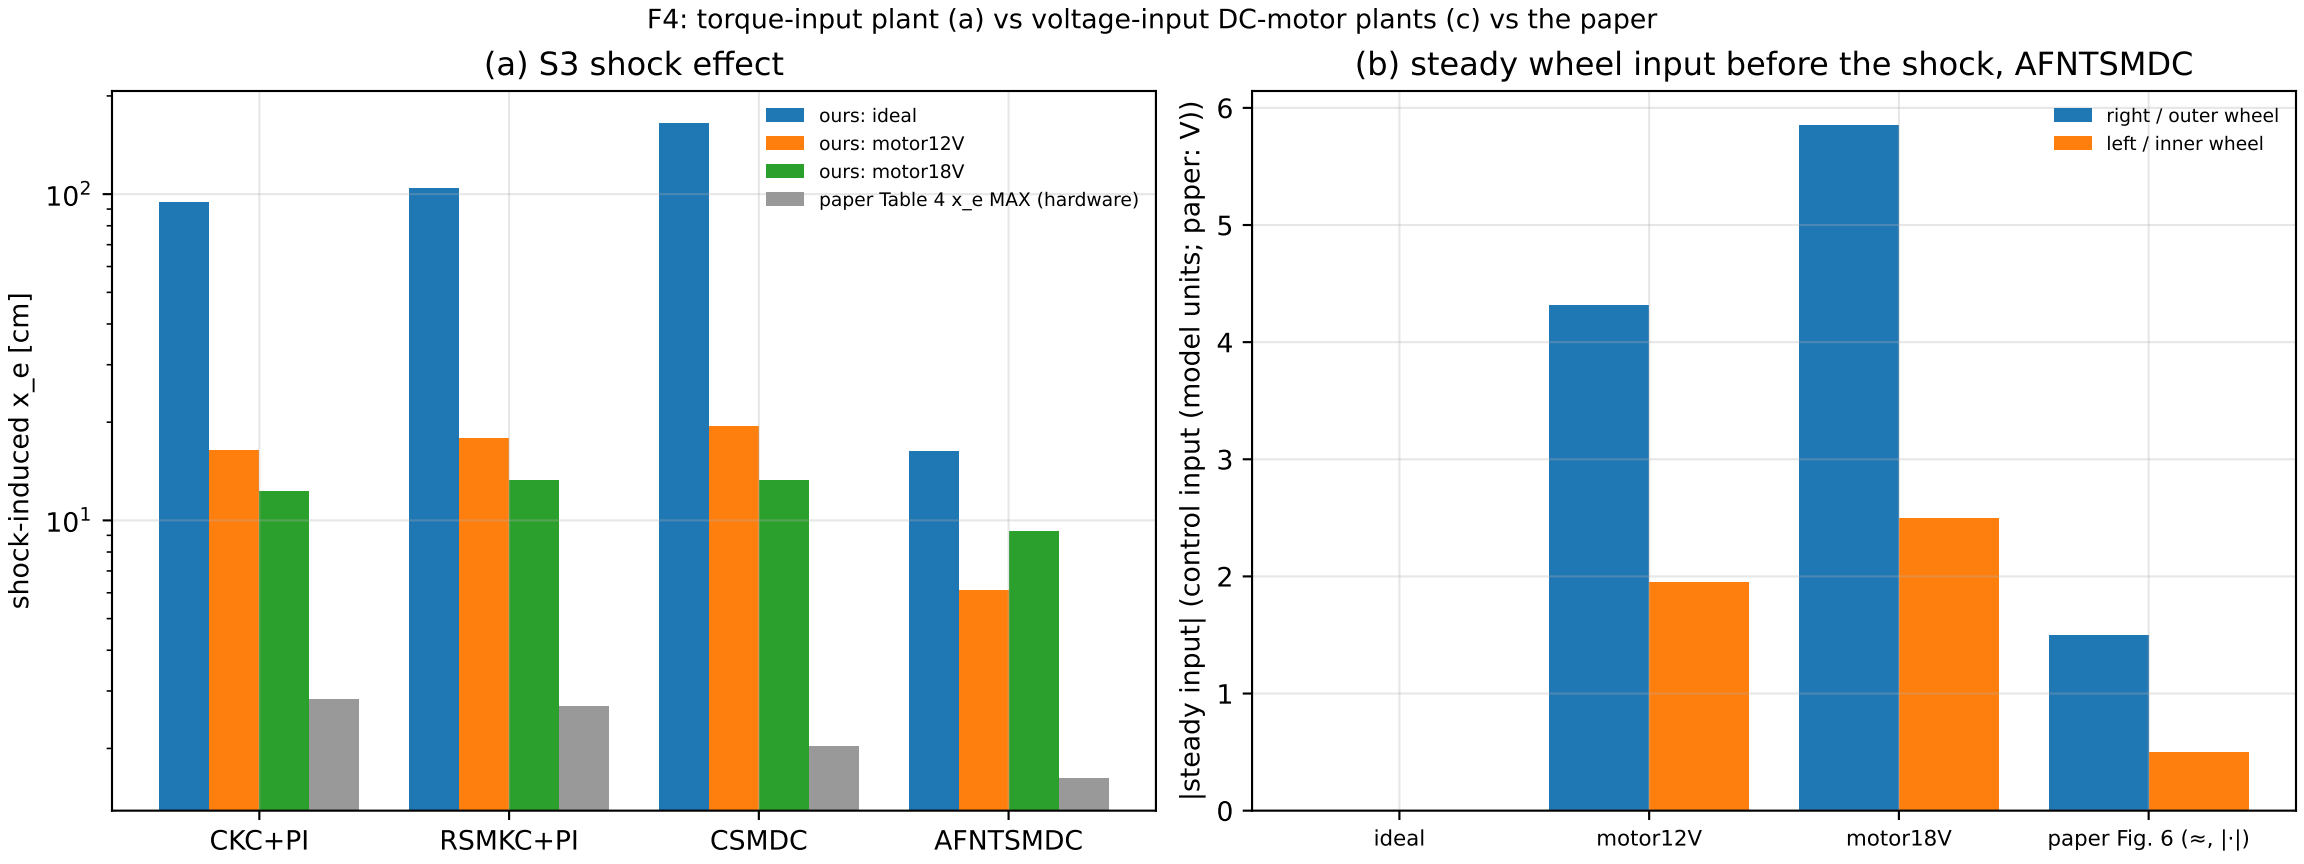
F4: torque-input plant (a) vs voltage-input DC-motor plants (c) vs the paper
(a) S3 shock effect
shock-induced x_e [cm]
10^2
10^1
ours: ideal
ours: motor12V
ours: motor18V
paper Table 4 x_e MAX (hardware)
CKC+PI
RSMKC+PI
CSMDC
AFNTSMDC
(b) steady wheel input before the shock, AFNTSMDC
|steady input| (control input (model units; paper: V))
0
1
2
3
4
5
6
right / outer wheel
left / inner wheel
ideal
motor12V
motor18V
paper Fig. 6 (≈, |·|)