



EUROLUBE EQUIPMENT AB

OUR MEDIUM SIZED PUMPS ARE NOW UPGRADED WITH OUR UNIQUE AIR MOTOR, WITH THE FOLLOWING FEATURES FOR OUR CUSTOMERS:

- OUTSTANDING RELIABILITY AND PERFORMANCE
- LOWER AIR CONSUMPTION
- LOWER NOISE LEVEL

AIR OPERATED PUMPS

DEVELOPED AND MANUFACTURED BY EUROLUBE EQUIPMENT AB

1:1 TRANSFER PUMPS AND EXTRACTION PUMPS FOR OIL AND DIESEL



Eurolube 1:1 pumps are ideal for transferring large volume of fluids from pails, drums, tanks and IBC containers. The pumps are designed to deliver motor oils, cutting oils, hydraulic oils, coolants, and a wide range of petroleum based fluids.

- All pumps are quiet and use double-action positive displacement for uniform flow.
- A11740-41 includes 2" drum adapter, seals in NBR and PU.
- B11745 is a unique extraction pump with outstanding performance - up to 95% vacuum.
- The ideal solution to extract oil & diesel within -automotive - industry -marine, for fast and clean oil change.
- Seals in PTFE and Viton.
- Warning! Do not use with inflammable fluids.

	PART NO	RATIO	AIR INLET	FLUID INLET	FLUID OUTLET	CAPACITY
1	A11740	1:1	1/4" BSP (F)	–	3/4" BSP (F)	40l/min
2	A11741	1:1	1/4" BSP (F)	1" BSP (F)	3/4" BSP (F)	40l/min
3	B11745	1:1	1/4" BSP (F)	1" BSP (F)	3/4" BSP (F)	15l/min

3:1 MEDIUM PRESSURE OIL PUMPS



Eurolube 3:1 pumps are designed to dispense lubricating oils and similar products up to SAE 90 in piped systems. Models A13760-62 are recommended for simultaneous use up to 3 outlets. Models 13765-66 are recommended if more than 3 outlets are in use simultaneously. The pumps can deliver motor oils, gear oils, cutting oils, hydraulic oils, machine coolants, automatic transmission fluids and a wide range of petroleum-based fluids from pails, drums, tanks and IBC containers.

- All pumps are quiet and use double-action positive displacement for uniform flow.
- 2" drum adapter included in all models. Seals in NBR and PU.
- Warning! Do not use with inflammable fluids.

	PART NO	RATIO	AIR INLET	FLUID INLET	FLUID OUTLET	CAPACITY
1	A13760	3:1	1/4" BSP (F)	–	3/4" BSP (F)	25l/min
2	A13762	3:1	1/4" BSP (F)	–	3/4" BSP (F)	25l/min
3	A13761	3:1	1/4" BSP (F)	1" BSP (F)	3/4" BSP (F)	25l/min
4	13765	3:1	3/8" BSP (F)	–	1" BSP (F)	40l/min
5	13766	3:1	3/8" BSP (F)	1" BSP (F)	1" BSP (F)	40l/min

5:1 MEDIUM PRESSURE OIL PUMPS



Eurolube 5:1 pumps are designed to dispense lubricating oils and similar products up to SAE 140 in piped systems. Models B15780-82 are recommended for simultaneous use up to 3 outlets. Models 15770-71 are recommended if more than 3 outlets are in use simultaneously. The pumps can deliver motor oils, gear oils, cutting oils, hydraulic oils, machine coolants, automatic transmission fluids and a wide range of petroleum-based fluids from pails, drums, tanks and IBC containers.

- All pumps are quiet and use double-action positive displacement for uniform flow.
- 2" drum adapter included in all models. Seals in NBR and PU.
- The 5:1 pumps can also be used as transfer / filler pumps for grease up to NGLI2.
- Warning! Do not use with inflammable fluids.

	PART NO	RATIO	AIR INLET	FLUID INLET	FLUID OUTLET	CAPACITY
1	B15780	5:1	1/4" BSP (F)	–	3/4" BSP (F)	22l/min
2	B15782	5:1	1/4" BSP (F)	–	3/4" BSP (F)	22l/min
3	B15781	5:1	1/4" BSP (F)	3/4" BSP (F)	3/4" BSP (F)	22l/min
4	15770	5:1	3/8" BSP (F)	–	1" BSP (F)	35l/min
5	15771	5:1	3/8" BSP (F)	1" BSP (F)	1" BSP (F)	35l/min

AIR OPERATED PUMPS

DEVELOPED AND MANUFACTURED BY EUROLUBE EQUIPMENT AB

50:1 & 25:1 GREASE PUMPS



Eurolube grease pumps are designed to handle a wide range of grease up to NLGI3. Combined with other Eurolube products such as hose reels, dispensing valves and automatic lubrication devices, Eurolube grease pumps can deliver lubricants from drums and kegs.

- Micro-lapped hardened high pressure pistons, to assure years of operation.
- Seals made of PTFE and NBR.
- Ideal for use in mobile greasers or piped installations.
- The 25:1 models are suitable for transfer of grease up to NLGI2, free delivery up to 2,5kg/min.

	PART NO	RATIO	AIR INLET	DRUM	GREASE OUTLET	CAPACITY
1	25780	50:1	1/4" BSP (F)	180kg	3/8" BSP (F)	0,7kg/min
2	25781	50:1	1/4" BSP (F)	50kg	3/8" BSP (F)	0,7kg/min
3	25782	50:1	1/4" BSP (F)	20kg	3/8" BSP (F)	0,7kg/min
4	25783	50:1	1/4" BSP (F)	12-15kg	3/8" BSP (F)	0,7kg/min
1	25790	25:1	1/4" BSP (F)	180kg	3/8" BSP (F)	2,5kg/min
2	25791	25:1	1/4" BSP (F)	50kg	3/8" BSP (F)	2,5kg/min
3	25792	25:1	1/4" BSP (F)	20kg	3/8" BSP (F)	2,5kg/min

2:1 STAINLESS STEEL PUMPS AND MIXING PUMPS



Eurolube multi-fluids pumps are designed to provide the capabilities and versatility needed to mix fluids and transfer to the point of application, dispensed or sprayed. The fluids are pumped from their original containers or bulk storage tanks.

Our unique mixing pump is the best solution on the market when there is a need for mixing a fluid with water, such as windscreen fluid, anti freeze etc.

- Example of Fluids: Detergents, cleaning fluids, synthetic hydraulic oil, antifreeze, windshield fluids, solvents, sealants or other corrosive fluids, etc, compatible with AISI 316, PTFE and Viton.

- Warning! Do not use with inflammable fluids.

	PART NO	RATIO	AIR INLET	FLUID INLET	FLUID OUTLET	CAPACITY
1	A12715	2:1	1/4" BSP (F)	-	3/4" BSP (M)	30l/min
2	A12716	2:1	1/4" BSP (F)	1" BSP (F)	3/4" BSP (M)	30l/min
3	A117-20	50/50	1/4" BSP (F)	3/4" BSP (F)	1/2" BSP (M)	15l/min
4	A117-25	70/30	1/4" BSP (F)	3/4" BSP (F)	1/2" BSP (M)	15l/min

25:1 UNDERCOATING/RUSTPROOFING PUMPS



Eurolube undercoating pumps are designed for airless spraying of rust preventives. Three models available to fit any drum from 20 litre up to 200 litre drums. Materials may be sprayed using air-atomizing or airless spray systems. Applications include the spraying of adhesives, roof coatings and hundreds of similar applications.

- Micro-lapped hardened high pressure pistons, to assure years of operation.
- Seals made of PTFE and NBR.
- Warning! Do not use with inflammable fluids.

	PART NO	RATIO	AIR INLET	DRUM	OUTLET	CAPACITY
1	15790	25:1	1/4" BSP (F)	180kg	3/8" BSP (F)	2,5kg/min
2	15791	25:1	1/4" BSP (F)	50kg	3/8" BSP (F)	2,5kg/min
3	15792	25:1	1/4" BSP (F)	20kg	3/8" BSP (F)	2,5kg/min

A SELECTION OF OUR FLUID HANDLING EQUIPMENT


Eurolube's Dosing Controller allows batch filling of many fluids and oils.

Ideal for automatic filling of engines, cranks, kegs and drums etc.

Dosing Controller Oil
PART NO 530-03

Dosing Controller Grease
PART NO 530-01

Dosing Controller Fluids
PART NO 530-02

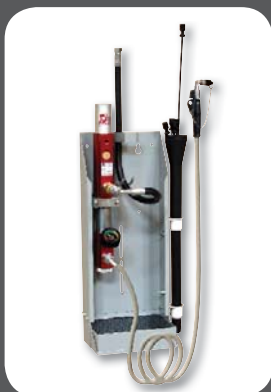

Eurolube's extraction pump for oil and diesel.

The ideal solution for:

- Automotive - For fast and clean oil change
- Industry - For draining smaller tanks etc
- Marine - To extract oil and diesel

Autovac 55
PART NO 317-55

Autovac 56
PART NO 317-56

Autovac 57
PART NO 317-57




S10 Open hose reel
PART NO 17720

S15 Open hose reel with digital meter
PART NO 317-15

5:1 Wall Pump kit for drum
PART NO 157-06

5:1 Wall Pump kit for Tank
PART NO 157-03

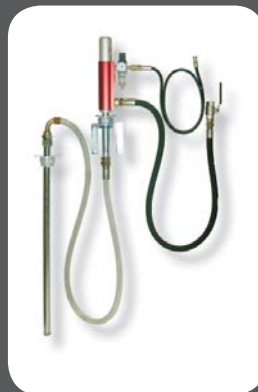

• The heart of any dispensing system is the pump. Eurolube pumps are renowned worldwide for their high quality, easy to use and hassle-free operation.

• Eurolube has a pump to meet almost any fluid handling or dispensing need. Designed and manufactured to meet the highest standards, Eurolube pumps are exactly what you need to keep your operation running.

• We offer a full range of services from simple advice to fully integrated systems tailored to the needs of each customer.

• We provide quality products to partners in more than 30 countries.

EUROLUBE EQUIPMENT AB

Stråsavägen 2, SE-711 76 Storå, Sweden

EMAIL eurolube@eurolube.com PHONE +46 581 836 65 FAX +46 581 409 75