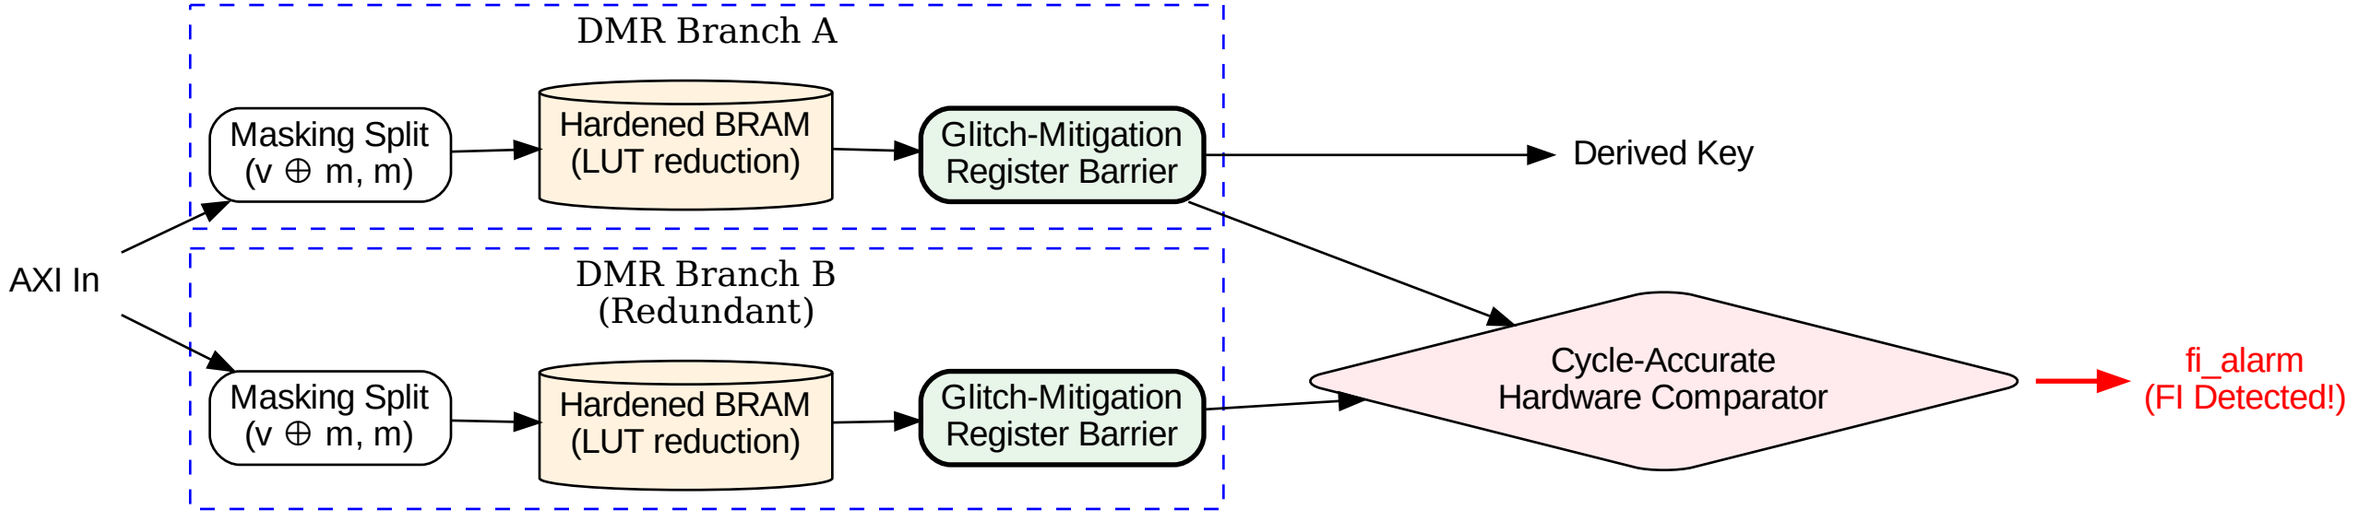
DMR Branch A
Masking Split
(v ⊕ m, m)
Hardened BRAM
(LUT reduction)
Glitch-Mitigation
Register Barrier
Derived Key
AXI In
DMR Branch B
(Redundant)
Masking Split
(v ⊕ m, m)
Hardened BRAM
(LUT reduction)
Glitch-Mitigation
Register Barrier
Cycle-Accurate
Hardware Comparator
fi_alarm
(FI Detected!)