
ISP2454-LX

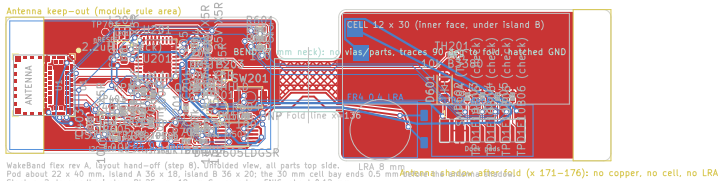

WakeBand flex rev A, layout hand-off (step 8). Unfolded view, all parts top side.
Pod about 22 x 40 mm. Island A 36 x 18, Island B 36 x 20; the 30 mm cell bay ends 0.5 mm above the fold.
Stackup: 2-layer adhesiveless PI 25 um, 18 um Cu, coverlay, ENIG, about 0.12 mm.
Stiffeners on the bottom (User.2): FR4 0.4 under Island A and the LRA pad, PI 0.2 behind the dock pads.
No steel stiffeners. Bend zone (User.3): no vias or parts, R >= 1.2 mm.
Neck 7 mm wide x 8 mm long. Vias only on stiffened areas, >= 0.5 mm from a stiffener edge. Trace/space >= 0.1 mm.
Confirm with JLCPCB which User layers they read for stiffeners before ordering.

FOLD / ASSEMBLY ORIENTATION (fold line x = 136, island B folds UNDER Island A):
- Island A F side (all SMT parts) faces UP, away from the wrist.
- Island B F side faces DOWN to the case floor: dock pads J601 face the dock.
- Cell and LRA mount on Island B's B side (inner face, between the islands):
  cell tabs solder to TP201 (+) / TP202 (-). LRA leads to TP501 (+) / TP502 (-), all on B.Cu;
  LRA tapes onto the FR4 stiffener in the 8 mm motor strip beside the cell.
- All SMT parts are on F (single-sided assembly); B-side pads are hand-soldered after the fold.