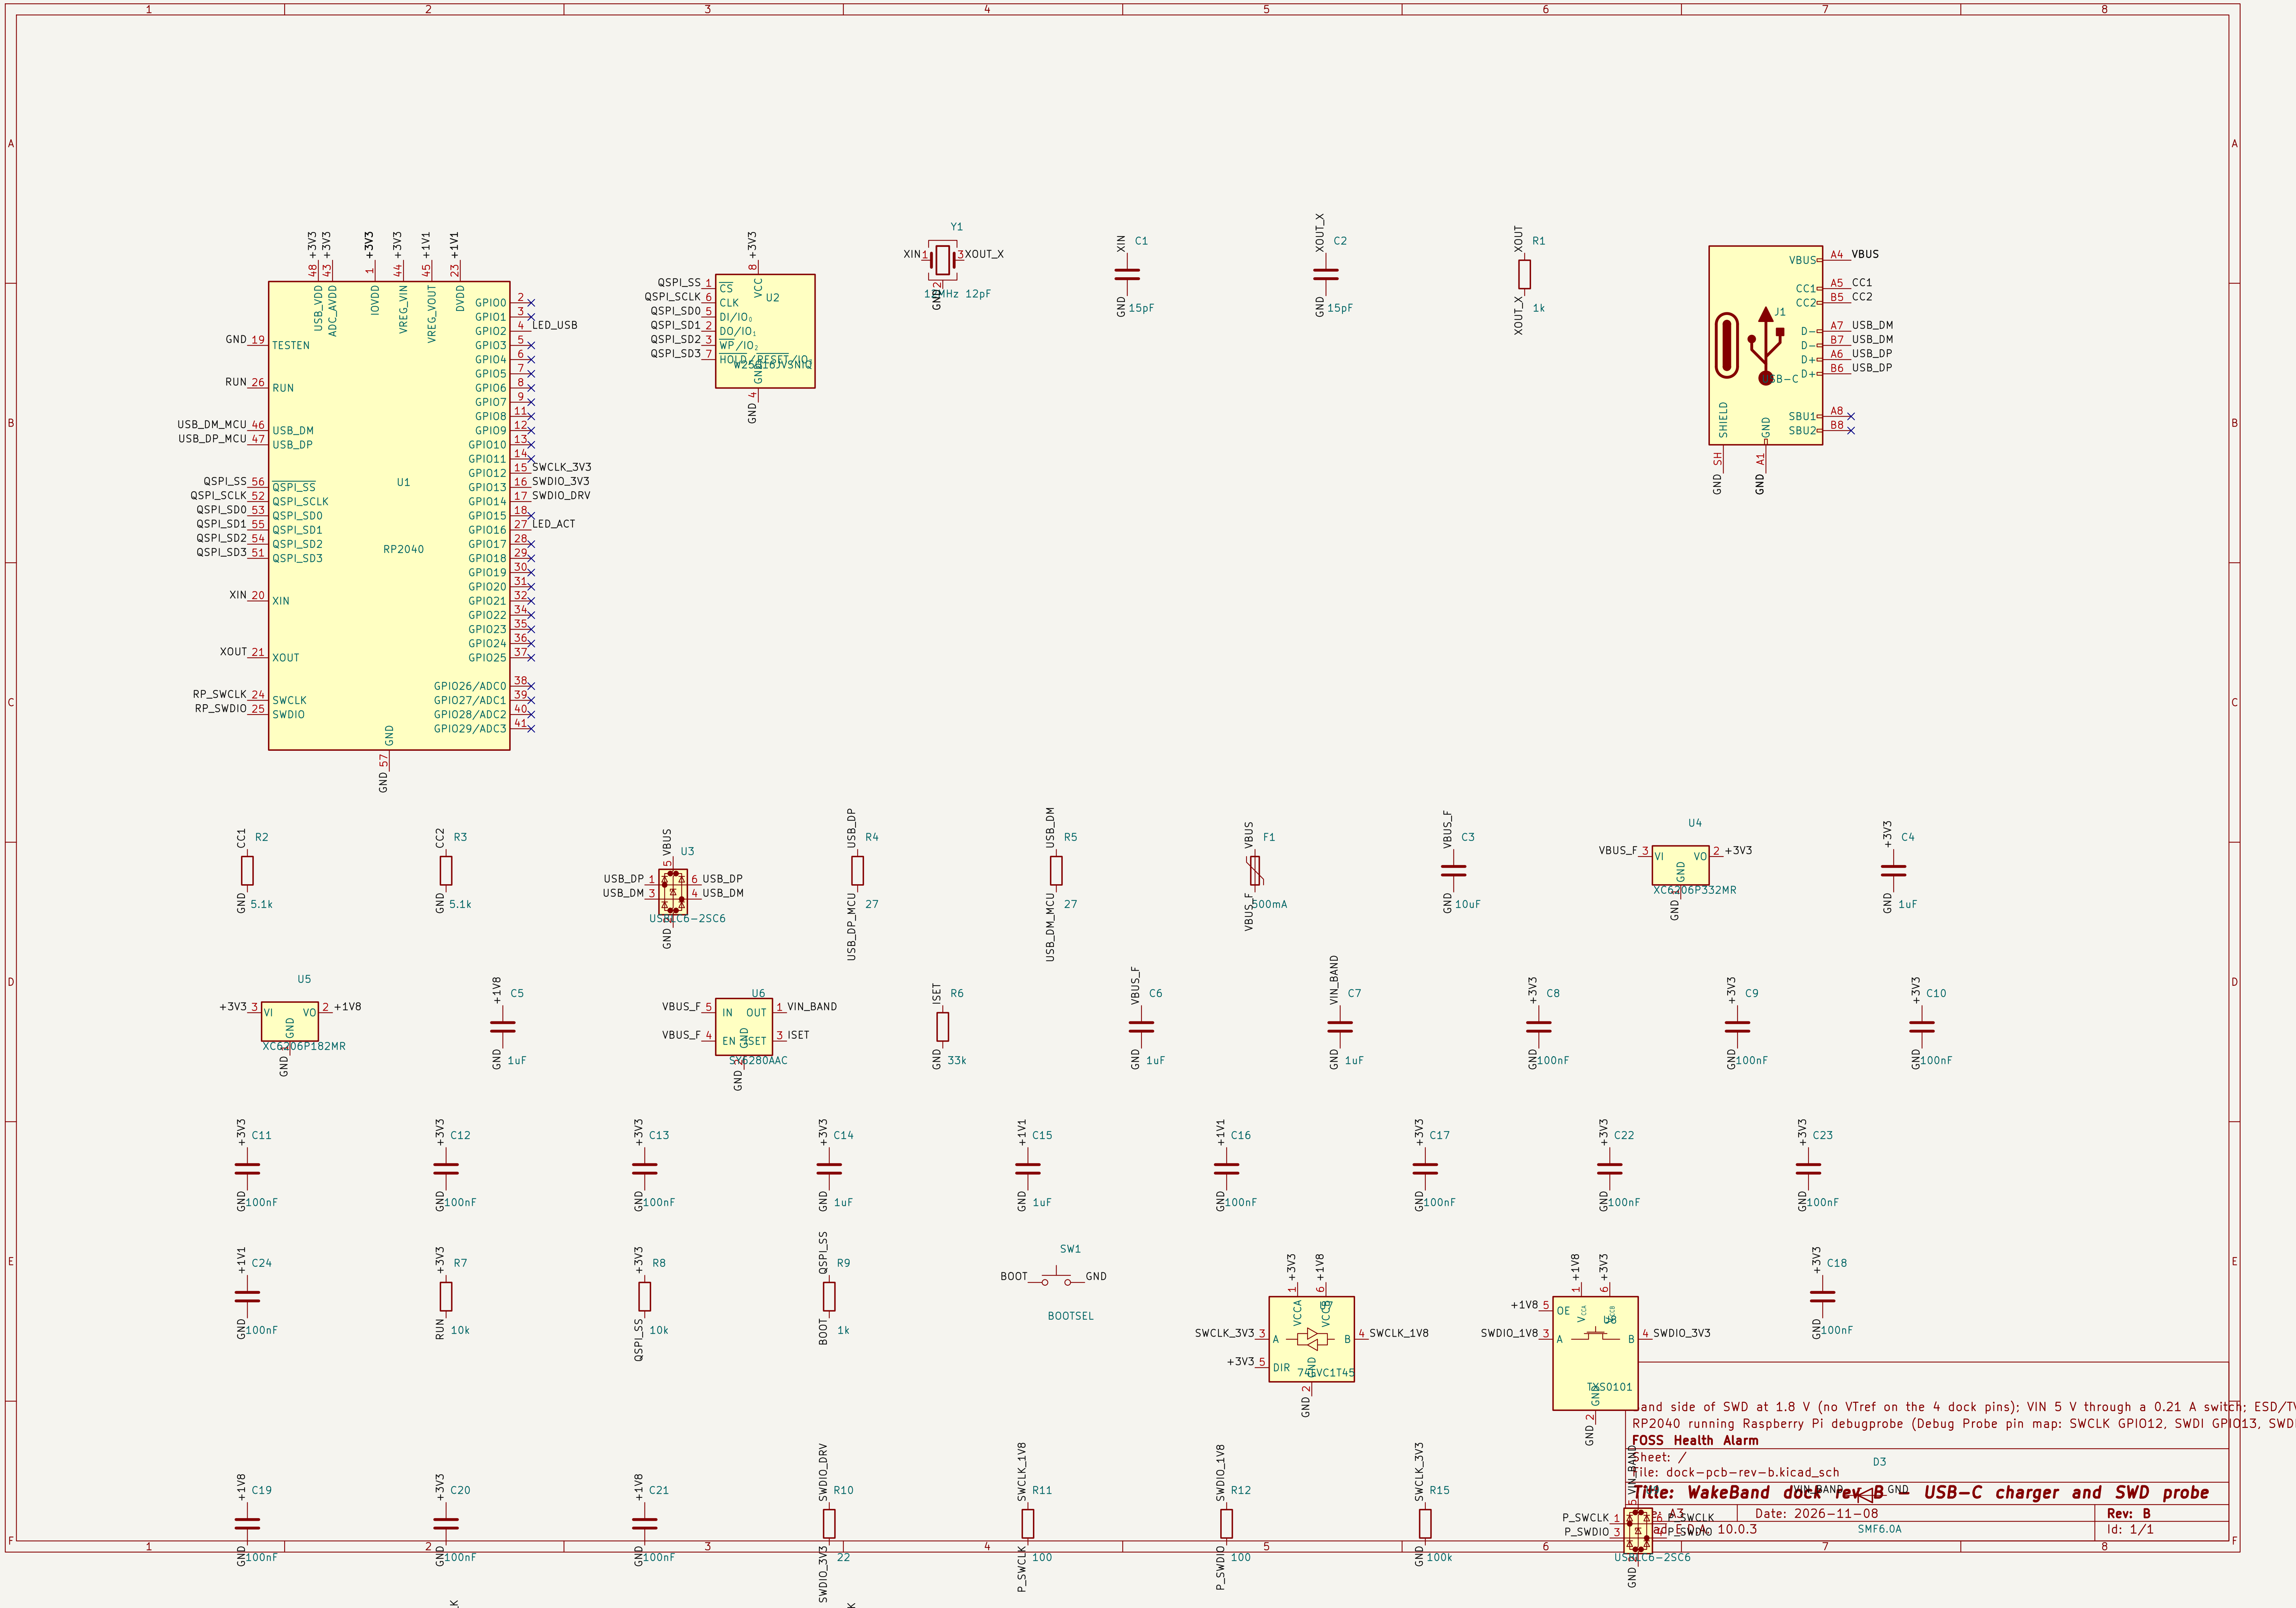

and side of SWD at 1.8 V (no VTref on the 4 dock pins); VIN 5 V through a 0.21 A switch; ESD/TV

RP2040 running Raspberry Pi debugprobe (Debug Probe pin map: SWCLK GPIO12, SWDI GPIO13, SWD

FOSS Health Alarm

Sheet: /
File: dock-pcb-rev-b.kicad_sch

Title: WakeBand dock rev B – USB-C charger and SWD probe

Size: A3	Date: 2026-11-08	**Rev: B**
KiCad E.D.A. 10.0.3		Id: 1/1