

USB-C input: PTC fuse, ESD, CC pull-downs




Charger: BQ25101 at 30 mA, NTC at the cell, charge LED

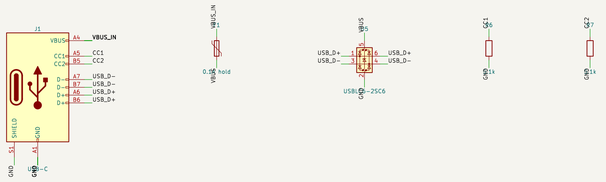


Battery: JST-PH, reverse-polarity FETs, voltage sense

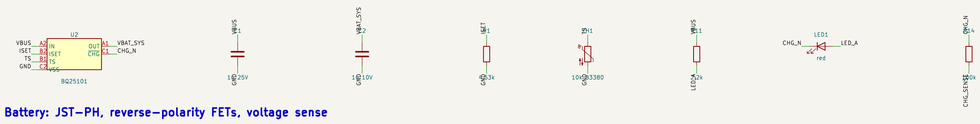

3.0 V LDO, nRF52840 module, button, SWD pads

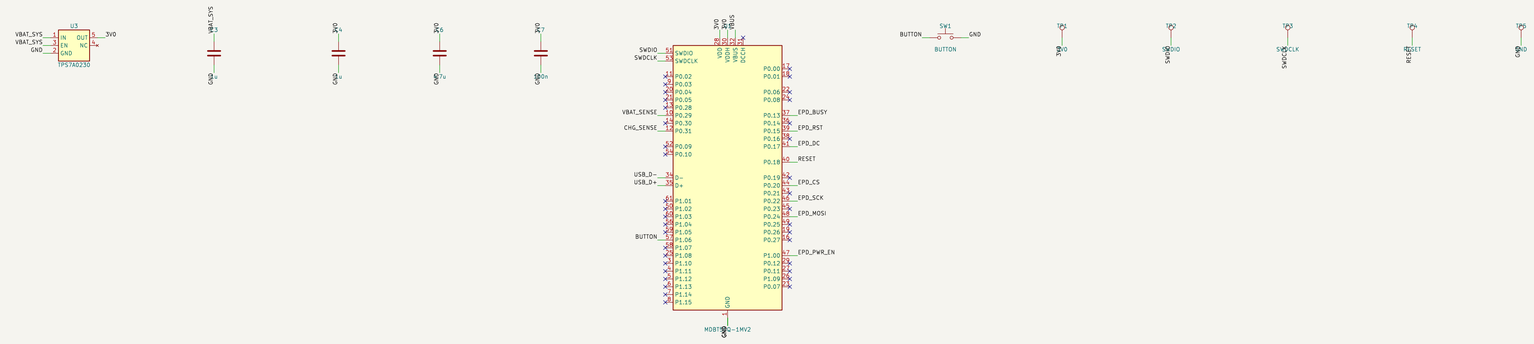

Display GDEH0169E02: power switch, 32-pin FPC, VGH/VGL booster and rail caps (spec figures 7-1, 7-2)

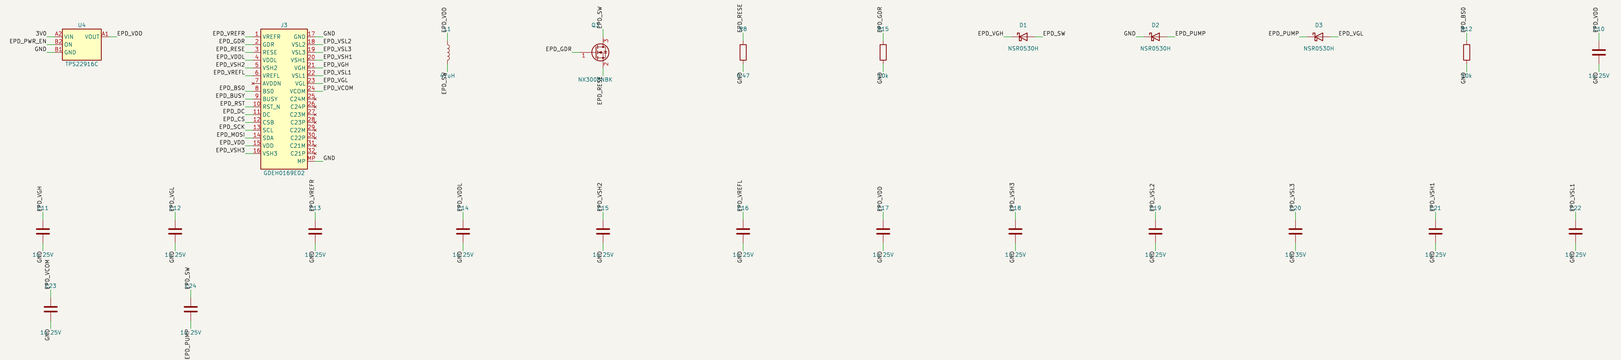

Parts and nets marked VERIFY need checking against datasheets before fab
Generated by hardware/scripts/gen_schematic.py from design.py

Sheet: /
File: open-e-pin.kicad_sch

Title: Open E-Pin main board

Size: A1	Date:	**Rev: 0.1**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1