

A place for the heart.

Amara Nest turns the warmth of ÌTURA's Amara Heart Necklace into a compact companion stud. The asymmetrical gold fold frames a bright heart cut as if it has found a safe place to rest.

DESIGN INTENT

A close-to-the-lobe form for everyday wear, with the heart visible from the front and a soft sculptural shell from the side. The design extends a named product language; it does not imply that ÌTURA has no other heart earrings.

SOURCE CONNECTION

ÌTURA describes Amara as “a little love, warmly wrapped” and lists 316L steel with lab-grown cubic zirconia. The Nest form interprets that existing piece rather than copying its necklace construction.



APPROVED FORM / THREE-QUARTER CAD VIEW

The same model, seen clearly.

Orthographic CAD views from FINAL/absolute final.blend. Dimensions below are evaluated mesh envelopes in millimetres, rounded to 0.01 mm. They describe this file, not an agreed manufacturing tolerance.

FRONT




9.34 mm

9.04 mm

9.04 W × 9.34 H mm

Face of metal shell; visible stone and three prongs.

PROFILE

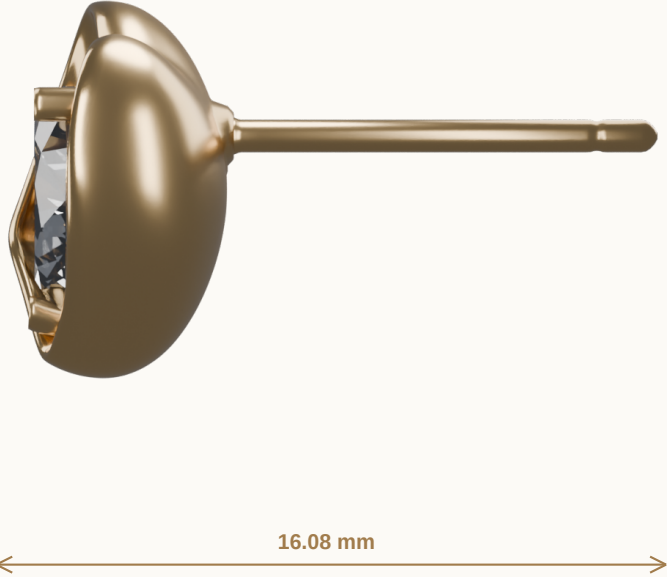


16.08 mm

5.58 mm head depth

Includes boss; visible post is provisional.

REAR

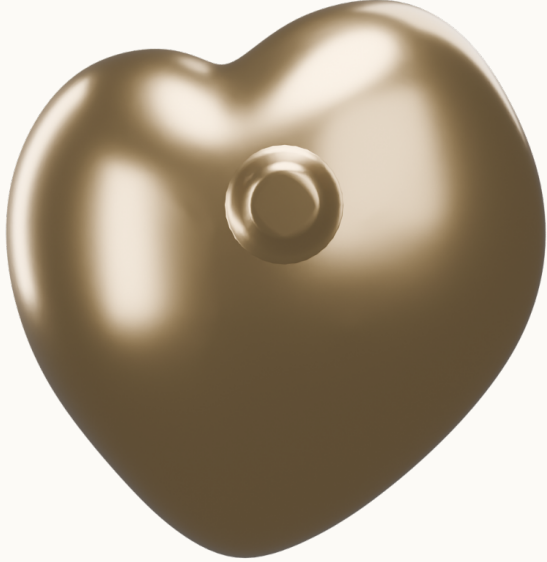

2.10 × 2.10 mm boss

Rear shell and attachment land; back not selected.

STONE PROXY	6.00 W × 6.00 H × 3.55 D mm	Heart-cut CZ category; actual supplier stone required.
POST CAD PROXY	0.92 diameter envelope × 10.60 L mm	Object name says 0.80 × 10.50 mm. Resolve mismatch.
ASSEMBLY DEPTH	16.08 mm	Frontmost visible geometry to post end; not a wear clearance.
DATUM / VIEW LOGIC	X = face width; Z = face height; +Y = rear/post direction. Front camera looks along +Y.	

A clear brief for the next decision.

Design owner approval covers the visible form. Before a supplier can quote or make a controlled sample, these choices and checks need to be fixed against a physical stone, selected finding and chosen metal route.

DESIGN SPECIFICATION / REV P1

ITEM	One stud CAD master; pair matching/handedness TBC
DESIGN STAGE	Owner-approved form; supplier review pending
METAL OPTION A	316L steel + gold-tone PVD; process and stack TBC
METAL OPTION B	.925 silver + 18k vermeil ≥ 3 μm; alternate
STONE	Heart-cut lab-grown CZ; CAD proxy 6 × 6 × 3.55 mm
HEAD ENVELOPE	9.04 W × 9.34 H × 5.58 D mm
POST & BACK	Provisional post geometry; purchased pair TBC
SURFACE INTENT	Warm gold; rounded polished lip, satin recess proposal
TOLERANCE	Unassigned; supplier/process capability required
UNIT COST / MOQ	No quote received; target to be set with ÌTURA
MANUFACTURING	Separate solids; union/export, process and joint TBC
PRODUCTION STATUS	No physical sample or manufacturing release

SUPPLIER QUESTIONS / SAMPLE GATES

01 Stone seat

Confirm the actual CZ girdle and pavilion profile, bearing cut, prong closure and minimum retained metal.

02 Finding

Select a post and matching butterfly; confirm post gauge, working length, joint method and pull strength.

03 Process

Confirm achievable alloy/process, local sections, casting or forming allowance, polishing access and dimensional variation.

04 Finish

Specify coating stack, gold color, thickness test, coverage at recesses, adhesion and wear plan.

05 Sample review

Inspect stone centering and security, surface/edge finish, post axis, back fit, lobe comfort and pair consistency.

06 Commercial

Request mold fee, unit quote, MOQ, lead time and revision/sample cost from an actual supplier.

RESEARCH BASIS

ÌTURA Amara product

ISO 129-1 dimension presentation

ÌTURA materials

Formlabs casting guide

ÌTURA designer role