

## COMBINATION HEATER THERMOSWITCH

### REPLACEMENT INSTRUCTION SHEET

#### TOOLS REQUIRED:

- Clean container for fuel
- Drain pan
- 1" Box end wrench
- Thread sealant
- Torque wrench
- 1" Crowfoot wrench


#### Removal Procedure

1. Remove vent cap on the cover of the Fuel Pro.
2. Drain the Fuel Pro completely into a clean container. Keep the fuel for reuse later.
3. Disconnect heater harness connector.
4. Place a drain pan under the Fuel Pro. Using a 1" box end wrench remove the combination heater thermoswitch.

#### Installation Procedure

1. Apply thread sealant to new combination heater thermoswitch.
2. Install and tighten to 15 ft-lb.
3. Reconnect the heater harness.
4. Using fuel drained during the removal procedure, refill the Fuel Pro and install the vent cap and tighten by hand only.

FUEL PRO W/ FLUID BOTTOM PLATE

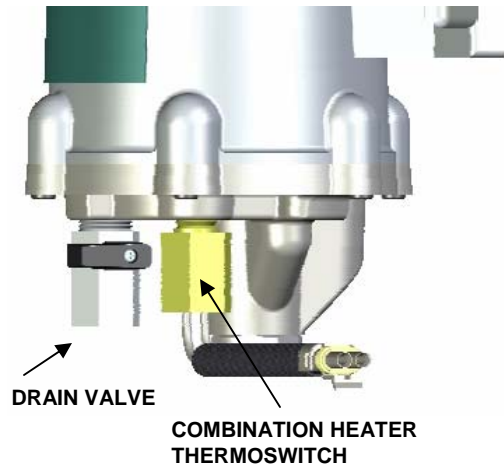

FUEL PRO W/ FLAT BOTTOM PLATE

