# EXPERIMENT 2

## IMPLEMENTATION OF STAR TOPOLOGY USING PACKET TRACER

### Aim

To implement a star topology using Packet Tracer and to transmit data between the devices connected in the star topology.

### Software Used

Cisco Packet Tracer (end devices, switch, connecting cables)

### Procedure

**Step 1:** Start Cisco Packet Tracer.

**Step 2:** Click **End Devices**, select the Generic PC and click in the workspace to place it. Place four PCs in the same way.

**Step 3:** Click **Switches**, select the 2950-24 switch and place it in the workspace.

**Step 4:** Click **Connections**, select the Copper Straight-Through cable, and connect each PC (FastEthernet) to the switch, so the switch is at the centre of the star.

**Step 5:** Wait until the amber link lights on the switch ports turn green. This happens after the Spanning Tree Protocol (STP) process finishes, and the ports can then forward frames.

**Step 6:** Click PC0, open the **Config** tab, select FastEthernet0 and type the IP address. The subnet mask is generated automatically. Do the same for every PC with a different IP address.

**Step 7:** To confirm data transfer, click a PC, open **Desktop** and then **Command Prompt**, and ping the IP address of another PC. The ping statistics are displayed.

## Execution Screenshot

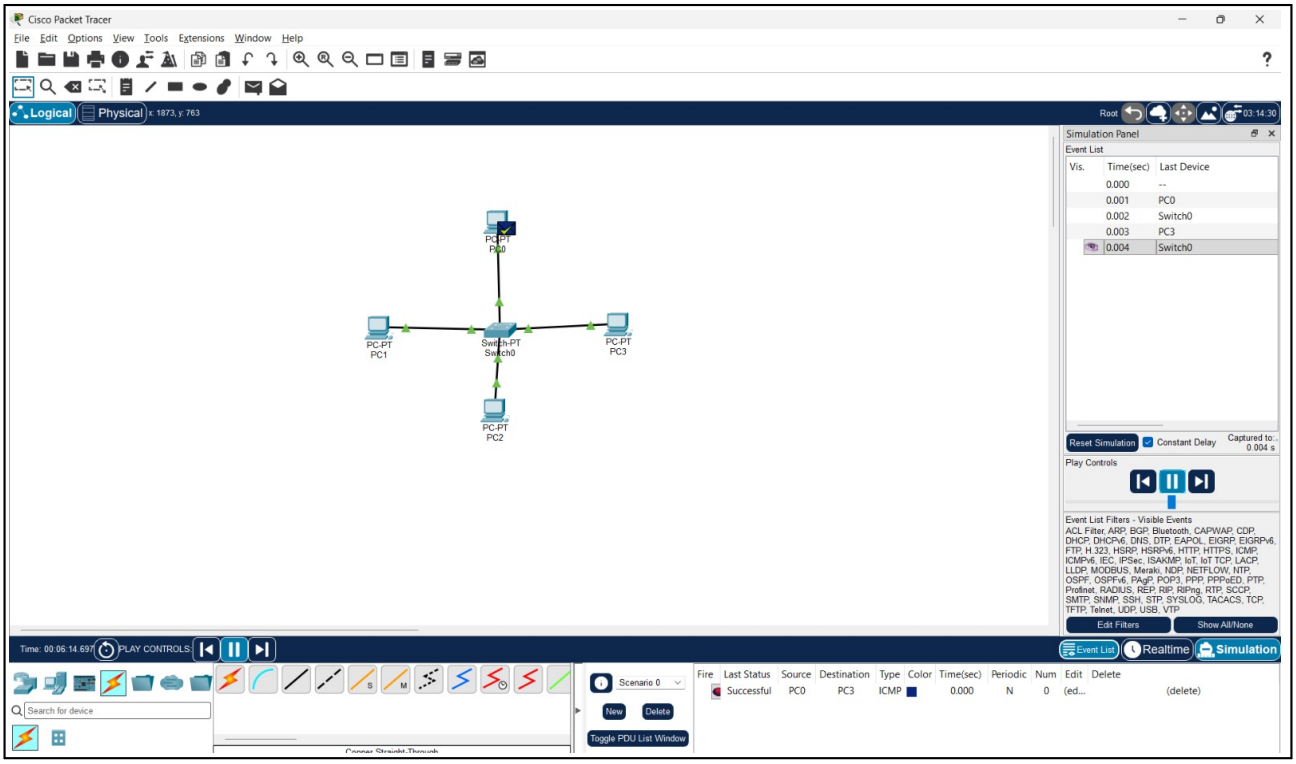



**Fig: Star topology with ICMP ping from PC0 to PC3**

## Result

Thus the star topology is implemented with the Packet Tracer simulation tool.