# EXPERIMENT 3

## IMPLEMENTATION OF BUS TOPOLOGY USING PACKET TRACER

### Aim

To implement a bus topology using Packet Tracer and to transmit data between the devices connected in the bus topology.

### Software Used

Cisco Packet Tracer (end devices, hub, connecting cables)

### Procedure

**Step 1:** Start Cisco Packet Tracer.

**Step 2:** Click **End Devices**, select the Generic PC and click in the workspace to place it. Place four PCs in the same way.

**Step 3:** Click **Hubs**, select the generic Hub and place it in the workspace.

**Step 4:** Click **Connections**, select the Copper Straight-Through cable, and connect each PC (FastEthernet) to the hub so that all PCs share the same medium.

**Step 5:** Wait until the amber link lights on the switch ports turn green. This happens after the Spanning Tree Protocol (STP) process finishes, and the ports can then forward frames.

**Step 6:** Click PC0, open the **Config** tab, select FastEthernet0 and type the IP address. The subnet mask is generated automatically. Do the same for every PC with a different IP address.

**Step 7:** To confirm data transfer, click a PC, open **Desktop** and then **Command Prompt**, and ping the IP address of another PC. The ping statistics are displayed.

## Execution Screenshot

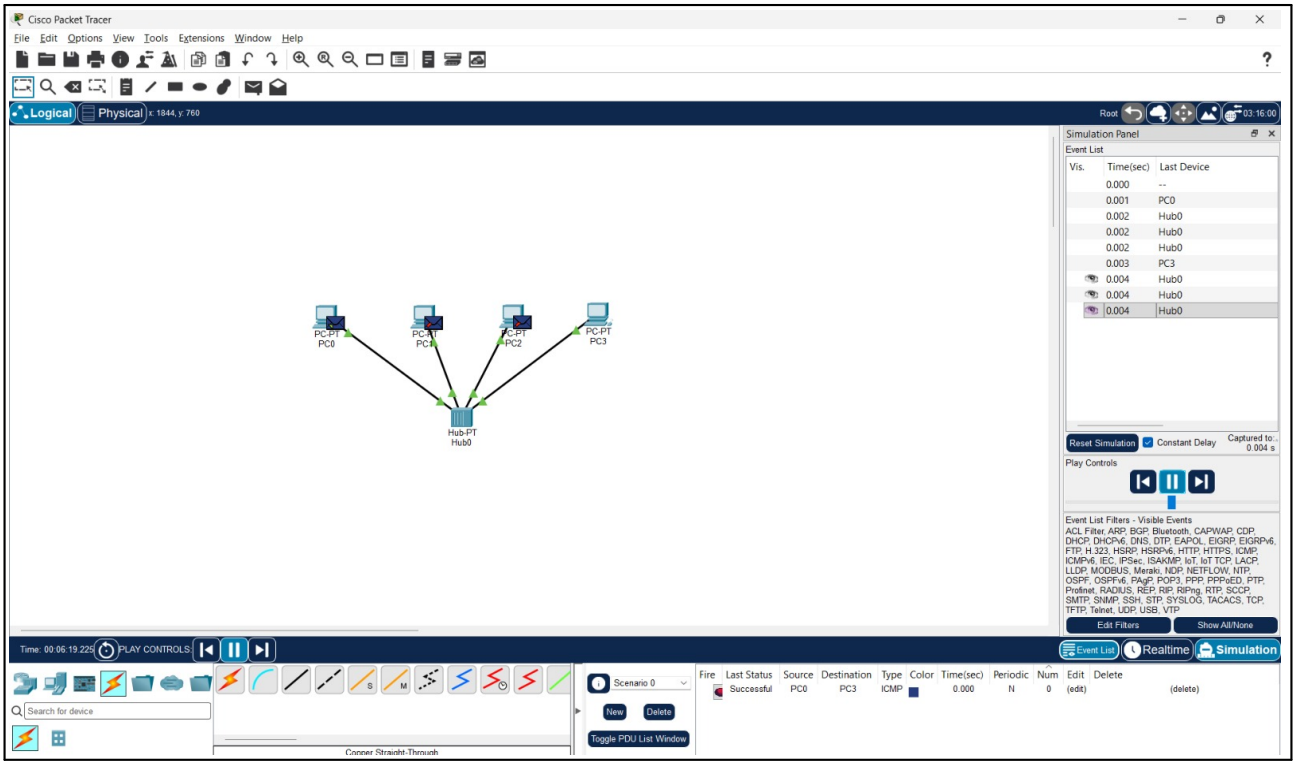



**Fig: Bus topology using a hub, with ICMP packets in Simulation mode**

## Result

Thus the bus topology is implemented with the Packet Tracer simulation tool.