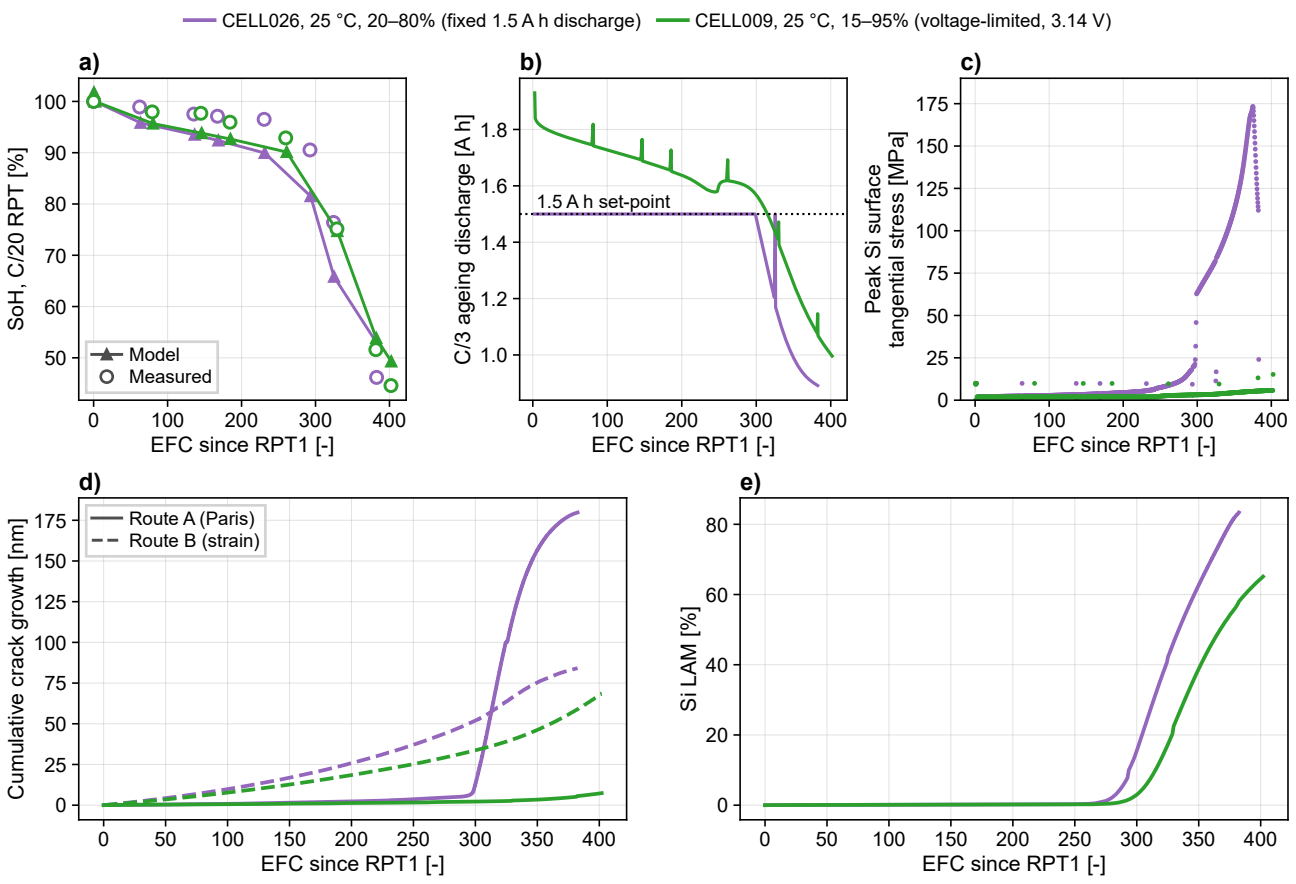

CELL026, 25 °C, 20–80% (fixed 1.5 A h discharge)
CELL009, 25 °C, 15–95% (voltage-limited, 3.14 V)
a)
SoH, C/20 RPT [%]
Model
Measured
EFC since RPT1 [-]
b)
C/3 ageing discharge [A h]
1.5 A h set-point
EFC since RPT1 [-]
c)
Peak Si surface tangential stress [MPa]
EFC since RPT1 [-]
d)
Cumulative crack growth [nm]
Route A (Paris)
Route B (strain)
EFC since RPT1 [-]
e)
Si LAM [%]
EFC since RPT1 [-]